Graphical Symbols for Pipe Fittings, Valves ASMENORMBOC.COM. Citak to view the full Policy of ASME and Piping

The American Society of Mechanical Engineers

Published by

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

United Engineering Center

345 East 47th Street

New York , N. Y. 10017

FOREWORD

This standard has been developed by the ASA Sectional Committee on Standardization of Graphical Symbols and Abbreviations for Use on Drawings, Z32. The work of this committee is under the joint sponsorship of the American Institute of Electrical Engineers and the American Society of Mechanical Engineers.

The standard is the second of a group of standards which represent a revision and expansion of an existing standard, American Standard Graphical Symbols for Use on Drawings in Mechanical Engineering, Z32.2-1941.

In preparing the list of pipe fittings, valves, and piping symbols for use on drawings, over one hundred companies and their representatives were consulted. Great care was exercised to avoid conflicts with the symbols being assembled by committees in allied fields.

The 73 symbols shown are a minimum requirement. Many other piping symbols exist; for instance, such as those used in petroleum piping.

Following approval of the sectional committee and the sponsor organizations, this proposal was approved by the American Standards Association on April 8, 1949, and designated as Z32.2.3-1949.

Officers of Sectional Committee on Standardization of Graphical Symbols and Abbreviations for Use on Drawings, Z32

S. L. Heard, Chairman W. J. Kunz, Vice-Chairman W. H. Deacy, Sr., Secretary

Personnel of Subgroup No. 4 on Pipe Fittings and Valve Symbols of Subcommittee No. 1 on Symbols for Use in Mechanical Engineering

L. W. Benoit, Chairman, Gen. Secy, Manufacturers Standardization Society of the Valve and Fittings Industry, New York, N.Y.

Bureau of Ships, Code 350, U. S. Navy Department, Washington, D.C.

Royal J. Cooney, John H. Cooney, Inc., Harrison, N.J.

L. W. Kattelle, Asst. Ch Engr, Walworth Company, New York, N.Y.

A. E. Spitzfaden, Asst. Ch Draftsman, Consolidated Edison Co. of New York, New York, N.Y.

W. N. Zippler, Gibbs & Cox, Inc., New York, N.Y.

AMERICAN NATIONAL STANDARD

This standard is one of more than 4000 approved as either a USA Standard or as an American Standard. It became an American National Standard in October 1969 when the Institute changed its name to American National Standards Institute, Inc.

Copyright, 1949, by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
Printed in U.S.A.

American Standard

GRAPHICAL SYMBOLS FOR PIPE FITTINGS, VALVES, AND PIPING


Scope

This standard has been developed for use on drawings. Architects, engineers, and contractors, by the use of these symbols on their plans, will have a standard method of indication for pipe fittings, valves, piping and allied items. Confusion in the interpretations of requirements can thus be avoided.

Basic Principles

Clarity and simplicity were considered paramount in the assembling of these symbols. Whenever possible, simplification in the drafting was primarily considered and identification letters were used only when there was a question of an error because of similarity of form. Only those symbols, about which there was nationwide consensus, were included. There are still many symbols that are used in a particular section but are not nationally recognized.

AMERICAN STANDARD					
	FLANGED	SCREWED	BELL & SPIGOT	WELDED	SOLDERED
I BUSHING		-	6 4	- * 	-dþ
2 CAP			$ \rightarrow $		10AO
3 CROSS	2	_12	.2	,,,2 J	3
3.1 REDUCING	6 # 6	6 6	5 0 6 ↑ 6 ↑ 4	6 X X X X X X X X X X X X X X X X X X X	6 6 0 4
3.2 STRAIGHT SIZE	+ + + + + + + + + + + + + + + + + + + +	+ + + + + + + + + + + + + + + + + + + +	J	* * * * *	0 0
4 CROSSOVER		1 ✓ 1 ✓) J		
5 ELBOW	×	ien i	./	. 1 1	~
5.1 45-DEGREE		*****		*	6
5.2 90-DEGREE			-	*	
5.3 TURNED DOWN		\bigcirc	() 	- ×	() 0
5.4 TURNED UP	• +	<u>⊙</u> →	$\stackrel{\circ}{\bullet} \rightarrow$	<u>•</u> ×	<u>•</u>
5.5 BASE					
5.6 DOUBLE BRANCH	+++	+++			

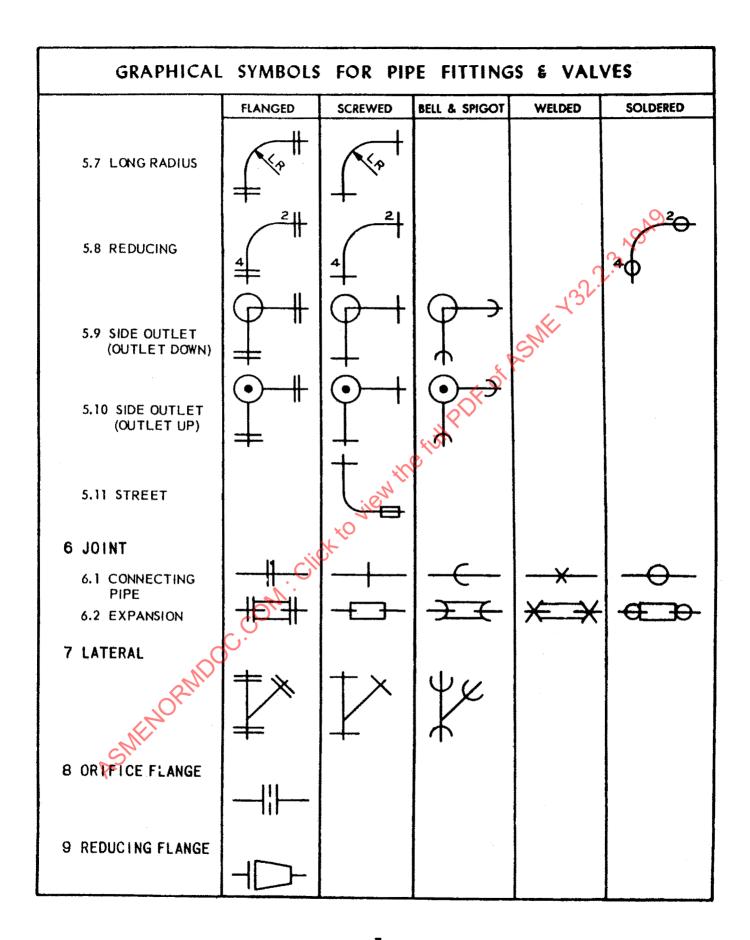

AMERICAN STANDARD						
	FLANGED	SCREWED	BELL & SPIGOT	WELDED	SOLDERED	
IO PLUGS	11		<u> </u>			
10.1 BULL PLUG			0		٥	
10.2 PIPE PLUG		\dashv		0	3,040	
II REDUCER				رمك		
11.1 CONCENTRIC	#		→>>	**	4 > 0	
11.2 ECCENTRIC	+4	4	2	*	0	
12 SLEEVE			Call PD.	-X X-	-00	
		1	3	_XX-		
13 TEE	===	ien	(1)	¥	Φ.	
13.1 (STRAIGHT SIZE)	# #	****	<u> </u>	* 1 ×		
13.2 (OUTLET UP)	191	+-0+) ⊙€	*- •*	$\Theta \Theta \Theta$	
13.3 (OUTLET DOWN)	# 	+ +	>0c	* 	000	
13.4 DOUBLE SWEEP)	#	+ 4		_		
13.5 REDUCING		6 4	$\frac{1}{2} \frac{1}{2} \frac{1}{4} \frac{1}{2} \frac{1}$	X ₆ 4X	φ² 0 ₆ 40	
13.6 SINGLE SWEEP)	# _ #	+ +				

GRAPHICAL SYMBOLS FOR PIPE FITTINGS & VALVES						
	FLANGED	SCREWED	BELL & SPIGOT	WELDED	SOLDERED	
13.7 SIDE OUTLET (OUTLET DOWN) 13.8 SIDE OUTLET (OUTLET UP)	# # #	+++++++++++++++++++++++++++++++++++++++	→ C → C → C	, c	194 ⁹	
14 UNION	1 1			132.10		
IE ANCIEVALVE	 			-X Killi	-a b-	
15 ANGLE VALVE	I	<u> </u>	COLD	_بدا	h	
15.1 CHECK			NA PARTY	*		
15.2 GATE (ELEVATION)	4	White was		**		
15.3 GATE (PLAN)	31/16	3		X *		
15.4 GLOBE (ELEVATION)				*		
15.5 GLOBE (PLAN)		%		X *	%	
15.6 HOSE ANGLE	SAME AS	SYMBOL	23.1			
16 AUTOMATIC VALVE 16.1 BY-PASS	*					

AMERICAN STANDARD						
	FLANGED	SCREWED	BELL & SPIGOT	WELDED	SOLDERED	
16.2 GOVERNOR- OPERATED					NOAO	
16.3 REDUCING	‡- 			ASME TOD	ns.	
17 CHECK VALVE			Ç	RSIA		
17.1 ANGLE CHECK	SAME AS	SYMBOL	15,1			
17.2 (STRAIGHT WAY)	# #	→	-X-C	**	-d b-	
18 COCK			S S			
19 DI APHRAGM	4 0 H	104	$\rightarrow \Box \leftarrow$	¥□k	a∏þ	
VALVE 20 FLOAT VALVE	1					
RMD				[[-a)_\b-	
21 GATE VALVE						
*21.1 SM	→	>>-	→	*>>>	-e X e-	
21.2 ANGLE GATE	SAME AS	SYMBOLS	15.2 & 15.3	`		
21.3 HOSE GATE	SAME AS	SYMBOL	23.2			

^{*}ALSO USED FOR GENERAL STOP VALVE SYMBOL WHEN AMPLIFIED BY SPECIFICATION

GRAPHICAL SYMBOLS FOR PIPE FITTINGS & VALVES					
	FLANGED	SCREWED	BELL & SPIGOT	WELDED	SOLDERED
21.4 MOTOR- OPERATED	¥ = = = = = = = = = = = = = = = = = = =			***************************************	
22 GLOBE VALVE 22.1		→>	> ✓	***	-e>~(p-
22.2 ANGLE GLOBE	SAME AS	SYMBOLS	15.4 & 15.5	J.	.9
22.3 HO\$E GLOBE	SAME AS	SYMBOL	23.3	1,7,3	
22.4 MOTOR- OPERATED 23 HOSE VALVE	—		of of	***************************************	
23.1 ANGLE			full PDF of		
23.2 GATE	₩	— V			
23.3 GLOBE					
24 LOCKSHIELD VALVE	105 	- -			-elZte-
25 QUICK OPENING VALVE	#	\nearrow		***	-aXe-
26 SAFÉTY VALVE	+12621+	-1341-	->\$ (* }{*	-dXb-
27 STOP VALVE	SAME AS	SYMBOL	21.1		