
**Road vehicles — Electrical and electronic
equipment for a supply voltage of 42 V —
Electrical loads**

*Véhicules routiers — Équipement électrique et électronique pour une
tension d'alimentation de 42 V — Contraintes électriques*

STANDARDSISO.COM : Click to view the full PDF of ISO 21848:2005



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 21848:2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Supply voltage	2
4.1 Direct current	2
4.2 Overvoltages	3
4.3 Superimposed alternating voltage	4
4.4 Slow decrease and increase of supply voltage	6
4.5 Discontinuities in supply voltage	6
4.6 Reversed voltage	8
4.7 Open-circuit tests	9
4.8 Short-circuit protection	10
4.9 Withstand voltage	11
4.10 Insulation resistance	12
4.11 Electromagnetic compatibility	12
Bibliography	13

STANDARDSISO.COM : Click to view the full PDF of ISO 21848:2005

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 21848 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

STANDARDSISO.COM : Click to view the full PDF of ISO 21848:2005

Road vehicles — Electrical and electronic equipment for a supply voltage of 42 V — Electrical loads

1 Scope

This International Standard describes the electrical loads that can affect electric and electronic systems and components of road vehicles for a supply voltage of 42 V, which may be used in a single or a multiple voltage electrical system.

In addition, it specifies the tests and resulting requirements, test equipment accuracy being agreed upon between the vehicle manufacturer and the supplier. It does not cover electromagnetic compatibility (EMC).

NOTE Electrical loads are independent from the mounting location.

This International Standard also provides design guidance for the interaction of 42 V with other system voltages.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7637-2, *Road Vehicles — Electrical disturbances by conduction and coupling — Part 2: Electrical transient conduction along supply lines only*

ISO 16750-1:2003, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 1: General*

ISO 16750-2:2003, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 2: Electrical loads*

ISO 16750-4:2003, *Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 4: Climatic loads*

UL¹⁾ 94, *Standard for Test for Flammability of Plastic Materials for Parts in Devices and Appliances*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 16750-1 and the following shall apply.

3.1

U_{high}
upper limit of the normal d.c. supply voltage range

1) Underwriters Laboratories Inc.

3.2

U_{low}

lower limit of the normal d.c. supply voltage range

3.3

$U_{max,dyn}$

maximum dynamic overvoltage associated with generator load dump transient protection

3.4

U_T

voltage applied during testing under defined conditions and which may be static voltage or transient

3.5

U_S

minimum permissible dynamic undervoltage associated with the starting pulse

3.6

U_A

minimum permissible steady-state voltage during cranking of the combustion engine including a possible ripple

4 Supply voltage

4.1 Direct current

4.1.1 Purpose

This test verifies the device under test (DUT) functionality in the range between minimum and maximum supply voltage.

4.1.2 Test

Set the supply voltage in accordance with Table 1 to all relevant inputs (connections) of the DUT.

Measure all voltages at the relevant terminals of the DUT.

The voltages given in Table 1 are relevant within the operating temperature range according to ISO 16750-4:2003, Table 1, without time limits.

Table 1 — Supply voltage for $U_N = 42$ V system devices

Code	Supply voltage V	
	U_{low}	U_{high}
L	30	48

4.1.3 Requirement

All DUT functions shall remain Class A as defined in ISO 16750-1:2003, Clause 6.

4.2 Overvoltages

4.2.1 Maximum continuous voltage

Under all conditions the maximum continuous supply voltage for the DUT shall not exceed U_{high} according to Table 1.

4.2.2 Maximum dynamic voltage

4.2.2.1 Immunity


Except for 4.2.2.1.1 to 4.2.2.1.3 below, immunity to voltage transients shall be in accordance with ISO 7637-2:2004.

4.2.2.1.1 Purpose

This test verifies functionality of the DUT when subjected to the maximum dynamic voltage, $U_{\text{max,dyn}}$. It simulates the maximum dynamic voltage for high-energy pulses in a 42 V vehicle electrical system, caused by load dump, and is the upper voltage limit for load dump protection.

4.2.2.1.2 Test

Apply one test pulse to the DUT according to Figure 1.

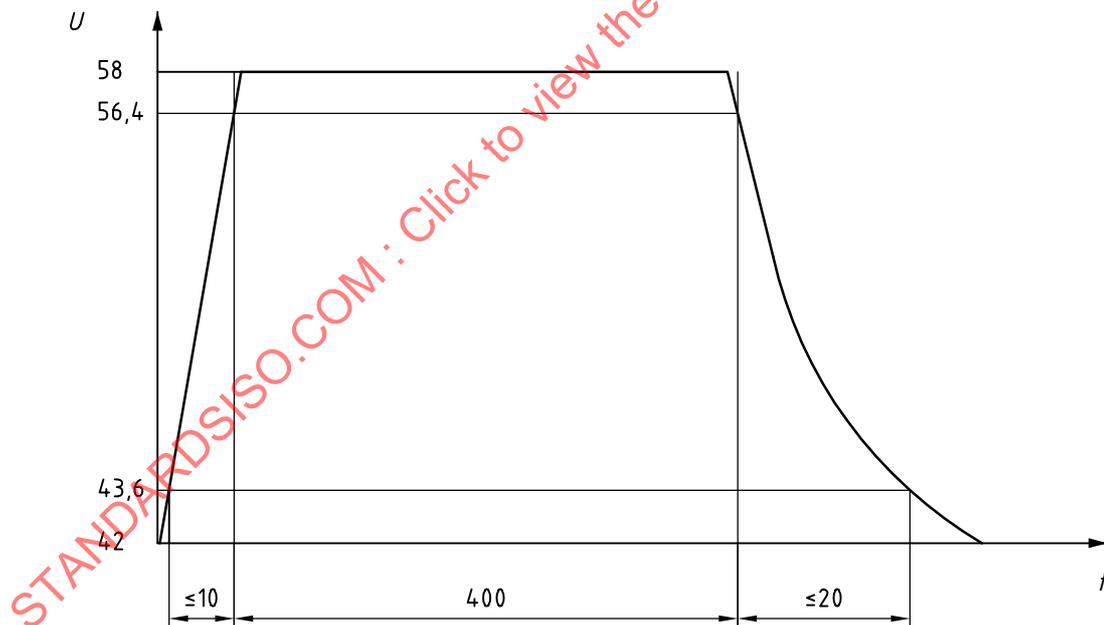

Key

t time, ms
 U voltage, V

Figure 1 — Test pulse for $U_{\text{max,dyn}}$

The internal resistance R_i of the load dump test pulse generator shall be (100 to 500) m Ω .

4.2.2.1.3 Requirement

The functional status shall be minimum Class D according to ISO 16750-1:2003, Clause 6. Special requirements may be agreed between vehicle manufacturer and supplier.

4.2.2.2 Emission

No electrical and electronic equipment shall produce a voltage on the network exceeding 50 V except the generator during load dump and pulses as specified by ISO 7637-2.

Except for 4.2.2.1.1 to 4.2.2.1.3, measures shall be taken to ensure that 50 V is never exceeded (e.g. protection devices at the source and/or adjustment of generator voltage).

4.3 Superimposed alternating voltage

4.3.1 Purpose

This test simulates a.c. on the d.c. supply.

The DUT is checked for undesirable resonance modes and induced thermal stress.

4.3.2 Test

Connect the DUT as shown in Figure 2. Perform the test, in accordance with Table 2 and Figure 2, simultaneously on all applicable inputs (connections) of the DUT.

NOTE Do not apply these test voltages to the battery.




Figure 2 — Test set-up for superimposing a.c. voltage on component power supply lines

Table 2 — Test values

Test voltage (see Figure 3)	$U_{dc} + 0,5 U_{PP} \sin(\omega t)$
a.c. voltage (sinusoidal)	a) $U_{dc} = 48 \text{ V}; U_{PP} = 4 \text{ V}$ for 50 Hz to 1 kHz b) $U_{dc} = 48 \text{ V}; U_{PP} = 1 \text{ V}$ for 1 kHz to 20 kHz c) $U_{dc} = 32 \text{ V}; U_{PP} = 4 \text{ V}$ for 50 Hz to 1 kHz d) $U_{dc} = 32 \text{ V}; U_{PP} = 1 \text{ V}$ for 1 kHz to 20 kHz
Internal resistance of power supply	50 mΩ to 100 mΩ
Frequency range	See Figure 4
Type of frequency sweep	See Figure 4
Sweep duration (one sweep) (see Figure 4)	120 s
Number of continuous sweeps per test	5

4.3.3 Requirement


The functional status shall be Class A according to ISO 16750-1:2003, Clause 6.

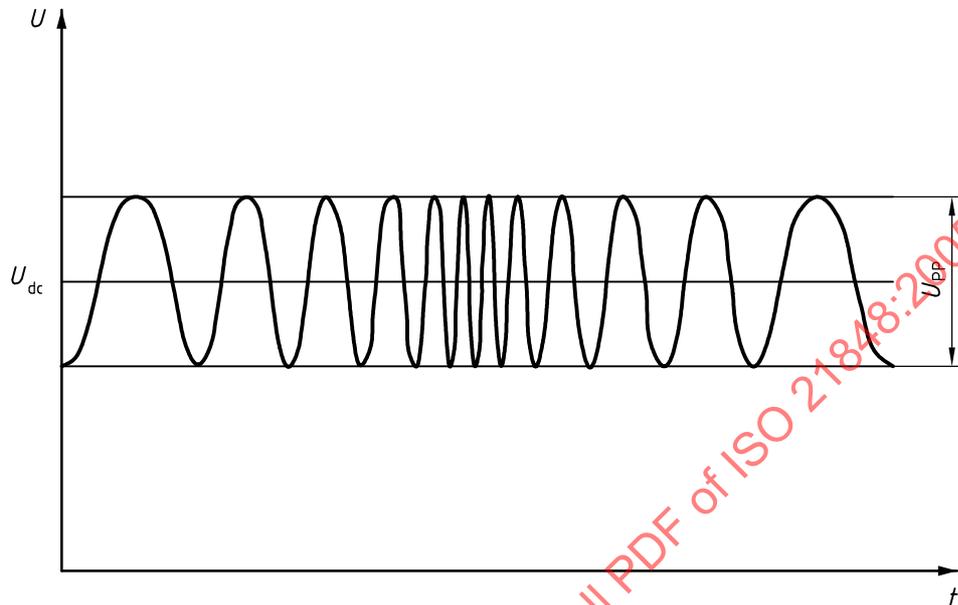

Key

- U voltage, V
- t time, s

Figure 3 — Test voltage with superimposed sinusoidal a.c. voltage

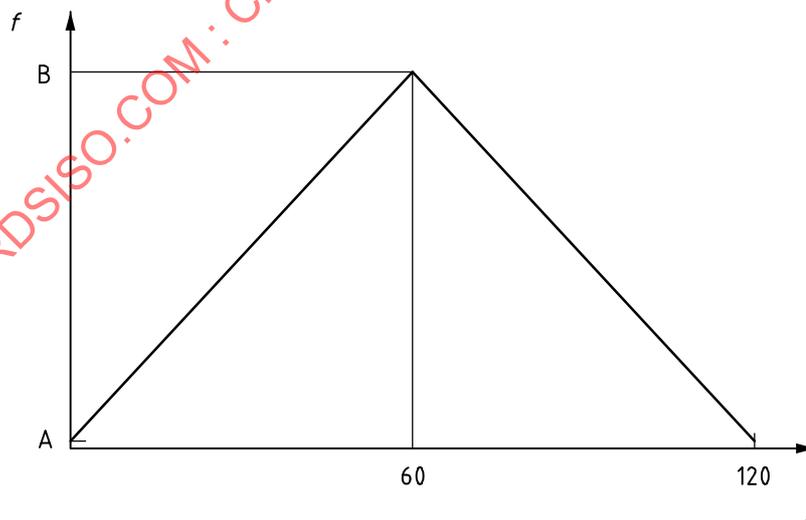

Key

- f frequency, Hz logarithmic scale
- t time, s
- A 50 Hz [Table 2, a) and c)] or 1 kHz [Table 2, b) and d)]
- B 1 kHz [Table 2, a) and c)] or 20 kHz [Table 2, b) and d)]

Figure 4 — Frequency sweep

4.4 Slow decrease and increase of supply voltage

4.4.1 Purpose

This test verifies functional status operation according to the specification of the DUT when subjected to a gradual discharge and recharge of the battery.

4.4.2 Test

Apply the following test simultaneously to all applicable inputs (connections) of the DUT.

Decrease the supply voltage from U_{high} to 0 V and then increase it from 0 V to U_{high} , applying a change rate of $(3 \pm 0,1)$ V/min, unless otherwise specified.

4.4.3 Requirement

The functional status shall be Class A as defined in ISO 16750-1:2003, Clause 6, between U_{high} and U_{low} .

The functional status shall be a minimum of Class D as defined in ISO 16750-1:2003, Clause 6, between U_{low} and 0 V.

4.5 Discontinuities in supply voltage


4.5.1 Momentary drop in supply voltage

4.5.1.1 Purpose

This test verifies functional status operation according to the specification of the DUT when subjected to a momentary voltage drop. It simulates the impact on the power supply of a short circuit in another branch while a fuse element melts and clears.

4.5.1.2 Test

Expose all relevant inputs (connections) of the DUT to the test pulse given in Figure 5.

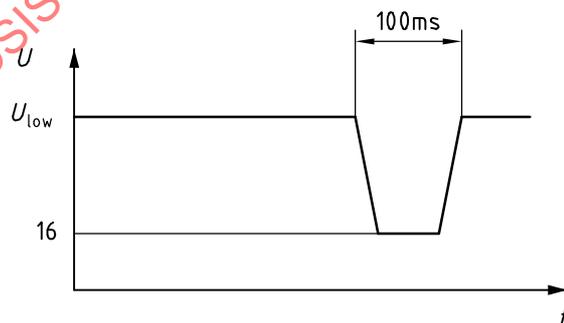

Key

- t time, s
- U voltage, V

Figure 5 — Momentary voltage drop

The rise time and fall time between U_{low} and the 16 V level shall be ≤ 10 ms.

4.5.1.3 Requirement

The functional status shall be Class B as defined in ISO 16750-1:2003, Clause 6. Class C is permitted upon agreement.

4.5.2 Reset behaviour at voltage drop


4.5.2.1 Purpose

This test verifies the reset behaviour of the DUT at different voltage drops. It is applicable to equipment with a reset function (e.g. equipment containing one or more microcontrollers).

4.5.2.2 Test

Apply the test pulses in accordance with Figure 6 as specified in the application, and check the reset behaviour of the DUT.

Decrease the supply voltage by 5 % from U_{low} to $0,95 U_{low}$. Hold this voltage for 5 s. Raise the voltage to U_{low} . Hold U_{low} for at least 10 s and perform a functional test. Then decrease the voltage to $0,9 U_{low}$, etc. Continue in steps of 5 % of U_{low} as shown in Figure 6 until the lower value has reached 0 V. Then raise the voltage to U_{low} again.

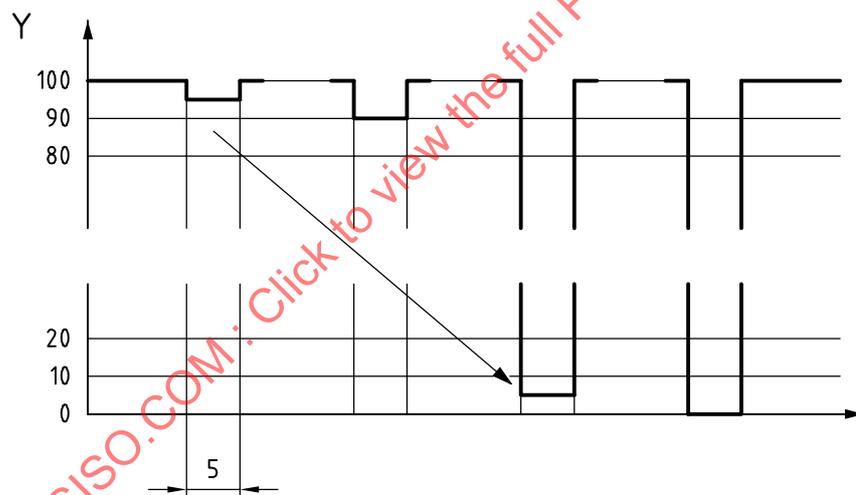

Key

Y U_{low} , %
 t time, s

Figure 6 — Supply voltage profile for reset test

The rise time and fall time shall be between 10 ms and 1 s.

4.5.2.3 Requirement

The functional status shall be Class C as defined in ISO 16750-1:2003, Article 6.


4.5.3 Starting profile

4.5.3.1 Purpose

This test verifies the behaviour of a DUT during and after cranking.

4.5.3.2 Test

Apply the starting profile as specified in Figure 7, with the values given in Table 3, simultaneously to all relevant inputs (connections) of the DUT.

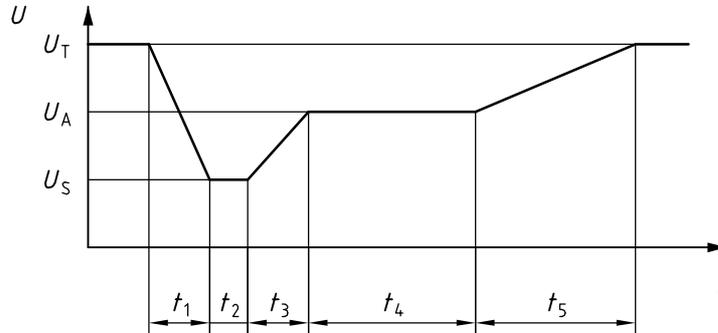

Key

- t time, s
- U voltage, V

Figure 7 — Starting pulse

Table 3 — Voltage profile of the starting pulse

U_T V	U_S V	U_A V	t_1 ms	t_2 ms	t_3 ms	t_4 ms	t_5 ms
42	18	21	5	15	50	10 000	100

4.5.3.3 Requirement

Functions that are relevant to vehicle operation during cranking shall be Class A. For special requirements, Class B may be agreed between vehicle manufacturers and suppliers.

Functions not required during cranking shall be minimum Class C according to 16750-1:2003, Clause 6.

Special requirements for voltages and durations during t_1 , t_2 , and/or t_3 may be agreed between vehicle manufacturers and suppliers

4.6 Reversed voltage

4.6.1 Purpose

The test is a check of the robustness of the DUT against the connection of a reversed battery.

This test shall only be applied to DUTs used in a 42 V electrical system incorporating centralized reverse voltage protection consisting of a series fuse and a reverse polarity shunt diode.

This test is not applicable

- to generators, or
- to relays with clamping diodes without external reverse polarity protection device.

4.6.2 Test

Apply a negative voltage simultaneously to all relevant power terminals of the DUT.

Conditions are the following:

- a) $U_T = -2 \text{ V}$
- b) $t = 100 \text{ ms}$ (duration of the applied voltage)
- c) $R_i = 1 \text{ m}\Omega$ (internal resistance of the battery source)

NOTE The duration t and voltage U_T are chosen on the basis of the capability of current semiconductor and fuse technology.

4.6.3 Requirement

The functional status shall be Class C as defined in ISO 16750-1:2003, Clause 6.

NOTE Design precautions shall be taken to ensure -42 V cannot be applied to any component (e.g. loss of common ground).

4.7 Open-circuit tests

4.7.1 Single line interruption

4.7.1.1 Purpose

This test simulates a rapid single line interruption.

NOTE This is not a test for connectors. Because of potential arcing damage to a contact if opened under load, it is recommended that the single line interruption be created and restored electronically.

4.7.1.2 Test

Connect and operate the DUT as intended. Open one contact of the DUT interface. Then restore the connection. Observe the device behaviour during and after the interruption.

- Test voltage $U_T = 42 \text{ V}$
- Interruption time $t = (10 \pm 1) \text{ s}$
- Open-circuit resistance $R \geq 10 \text{ M}\Omega$

Repeat for each contact of the DUT interface.

4.7.1.3 Requirement

The functional status shall be Class C as defined in ISO 16750-1:2003, Clause 6.

4.7.2 Multiple line interruption

4.7.2.1 Purpose

This test is to evaluate the effect when the DUT is subjected to a rapid multiple line interruption.

NOTE This is not a test for connectors. Because of potential arcing damage to a contact if opened under load, it is recommended that the multiple line interruption be created and restored electronically.

4.7.2.2 Test

Connect and operate the DUT as intended. Open one connector of the DUT interface. Then restore the connection. Observe the device behaviour during and after the interruption.

- Test voltage $U_T = 42 \text{ V}$
- Interruption time $t = (10 \pm 1) \text{ s}$
- Open-circuit resistance $R \geq 10 \text{ M}\Omega$

Repeat for each connection of the DUT interface.

4.7.2.3 Requirement

The functional status shall be Class C as defined in ISO 16750-1:2003, Clause 6.

4.8 Short-circuit protection

4.8.1 Signal circuits

4.8.1.1 Purpose

This test simulates short circuits to the signal inputs of a device.

NOTE This test is applicable only to DUTs with internal electronics.

4.8.1.2 Test

Set $U_T = U_{\text{high}}$. Connect all relevant signal inputs of the DUT in sequence for a duration of 60 s to U_T and to ground.

NOTE Signal return circuits are considered grounds and are exempted from test 4.8.1.2. Connection of a signal return to unfused U_{high} will damage the DUT.

Perform this test with

- a) supply voltage and ground connected,
- b) supply voltage disconnected, and
- c) ground disconnected.

4.8.1.3 Requirement

The functional status shall be Class C as defined in ISO 16750-1:2003, Clause 6.

4.8.2 Load circuits

4.8.2.1 Purpose

This test verifies that all output load drivers for 42 V loads shall withstand the short-circuit currents as allowed by the corresponding protection. Values shall be given in the specification of the DUT.

4.8.2.2 Test

Connect the DUT to a power supply with $U_T = U_{\text{high}}$ and $R_i = (20 \text{ to } 100) \text{ m}\Omega$. The outputs shall be in operation.