
**Hydraulic fluid power — Valves
— Determination of differential
pressure/flow rate characteristics**

*Transmissions hydrauliques — Distributeurs — Détermination des
caractéristiques de pression différentielle/débit*

STANDARDSISO.COM : Click to view the full PDF of ISO 4411:2019



STANDARDSISO.COM : Click to view the full PDF of ISO 4411:2019



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and units	2
5 Test installations	2
5.1 Selection, calibration and installation of equipment	2
5.2 Test circuit	2
5.3 Pressure-tapping points	4
6 Test procedures	5
6.1 Measurement accuracy	5
6.2 Test fluid	5
6.3 Temperatures	5
6.4 Steady-state conditions	5
6.5 Procedure	6
6.6 Pressure differential calculation	6
6.7 Presentation of the test results	6
6.7.1 General	6
6.7.2 Presentation	6
7 Identification statement (Reference to this document)	7
Annex A (informative) Use of practical units	8
Annex B (informative) Pre-test checklist	9
Bibliography	10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 5, *Control products and components*.

This third edition cancels and replaces the second edition (ISO 4411:2008), which has been technically revised. The main changes compared to the previous edition are as follows:

- “volume flow rate” is replaced with “flow rate”;
- “flow rate symbol q_v ” is replaced with “ q ”;
- updated and improved quality of [Figure 1](#) and [Figure 2](#).

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit. Hydraulic valves control the direction, pressure or flow rate of the fluid in the system.

When fluid flows through a valve, it encounters some resistance, which results in a loss of pressure; this loss is called the pressure differential.

This document is intended to unify testing methods for hydraulic fluid power valves to enable the pressure differential/flow characteristics of different valves to be compared.

STANDARDSISO.COM : Click to view the full PDF of ISO 4411:2019

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 4411:2019

Hydraulic fluid power — Valves — Determination of differential pressure/flow rate characteristics

1 Scope

This document specifies methods for determining, under steady-state conditions, the pressure differential caused by the flow through any given path in a hydraulic fluid power valve. Requirements for test installations, procedures and presentation of results are specified.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4401, *Hydraulic fluid power — Four-port directional control valves — Mounting surfaces*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 5781, *Hydraulic fluid power — Pressure-reducing valves, sequence valves, unloading valves, throttle valves and check valves — Mounting surfaces*

ISO 6263, *Hydraulic fluid power — Compensated flow-control valves — Mounting surfaces*

ISO 6264, *Hydraulic fluid power — Pressure-relief valves — Mounting surfaces*

ISO 9110-1, *Hydraulic fluid power — Measurement techniques — Part 1: General measurement principles*

ISO 9110-2, *Hydraulic fluid power — Measurement techniques — Part 2: Measurement of average steady-state pressure in a closed conduit*

ISO 10372, *Hydraulic fluid power — Four- and five-port servovalves — Mounting surfaces*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

tare pressure differential

pressure loss between the pressure-tapping points as generated by the test equipment exclusive of the test valve

3.2

measured pressure differential

measured pressure loss between the pressure-tapping points, including the pressure loss through the test valve and the test equipment

3.3**flow rate** q

rate of flow at the point of measurement

3.4**pressure differential** Δp

pressure loss attributed to the test valve

4 Symbols and units

4.1 The symbols and units used throughout this document are shown in [Table 1](#).

4.2 The graphical symbols used in [Figures 1](#) to [3](#) are in accordance with ISO 1219-1.

Table 1 — Symbols and units

Reference subclause	Quantity	Symbol	Dimension ^a	Unit ^b
3.3	Flow rate	q	l^3t^{-1}	m ³ /s
3.4	Pressure differential	Δp	$ml^{-1}t^{-2}$	Pa ^c
—	Inside diameter of tube	d	l	m
—	Temperature	θ	θ	°C
—	Kinematic viscosity	ν	l^2t^{-1}	m ² /s
—	Mass density	ρ	ml^{-3}	kg/m ³

^a m signifies mass, l signifies length, t signifies time.

^b The use of practical units for the presentation of results is described in [Annex A](#).

^c 1 Pa = 1 N/m².

5 Test installations

NOTE [Annex B](#) provides a checklist for the selection of appropriate items upon which agreement between the parties concerned is recommended prior to testing.

5.1 Selection, calibration and installation of equipment

5.1.1 Equipment shall be selected in accordance with ISO 9110-2.


5.1.2 Calibration shall be carried out in accordance with ISO 9110-1.

5.1.3 The test set-up shall be in accordance with ISO 9110-2.

5.2 Test circuit

5.2.1 A circuit suitable for testing valves as shown in [Figure 1](#) shall be used. The requirements for the position of the pressure-measuring connections and the flow meter shown in [Figure 1](#) and referred to in [5.2.5](#) to [5.2.9](#) apply only to Class A measurement accuracy.

[Figure 1](#) illustrates a basic circuit that does not incorporate all the safety devices necessary to protect against damage in the event of component failure. It is important that those responsible for carrying out the test give due consideration to safeguarding both personnel and equipment.

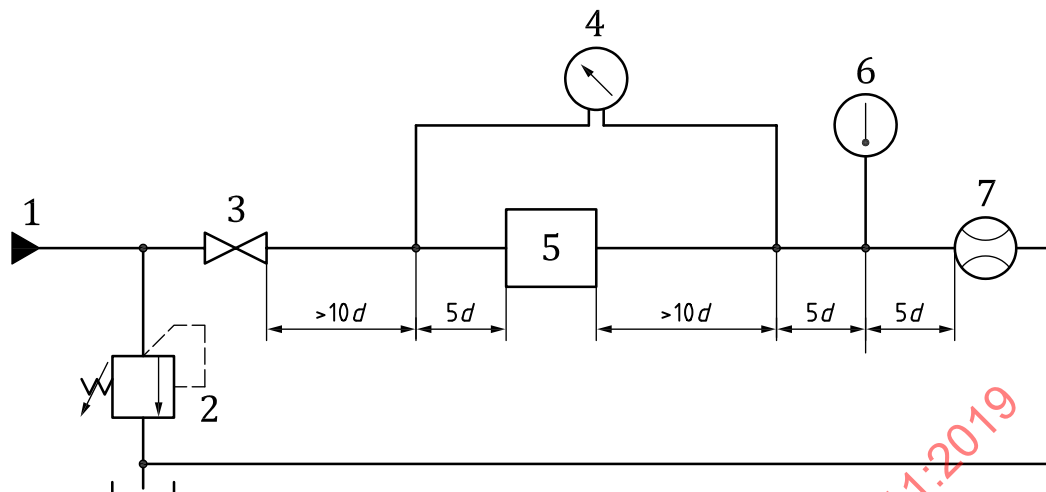**Key**

- 1 controllable flow supply, at controlled fluid temperature
- 2 relief valve (circuit protection)
- 3 stop valve (normally fully open)
- 4 differential pressure measuring device
- 5 test valve
- 6 temperature measuring device
- 7 flow meter

Figure 1 — Test circuit diagram

5.2.2 On subplate-mounted valves and sandwich-mounted valves, measurements should be carried out using standard pressure-tapping plates (intermediate plates) as shown in [Figure 2](#). In this case, the requirements given in [5.2.5](#) to [5.2.8](#) and [5.3](#) do not apply.

Dimension *A* shall be the maximum port size specified in ISO 4401, ISO 5781, ISO 6263, ISO 6264 or ISO 10372 for the valve being tested.

Dimension *B* shall be appropriate for the selected interface O-ring.

The threaded port size shall be appropriate for the flow rating of the valve.

Only one port is shown, which would be typical for P, T, A and B ports.

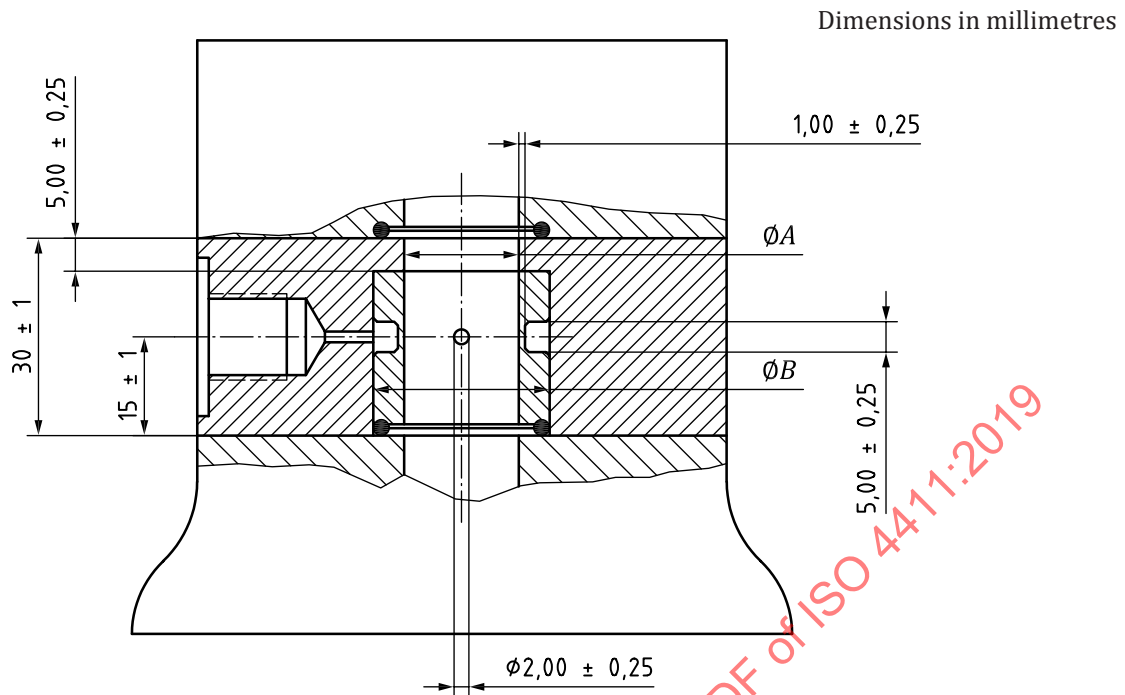


Figure 2 — Standard pressure-tapping plate for subplate-mounted valves

- 5.2.3** A fluid supply with controllable flow rate shall be used.
- 5.2.4** A relief valve shall be installed to protect the circuit from excessive pressure.
- 5.2.5** To establish a steady flow pattern at the upstream tapping, a visibly straight, uniform-bore tube length of at least $10d$ shall be used.
- 5.2.6** A visibly straight, uniform-bore tube length of at least $5d$ shall be used between the upstream pressure tapping and the valve.
- 5.2.7** To ensure adequate pressure recovery, a visibly straight, uniform-bore tube length of at least $10d$ shall be used between the test valve and the downstream pressure tapping.
- 5.2.8** A visibly straight, uniform-bore tube length of at least $5d$ shall be used between the downstream pressure tapping and the temperature measuring point.
- 5.2.9** A flow meter shall be installed to measure the flow rate at a point at least $5d$ downstream of the tube length described in 5.2.8. Turbines or thermal meters that do not contain flow straighteners should be installed at least $10d$ downstream.
- 5.2.10** Tubes and connectors consistent with the port size of the valve shall be used.

5.3 Pressure-tapping points

- 5.3.1** Static pressure measuring connections shall be used in accordance with ISO 9110-2.
- 5.3.2** For all classes of measurement accuracy, single pressure tapping shall be used.
- 5.3.3** Tapping shall not be installed on the lowest point of the tube.

6 Test procedures

6.1 Measurement accuracy

The test shall be carried out to one of three classes of measurement, A, B or C, as defined in ISO 9110-1. The measurement class shall be as agreed between the parties concerned. Permissible systematic errors for the measurement classes shall be as shown in [Table 2](#).

Table 2 — Permissible systematic errors of measuring instruments as determined during calibration

Parameter of measuring instrument	Permissible systematic errors for classes of measurement accuracy		
	A	B	C
Flow rate, q , expressed in percent	$\pm 1,0$	$\pm 2,0$	$\pm 3,0$
Differential pressure, Δp , expressed in percent	$\pm 1,0$	$\pm 3,0$	$\pm 5,0$
Temperature, expressed in kelvins	$\pm 0,5$	$\pm 1,0$	$\pm 2,0$

6.2 Test fluid

6.2.1 A test fluid approved by the manufacturer of the valve shall be used when carrying out the tests. A description of the fluid shall be recorded, and its mass density, ρ , and kinematic viscosity, ν , for the range of temperature used in the test shall be stated.

6.2.2 The fluid cleanliness level shall be maintained within the limits recommended by the valve manufacturer.

6.2.3 For class A or B measurement accuracy, the mass density, ρ , and the kinematic viscosity, ν , from fluid samples taken from the test installation shall be measured immediately before the test.

6.2.4 For class C measurement accuracy, it is permissible to use density and viscosity data obtained from the fluid supplier.

6.3 Temperatures

6.3.1 The fluid temperature shall be controlled during the test within the limits specified in [Table 3](#).

Table 3 — Permissible variation in indicated fluid temperature

Class of measurement accuracy	A	B	C
Variation in temperature indication, expressed in kelvins	$\pm 1,0$	$\pm 2,0$	$\pm 4,0$

6.3.2 The test shall be carried out within the range of fluid temperatures recommended by the valve manufacturer for the intended application of the valve.

6.4 Steady-state conditions

6.4.1 All readings shall only be recorded after steady-state conditions have been reached.

6.4.2 When steady-state conditions are reached for a specific test condition, only one set of readings of individual quantities shall be taken over concurrent common time periods. Each reading shall be recorded as the mean value of each quantity being measured.

6.5 Procedure

6.5.1 Install the test valve in the test circuit using the upstream and downstream ports in the valve or in the tapping plate as required.

6.5.2 Set the valve control for the flow path (or flow rate) required, if applicable.

6.5.3 The number of sets of readings to be taken and their distribution over the range shall be selected to give a representative indication of the performance of the valve over the full range of flow selected for the test.

6.5.4 For each flow selected in [6.5.3](#), measure the upstream pressure and the downstream pressure. If the test valve is a subplate-mounted type, skip [6.5.5](#) and [6.5.6](#).

6.5.5 If the test valve is a line-mounted type, remove it from the test circuit and connect the lines as specified in [6.5.1](#) to complete the test circuit without the test valve. This step is not necessary when a test circuit in accordance with [5.2.2](#) is used.

6.5.6 Repeat the pressure measurements of [6.5.4](#).

6.6 Pressure differential calculation

6.6.1 Where appropriate, correct each pressure reading for pressure head effects in accordance with ISO 9110-2.

6.6.2 Calculate the measured pressure differential for each reading in [6.5.4](#) by subtracting the downstream pressure from the upstream pressure. If the test valve is a subplate-mounted type, skip [6.6.3](#) and [6.6.4](#).

6.6.3 If the test valve is a line-mounted type, calculate the tare pressure differential for each reading in [6.5.6](#) by subtracting the downstream pressure from the upstream pressure. Use a value of zero when a test circuit in accordance with [5.2.2](#) is used.

6.6.4 If the test valve is a line-mounted type, calculate the pressure differential, Δp , for each reading by subtracting the tare pressure differential obtained in [6.6.3](#) from the measured pressure differential obtained in [6.6.2](#).

6.7 Presentation of the test results


6.7.1 General

All test measurements and the results of calculations therefrom shall be tabulated by the testing agency and preferably also presented graphically as described in [6.7.2](#).

6.7.2 Presentation

The test results shall be presented dimensionally as a graph of pressure differential, Δp , against the flow rate, q . See [Annex A](#) for practical units. The kinematic viscosity and mass density at the controlled fluid temperature shall also be stated. An example is shown in [Figure 3](#).

For pilot check-valve cartridges, pilot relief valves or multifunctional valves with external drains, it is important to ensure that the characteristics are system independent and generally valid.

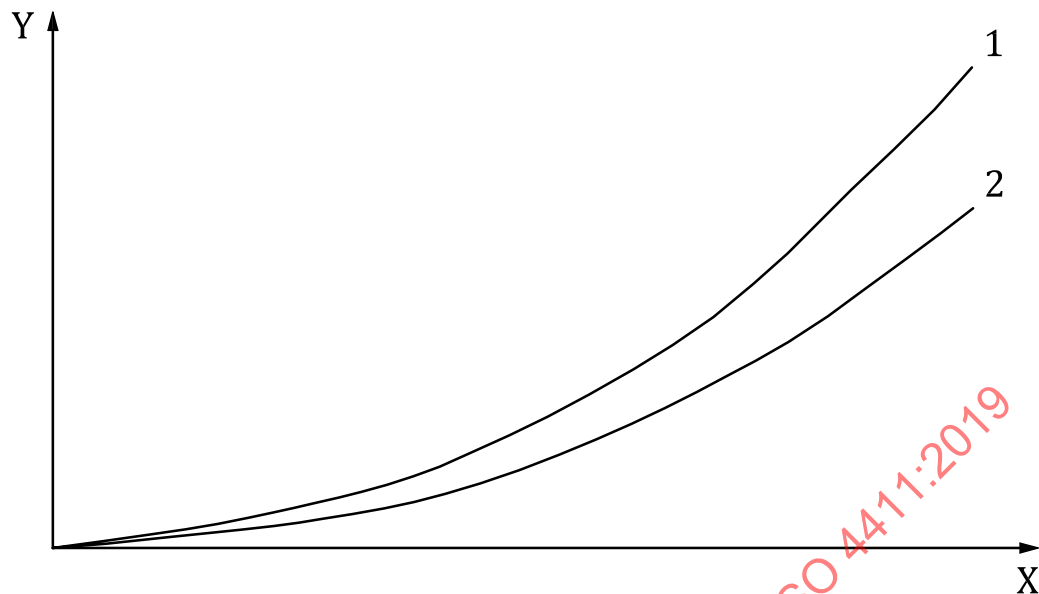

Valve manufacturer:

Valve type:

Valve model:

Test fluid:

Fluid kinematic viscosity:

Fluid mass density:

Fluid temperature:

Measurement class:

Valve state:

Key

X flow rate, q

Y differential pressure, Δp

1 flow path from B working port to T port

2 flow path from P port to A working port

Figure 3 — Example of the presentation of test results

7 Identification statement (Reference to this document)

It is strongly recommended to manufacturers who have chosen to conform to this document that the following statement be used in test reports, catalogues and sales literature:

“Test for the determination of pressure differential/flow characteristics of hydraulic valves conforms to ISO 4411:2019, *Hydraulic fluid power — Valves — Determination of differential pressure/flow rate characteristics.*”

Annex A (informative)

Use of practical units

The results of tests in either tabular or graphical form may be presented using practical units as given in [Table A.1](#).

Table A.1 — Practical units

Quantity	Symbol	Practical unit
Nominal diameter of valve	D	mm
Flow rate	q	l/min
Pressure differential	Δp	kPa (bar)
Tube length	l	m
Inside diameter of tube	d	mm
Temperature	θ	°C
Kinematic viscosity	ν	mm ² /s (cSt)
Mass density	ρ	kg/m ³