

NFPA 18

Wetting Agents

1990 Edition



NOTICE

All questions or other communications relating to this document should be sent only to NFPA Headquarters, addressed to the attention of the Committee responsible for the document.

For information on the procedures for requesting Technical Committees to issue Formal Interpretations, proposing Tentative Interim Amendments, proposing amendments for Committee consideration, and appeals on matters relating to the content of the document, write to the Secretary, Standards Council, National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

A statement, written or oral, that is not processed in accordance with Section 16 of the Regulations Governing Committee Projects shall not be considered the official position of NFPA or any of its Committees and shall not be considered to be, nor be relied upon as, a Formal Interpretation.

Users of this document should consult applicable Federal, State and local laws and regulations. NFPA does not, by the publication of this document, intend to urge action which is not in compliance with applicable laws and this document may not be construed as doing so.

Policy Adopted by NFPA Board of Directors on December 3, 1982

The Board of Directors reaffirms that the National Fire Protection Association recognizes that the toxicity of the products of combustion is an important factor in the loss of life from fire. NFPA has dealt with that subject in its technical committee documents for many years.

There is a concern that the growing use of synthetic materials may produce more or additional toxic products of combustion in a fire environment. The Board has, therefore, asked all NFPA technical committees to review the documents for which they are responsible to be sure that the documents respond to this current concern. To assist the committees in meeting this request, the Board has appointed an advisory committee to provide specific guidance to the technical committees on questions relating to assessing the hazards of the products of combustion.

Licensing Provision — This document is copyrighted by the National Fire Protection Association (NFPA).

1. Adoption by Reference — Public authorities and others are urged to reference this document in laws, ordinances, regulations, administrative orders or similar instruments. Any deletions, additions and changes desired by the adopting authority must be noted separately. Those using this method are requested to notify the NFPA (Attention: Secretary, Standards Council) in writing of such use. The term "adoption by reference" means the citing of title and publishing information only.

2. Adoption by Transcription — **A.** Public authorities with lawmaking or rule-making powers only, upon written notice to the NFPA (Attention: Secretary, Standards Council), will be granted a royalty-free license to print and republish this document in whole or in part, with changes and additions, if any, noted separately, in laws, ordinances, regulations, administrative orders or similar instruments having the force of law, provided that: (1) due notice of NFPA's copyright is contained in each law and in each copy thereof; and, (2) that such printing and republication is limited to numbers sufficient to satisfy the jurisdiction's lawmaking or rulemaking process. **B.** Once this NFPA Code or Standard has been adopted into law, all printings of this document by public authorities with lawmaking or rulemaking powers or any other persons desiring to reproduce this document or its contents as adopted by the jurisdiction in whole or in part, in any form, upon written request to NFPA (Attention: Secretary, Standards Council), will be granted a nonexclusive license to print, republish, and vend this document in whole or in part, with changes and additions, if any, noted separately provided that due notice of NFPA's copyright is contained in each copy. Such license shall be granted only upon agreement to pay NFPA a royalty. This royalty is required to provide funds for the research and development necessary to continue the work of NFPA and its volunteers in continually updating and revising NFPA standards. Under certain circumstances, public authorities with lawmaking or rulemaking powers may apply for and may receive a special royalty when the public interest will be served thereby.

3. Scope of License Grant — The terms and conditions set forth above do not extend to the index to this document.

(For further explanation, see the Policy Concerning the Adoption, Printing and Publication of NFPA Documents which is available upon request from the NFPA.)

Statement on NFPA Procedures

This material has been developed under the published procedures of the National Fire Protection Association, which are designed to assure the appointment of technically competent Committees having balanced representation. While these procedures assure the highest degree of care, neither the National Fire Protection Association, its members, nor those participating in its activities accepts any liability resulting from compliance or noncompliance with the provisions given herein, for any restrictions imposed on materials or processes, or for the completeness of the text.

NFPA has no power or authority to police or enforce compliance with the contents of this document and any certification of products stating compliance with requirements of this document is made at the peril of the certifier.

Copyright © 1990 NFPA, All Rights Reserved

NFPA 18
Standard on
Wetting Agents
1990 Edition

This edition of NFPA 18, *Standard on Wetting Agents*, was prepared by the Technical Committee on Foam, and acted on by the National Fire Protection Association, Inc. at its Annual Meeting held May 21-24, 1990 in San Antonio, TX. It was issued by the Standards Council on July 20, 1990, with an effective date of August 17, 1990, and supersedes all previous editions.

The 1990 edition of this document has been approved by the American National Standards Institute.

Origin and Development of NFPA 18

This standard was originally sponsored by the NFPA General Committee on Special Extinguishing Methods and prepared by the NFPA Committee on Wetting Agents. It was initiated in 1949, tentatively adopted in 1949, and officially adopted first in 1951. Extensive revisions, most of which were concerned with the use of wetting agent foam, were adopted in 1955. Subsequently (1959) responsibility for this standard was transferred to the Committee on Foam, and the standard was amended in 1972 and 1979.

The 1986 edition of the standard was a reconfirmation of the 1979 edition. This edition is also a reconfirmation of the 1979 edition.

Technical Committee on Foam

Richard F. Murphy, *Chairman*
Exxon Research & Engr. Co.
(Rep. API)

Laurence D. Watrous, *Secretary*
Professional Loss Control Inc.

Joan M. Becker, 3M
Francis X. Bender, Safety Engineering Consultants
William M. Carey, Underwriters Laboratories Inc.
Thomas M. Child Jr., Kemper Group
H. Ray Coleman, San Francisco, CA
Arthur R. Dooley Jr., Dooley Tackaberry, Inc.
Rep. NAFED
Victor G. Geihlsler, Industrial Risk Insurers
George R. Herzog, Ansul Fire Protection
Rep. FEMA
Alan L. Holder, LA Power & Light Co.
Rep. EEI
John A. Krembs, M&M Protection Consultants
Norman R. Lockwood, Washington Crossing, PA
Giorgio Marini, I 16166 Genova, Italy
D. N. Meldrum, Malvern, PA
Carlos M. Mendes, Levitt-Safety Ltd.
Rep. FEMI of Canada

Robert C. Merritt, Factory Mutual Research Corp.
Charles Pappas, Grinnell Fire Prot System Co. Inc.
Rep. NFSA
John M. Poulson, Union Carbide Corp.
Fay Purvis, National Foam System, Inc.
L. E. Rivkind, Mearl Corp.
Christopher L. Vollman, Rolf Jensen & Associates Inc.
Klaus Wahle, US Coast Guard
B. J. Walker, The FPE Group
William P. Wheeler, Mobil Research & Development Corp.
Rep. NPRA
H. E. Wolff, Valley Forge, PA
F. Derek Wood, Angus Fire Armour Corp.

Alternates

Wayne E. Ault, Rolf Jensen & Associates Inc.
(Alternate to C. L. Vollman)
William Biscontinini, Walter Kidde
(Alternate to G. R. Herzog)
Marco Bosoni, Snamprogetti
(Alternate to G. Marini)
Frederick L. Deacon, Kemper Group - Engineering Office
Rep. AAI
(Alternate to T. M. Child)
W. G. Garrison, M&M Protection Consultants
(Alternate to J. A. Krembs)

Richard A. Gross, Industrial Risk Insurers
(Alternate to V. G. Geihlsler)
Dale W. Kent, 3M
(Alternate to J. M. Becker)
Emil W. Misichko, Underwriters Laboratories Inc.
(Alternate to W. M. Carey)
Francisco N. Nazario, Exxon Research & Engr. Co.
(Alternate to R. F. Murphy)

Nonvoting

Donald M. Johnson, San Bruno, CA
Rep. T/C Fla & Combust Liquids

Mark T. Conroy, NFPA Staff Liaison

This list represents the membership at the time the Committee was balloted on the text of this edition. Since that time, changes in the membership may have occurred.

NOTE: Membership on a Committee shall not in and of itself constitute an endorsement of the Association or any document developed by the Committee on which the member serves.

Contents

Foreword	18- 5
Chapter 1 General Information	18- 5
1-1 Introduction.	18- 5
1-2 Definitions.	18- 5
1-3 Uses.	18- 6
1-4 Limitations.	18- 7
1-5 Basic Requirements.	18- 7
1-6 Units	18- 7
Chapter 2 Wetting Agent Specifications and Tests	18- 7
2-1 General.	18- 7
2-2 Toxicity	18- 8
Chapter 3 Requirements for Supply of Wetting Agent	18- 8
3-1 System Requirements.	18- 8
3-2 Fire Department Supply Requirements.	18- 8
3-3 Fixed Systems.	18- 8
Chapter 4 Service Regulations	18- 9
4-1 Inspection.	18- 9
4-2 Testing.	18- 9
4-3 Maintenance.	18- 9
Chapter 5 Instructions for Use	18- 9
5-1 Precautions	18- 9
5-2 Applications.	18- 9
5-3 Storage	18- 9
Chapter 6 Referenced Publications	18- 9
Appendix A	18- 9
Appendix B Referenced Publications	18-11
Index	18-11

NFPA 18
Standard on
Wetting Agents

1990 Edition

NOTICE: An asterisk (*) following the number or letter designating a paragraph indicates explanatory material on that paragraph in Appendix A.

Information on referenced publications can be found in Chapter 6 and Appendix B.

Foreword

Water has been accepted for many years as the most practical fire fighting agent because of its almost universal availability, its great heat absorption capacity, and because it is a liquid.

Experience, as well as tests, have indicated that the addition of a proper wetting agent to water will, when properly applied, increase the extinguishing efficiency of that water with respect to quantity used as well as time saved. The value of such a factor may well become of considerable importance, especially in rural areas where the amount of water available for fire fighting is often inadequate. This is because the addition of a proper wetting agent to the charge in a booster tank will increase the extinguishing efficiency of the water. In other cases, such as forest fires, the increased efficiency becomes an important consideration since most of the water is transported manually in portable equipment.

Certain types of fires, such as those in baled cotton, stacked hay, some rubber compounds, and some flammable liquids, that do not ordinarily respond to treatment with water may be extinguished when a proper wetting agent is used. This property may be attributed to an increase in the penetrating, spreading, and emulsifying powers of water due to such factors as lowering the surface tension. This decreased surface tension can be described as a disruption of the forces holding the surface film of water together, thereby permitting it to flow and spread uniformly over solid surfaces. As a result, the treated water acquires the ability to penetrate into small openings and recesses that water would flow over by the simple bridging action of the surface film. It is to be noted that such solutions exhibit not only penetrating and spreading qualities, but also exhibit increased absorptive speed and superior adhesion to solid surfaces.

Wetting agents having foaming characteristics as referred to in this standard, when mixed with water and air, produce a foam that retains the wetting and penetrating characteristics of the wetting agent and provides an efficient smothering action for the extinguishment of both Class A and Class B combustibles or provides a fluid insulation for protection against fire exposure. The foam produced in this manner has the additional advantage of breakdown at approximately 175°F (79.4°C) and returns to its original liquid state retaining the penetrating and wetting qualities. The breakdown of this foam when applied on Class A combustibles automatically provides an efficient and adequate application rate for efficient extinguishment.

There are numerous chemicals that fulfill the primary function of a wetting agent, which is to lower the surface tension of water. However, very few of these chemicals are suited to fire control work because application to this purpose is complicated by such considerations as toxicity, corrosive action on equipment, and stability in naturally occurring waters. In view of this fact, therefore, these standards set forth certain basic requirements and limitations for the use of a wetting agent as an aid for fire extinguishment. The requirements are intended to ensure that the addition of a wetting agent to any natural water shall not affect that water adversely with respect to fire fighting properties, nor render it harmful to personnel, property, or equipment. It is further intended to establish standards for the evaluation of wetting agents as fire extinguishing mediums.

Chapter 1 General Information

1-1 Introduction.

1-1.1 Scope. This standard is limited to qualification tests, methods of evaluation, general rules for application, and limitations for use of wetting agents as related to fire control and extinguishment.

1-1.1.1 The method whereby the wetting agent is added to water is not herein specifically set forth. The solution may be premixed in tanks or may result from bringing the wetting agent into contact with water by any suitable proportioning device, providing, however, said device shall be approved in accordance with applicable standards.

1-1.2 Purpose. This standard gives, in general, the requirements for the performance and use of wetting agents as related to fire control and extinguishment and is prepared for the guidance of the fire services, authorities having jurisdiction, and others concerned with judging the acceptability and use of any chemical offered for such purpose.

1-2 Definitions.

Approved. Acceptable to the "authority having jurisdiction."

NOTE: The National Fire Protection Association does not approve, inspect or certify any installations, procedures, equipment, or materials nor does it approve or evaluate testing laboratories. In determining the acceptability of installations or procedures, equipment or materials, the authority having jurisdiction may base acceptance on compliance with NFPA or other appropriate standards. In the absence of such standards, said authority may require evidence of proper installation, procedure or use. The authority having jurisdiction may also refer to the listings or labeling practices of an organization concerned with product evaluations which is in a position to determine compliance with appropriate standards for the current production of listed items.

Authority Having Jurisdiction. The "authority having jurisdiction" is the organization, office or individual responsible for "approving" equipment, an installation or a procedure.

NOTE: The phrase "authority having jurisdiction" is used in NFPA documents in a broad manner since jurisdictions and "approval" agencies vary as do their responsibilities. Where

public safety is primary, the "authority having jurisdiction" may be a federal, state, local or other regional department or individual such as a fire chief, fire marshal, chief of a fire prevention bureau, labor department, health department, building official, electrical inspector, or others having statutory authority. For insurance purposes, an insurance inspection department, rating bureau, or other insurance company representative may be the "authority having jurisdiction." In many circumstances the property owner or his designated agent assumes the role of the "authority having jurisdiction"; at government installations, the commanding officer or departmental official may be the "authority having jurisdiction."

Class A Fires. Fires in ordinary combustible materials, such as wood, cloth, paper, rubber, and many plastics.

Class B Fires. Fires in flammable or combustible liquids and in gases or greases.

Class C Fires. Fires that involve energized electrical equipment. (When electrical equipment is de-energized, the fire may continue to burn as a Class A, B, or D fire.)

Class D Fires. Fires in combustible metals, such as magnesium, titanium, zirconium, sodium, and potassium.

Combustible Liquid. A liquid having a flash point at or above 100°F (37.8°C).

Combustible Liquids shall be subdivided as follows:

Class II liquids shall include those having flash points at or above 100°F (37.8°C) and below 140°F (60°C).

Class IIIA liquids shall include those having flash points at or above 140°F (60°C) and below 200°F (93.4°C).

Class IIIB liquids shall include those having flash points at or above 200°F (93.4°C).

Flammable Liquid. A liquid having a flash point below 100°F (37.8°C) and having a vapor pressure not exceeding 40 lbs psi (276kPa) absolute at 100°F (37.8°C) and shall be known as a Class I liquid.

Class I liquids shall be subdivided as follows:

Class IA shall include those having flash points below 73°F (22.8°C) and having a boiling point below 100°F (37.8°C).

Class IB shall include those having flash points below 73°F (22.8°C) and having a boiling point at or above 100°F (37.8°C).

Class IC shall include those having flash points at or above 73°F (22.8°C) and below 100°F (37.8°C).

Labeled. Equipment or materials to which has been attached a label, symbol or other identifying mark of an organization acceptable to the "authority having jurisdiction" and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.

Listed. Equipment or materials included in a list published by an organization acceptable to the "authority having jurisdiction" and concerned with product evaluation, that maintains periodic inspection of production of listed equip-

ment or materials and whose listing states either that the equipment or material meets appropriate standards or has been tested and found suitable for use in a specified manner.

NOTE: The means for identifying listed equipment may vary for each organization concerned with product evaluation, some of which do not recognize equipment as listed unless it is also labeled. The "authority having jurisdiction" should utilize the system employed by the listing organization to identify a listed product.

Shall. Indicates a mandatory requirement.

Should. Indicates a recommendation or that which is advised but not required.

Wet Water.* Water to which a compatible wetting agent has been added.

Wet Water Foam. An admixture of wet water with air to form a cellular structure foam that breaks down rapidly into its original liquid state at temperatures below the boiling point of water, at a rate directly related to the heat to which it is exposed, in order to cool the combustible on which it is applied.

Wetting Agent. A chemical compound which, when added to water in proper quantities, materially reduces its surface tension, increases its penetrating and spreading abilities, and may also provide emulsification and foaming characteristics.

1-3 Uses.

1-3.1 In general, this standard is intended to signify that a wetting agent that successfully meets the requirements herein set forth shall not be limited in use or application except as herein specified.

1-3.2 The addition of proper wetting agents to water will increase its penetrating and emulsifying abilities and may provide foaming characteristics as to extend the efficiency of water for the protection against fire exposure and the extinguishment of Class A and Class B fires in ordinary combustibles and combustible liquids that are insoluble in water and ordinarily stored at atmospheric temperatures and pressures.

1-3.3 In general, wetting agents can be effectively applied and used with all types of standard fire protection equipment where water is normally used. The degree of efficiency obtained will depend on utilizing the most efficient application methods, techniques, and devices for the hazard involved. (See Section 1-4, *Limitations*.)

1-3.4* When water containing *listed* wetting agents is applied to a fire, some of the wetting agent may be expected to remain after extinguishment. This residual wetting agent may be effective in reducing the surface tension of water that may subsequently be applied.

1-3.5 The authority having jurisdiction shall be consulted in all cases where the use of wet water is considered for application through fixed equipment, such as water spray, sprinkler, or foam systems. The volume of extinguishing medium

required will vary with each type of system and hazard. If applied as a liquid solution, the standard applicable to water systems shall apply.

1-3.6 Effective exposure protection can be accomplished by the application of wet water foam directly to the exposed structure or equipment to reduce the heat transferred from the exposure fire. This protection is afforded whether applied from portable or fixed equipment. Due to the cellular structure and reflective characteristics of wet water foam, the water requirements can be appreciably reduced.

1-3.6.1 The addition of wetting agents to water will increase the efficiency due to the spreading characteristics of the wetting agent, thus affording greater protection than water.

1-4 Limitations.

1-4.1 The addition of wetting agents to water, which changes its physical characteristics, creates certain limitations for use that shall be recognized.

1-4.2 Class A Fires. Wet water has the same limitations as water with respect to extinguishing fires involving chemicals that react with water to create new hazards.

1-4.3 Class B Fires. The effective use of wet water for the extinguishment of fires involving Class B flammable or combustible liquids as defined in Section 1-2 is limited to those materials not soluble in water, such as petroleum products. In water soluble materials of the alcohol type, some control may be realized, but extinguishment is questionable.

1-4.4* Class C Fires. Wet water solutions can conduct electricity and have limitations similar to water in fighting fires involving energized electrical equipment so far as safety to fire fighting personnel is concerned. Application as a straight stream is not recommended. Spray or fog application can be employed with usual caution.

1-4.5 Wet water shall not be used on Class D fires.

1-4.6 Use of Wetting Agents with Other Than Water. Admixing of wetting agents with other wetting agents or with mechanical or chemical foam liquids is not recommended and shall be avoided. The mixing of these agents may have adverse results and thus render them ineffective for fire extinguishment.

1-4.7 The use of wetting agents in concentrations greater than those specified by the manufacturer and/or recommended by the testing laboratory shall be avoided. High concentrations may cause adverse effects.

1-4.8* Corrosion. The corrosive effects of wetting agents shall be specified by the manufacturer and included in the listing report of the testing laboratory.

1-4.8.1* The corrosive and/or deterioration effects upon materials and metals recommended by the manufacturer as being compatible with the wetting agent shall be determined by the listing laboratory and results contained in their listing report and in the manufacturer's directions for use.

1-4.8.2 Solutions containing wetting agents will remove galvanizing or similar coatings and therefore shall not be used where they may contact such coatings.

1-4.8.3 Concentrated or dilute solutions of wetting agents may cause mild pit-type corrosion of some metal surfaces at the liquid level and in the vapor space. Therefore, storage of wetting agents in any concentration over long periods of time shall be avoided, unless the container is fabricated of corrosive-resistant materials or suitable protective coatings are provided.

1-4.9 Toxicity. Reasonable care shall be exercised to avoid concentrated solutions in contact with the skin. Due to the cleansing properties similar to strong soaps, continued contact may cause mild dermatitis.

NOTE: In general, listed wetting agents are nontoxic.

1-4.9.1 Contamination of foods and eating of contaminated food shall be avoided.

1-4.10 The use of listed wetting agents in portable extinguishers is limited to special formulations as may be specified by the manufacturer and determined by the listing laboratories.

1-5 Basic Requirements.

1-5.1 Wetting agents for fire fighting shall be listed by a testing laboratory and shall be approved by the authority having jurisdiction.

1-5.2 Special equipment, such as proportioners, shall be listed by a testing laboratory and shall be approved by the authority having jurisdiction.

1-6 Units. Metric units of measurement in this standard are in accordance with the modernized metric system known as the International System of Units (SI).¹

1-6.1 If a value for measurement as given in this standard is followed by an equivalent value in other units, the first stated is to be regarded as the requirement. A given equivalent value may be approximate.

1-6.2 The conversion procedure for the SI units has been to multiply the quantity by the conversion factor and then round the result to the appropriate number of significant digits.

Chapter 2 Wetting Agent Specifications and Tests

2-1 General.

2-1.1 Evaluation Tests. The concentration for use of the active ingredient or ingredients of a wetting agent shall be specified by each manufacturer, and acceptance tests and approval shall be based on such specifications.

¹ For additional conversions and information see ASTM E380, Standard for Metric Practice.

2-1.1.1* Wetting agents when added to water in concentrations specified for use shall reduce the surface tension to less than 33 dynes/cm².

2-1.1.2 The addition of the wetting agent, in concentrations specified for use by the manufacturer, shall not lower the boiling point or raise the freezing point temperatures of water.

2-1.1.3 A wetting agent to be used for fire extinguishing purposes shall be readily soluble in water and easily and uniformly mixed.

(a) *Solubility.* Throughout the listed storage and use temperature range, the wetting agent shall form a true solution with water, which is stable up to the maximum concentration recommended for use by the manufacturer.

(b)* *Separation Temperature.* Aqueous solutions of the wetting agent in concentrations recommended for use by the manufacturer shall not separate at any temperature between 32°F and 120°F (0°C and 48.9°C). Any increase in haziness, cloudiness, or precipitation occurring during the course of the test indicates a separation.

(c)* *Separation on Standing.* The wetting agent, in concentrations specified for use by the manufacturer, shall display no tendency to "layer out" or otherwise separate, on standing for 30 days at the minimum and maximum storage and use temperatures and at 60°F (15.6°C). The formation of two or more distinct layers or precipitation occurring during the course of the test shall be considered as an indication of separation.

(d)* *Action after Freezing.* Aqueous solutions of the wetting agent in concentrations recommended for use by the manufacturer, after being frozen for 1 hour and then warmed to 60°F (15.6°C), shall return to normal condition after reasonable agitation.

2-1.1.4 Listings shall indicate the use for which the material is effective, as on Class A or Class B materials.

2-1.1.5* pH. The pH of aqueous solutions of the wetting agents in concentrations recommended for use by the manufacturer shall be between 7 and 12 at 60°F (15.6°C).

2-1.1.6 Nozzle Discharge. No appreciable reduction in range, pattern, or discharge rate shall be permitted as compared to water discharge at the same temperature and pressure.

2-1.1.7 Viscosity. Viscosity determinations at 60°F (15.6°C) by any of the standard laboratory methods are satisfactory. The results shall be reported in terms of absolute viscosity (centipoise) for easy comparison with established data.

2-1.2* Fire Extinguishment Tests.

2-1.2.1* Class A Fires.

2-1.2.2 Class B Fires. Evaluation tests by a testing laboratory shall be followed for acceptance of a wetting agent for application to Class B fires.

2-1.3 Container Marking. The manufacturer shall include the following information on the container label:

(a) The manufacturer's name or trademark or some other distinctive symbol agreed upon with the testing laboratory to clearly identify the wetting agent as a listed chemical.

(b) Concentration for use with various types of combustibles.

(c) Surface tension of solutions of recommended concentration in distilled water.

(d) Viscosity at 60°F (15.6°C) of the concentrated wetting agent.

(e) Recommended storage conditions.

(f) Lot number and/or date of manufacture.

2-2 Toxicity. (See 1-4.9 and 1-4.9.1.)

Chapter 3 Requirements for Supply of Wetting Agent

3-1 System Requirements.

3-1.1 Equipment. Wetting agents that comply with the specifications herein set forth may be allowed for use with standard equipment provided said equipment is primarily designed to utilize water or foam as a medium of fire control and extinguishment in accordance with 1-3.3 and 1-3.5. Permissible use with new types of equipment shall be determined by the authority having jurisdiction.

3-2 Fire Department Supply Requirements.

3-2.1 The wetting agent may be premixed in a booster tank in such concentration as may be specified by the manufacturer. Where such premixing is considered undesirable, an amount of wetting agent determined to be sufficient for the water contained in the portable tanks on the apparatus shall be carried in a container that can readily be emptied into such tanks.

3-2.2 Where portable tanks are not a part of the apparatus, or where it is desired to carry the wetting agent separately for use either with water from portable tanks or with water from other sources of supply, the amount considered necessary shall be carried in a suitable tank connected to appropriate proportioning equipment on the apparatus. Where such equipment is used also to take suction from a hydrant supplied by potable water, extra care shall be exercised to prevent contamination of such potable water supplies with wetting agent.

3-2.3 Additional Supplies. Additional supplies of wetting agent will be needed to ensure continuity of operation, and they shall be carried on the apparatus. Further supplies shall be stocked in suitable storage facilities to recharge the apparatus.

3-3 Fixed Systems.

3-3.1 Existing standards covering all fixed systems shall be followed where the addition of a wetting agent to the system is contemplated. (See NFPA 13, *Standard for the Installation of Sprinkler Systems*; NFPA 14, *Standard for the Installation of Standpipe and Hose Systems*; and NFPA 15, *Standard for Water Spray Fixed Systems for Fire Protection*.) Such installations shall be

approved by the authority having jurisdiction with consideration being given primarily to limitations outlined in Section 1-4 and to:

(a) The possibility of increased water damage due to the high absorption ability of wet water.

(b) The possibility of increased floor loads due to the retention of large volumes of wet water.

Chapter 4 Service Regulations

4-1 Inspection.

4-1.1 Due to its greater penetrating power, wet water is capable of passing through small openings that would be impassable to water. For this reason it will often be found that old, but apparently sound, equipment will have a tendency to spring leaks when charged with wet water, especially at worn packing glands. For this reason all old packings shall be renewed when the switch is made to wet water, and regular inspections shall be held thereafter in order to minimize losses, as well as to ascertain that the equipment is in good operating condition.

4-1.2 Schedule. The inspection schedule shall be arranged by the authority having jurisdiction. Weekly inspections shall be made for the first month. After the first leaks have been detected and repaired only routine inspections will be necessary, and these may be arranged to suit other inspection or drill schedules.

4-1.3 Points of Inspection. All points that might conceivably be subject to leakage shall be carefully examined. These would include valve packings, retainers, bushings, threaded joints, screw unions, etc.

4-2 Testing.

4-2.1 The functional parts of a system in which wet water is being used shall be tested periodically in accordance with the standard applying to that system. In addition to this functional testing, which shall be a part of the regular drill program, samples of the wet water shall be tested periodically in accordance with the following schedule and test procedure.

4-2.2 Schedule. Pre-mixed solutions of the wetting agent shall be tested once every 30 days in accordance with the following test procedure, and this same test shall be applied immediately following the preparation of a new charge of wet water. In cases where the solution is never pre-mixed, but is to be made up at the fire scene, the concentrate shall be used to make up a small test sample. This sample shall then be subjected to the wetting test as detailed in Chapter 2. Failure to meet the test will be an indication that the wetting agent has deteriorated, in which case the authority having jurisdiction shall be notified, and steps taken to correct the situation by replacement of the wetting agent.

4-3 Maintenance.

4-3.1 General Rules. Rules and regulations as set forth in NFPA 13, *Standard for the Installation of Sprinkler Systems*; NFPA 14, *Standard for the Installation of Standpipe and Hose Systems*;

and NFPA 15, *Standard for Water Spray Fixed Systems for Fire Protection*, shall be observed in the maintenance of systems in which wet water is being used. Special care shall be taken to replace worn packings and to eliminate other potential sources of leakage.

Chapter 5 Instructions for Use

5-1 Precautions. (See Section 1-4, *Limitations*.)

5-2 Applications.

5-2.1 In general, recognized application techniques for water shall be followed where wetting agents are used. Primary consideration shall be given, however, to the characteristics of wet water in that a wetting agent is active only when it comes in contact with the combustible involved.

5-2.2 Wet water to be most efficiently utilized shall be applied directly to the surface of the combustible, since wetting agents do not increase the heat absorption capacity of water but may increase the heat absorption efficiency of such water due to its greater spreading and penetrating abilities.

5-3 Storage. Proper facilities for storing the concentrate and/or premix solutions in accordance with the recommendations of the manufacturer shall be provided. In general, no wetting agent shall be stored at a temperature below 32°F (0°C).

Chapter 6 Referenced Publications

6-1 The following documents or portions thereof are referenced within this standard and shall be considered part of the requirements of this document. The edition indicated for each reference is the current edition as of the date of the NFPA issuance of this document.

6-1.1 NFPA Publications. National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

NFPA 13-1989, *Standard for the Installation of Sprinkler Systems*

NFPA 14-1990, *Standard for the Installation of Standpipe and Hose Systems*

NFPA 15-1990, *Standard for Water-Spray Fixed Systems for Fire Protection*.

Appendix A

This Appendix is not a part of the requirements of this NFPA document, but is included for information purposes only.

A-1-2 Wet Water. The term "water" as used in the standard includes all potable supplies. However, water from other sources may be used provided tests indicate the satisfactory performance of the specific wetting agent under consideration.

A-1-3.4 Field observations indicate that in the use of wetting agents for fire extinguishment the water present is expended due to its conversion into steam which gives a cooling effect, whereas the wetting agent itself is not expended (except for runoff) up to an undetermined temperature which is much higher than the boiling point of water. It is also indicated that when sufficient (the quantity being undetermined as yet) nonexpendable wetting agent has been applied to a fire, it continues to be effective with the addition of water. Additional fire tests or field experience will be necessary to determine these indicated items.

A-1-4.4 Should wet water come in contact with electrical equipment, the wetting agent may remain behind after the water has dried off and may constitute a hazard when the equipment is put back in operation.

Wet water, due to its penetrating characteristics, may have harmful effects on electrical equipment involving use of fabric-covered wire, such as motors, transformers, etc. Electrical equipment of this nature should be thoroughly flushed and cleaned after exposure to wet water solutions and before placing in service again. Use on fires involving grouped electrical cables is not recommended.

A-1-4.8 Corrosion of Metals. Samples of mild steel (also brass, bronze, and copper — see the last paragraph of this section) are to be tested for corrosion in prepared solutions of the wetting agent in all concentrations specified for use by the manufacturer.

Generally, listed wetting agents have a definite cleaning action and will remove from metal surfaces grease, oil, mill scale, protective coatings, etc., which normally protect metal from the corrosive attack of water, in which case accelerated water corrosion may be expected.

For continuous storage the use of materials such as cast iron, aluminum, zinc, galvanized iron, lead or lead-coated iron, die cast alloys (such as white metal, zinc, etc.), or “air-dried” types of coatings (which may include plastics, oil paint, lacquers, and asphalt) should be avoided unless investigated and listed for such use. This is because wetting agents, although noncorrosive, exhibit a tendency to accelerate corrosion due to the cleaning and penetrating action and will penetrate and loosen unbonded coatings that are not of the “baked on” type.

Specimens approximately 1 in. wide by 5 in. long (25 mm by 125 mm) are cut from $\frac{1}{16}$ in. (1.6 mm) thick hot rolled sheet steel. The mill scale is removed by pickling in warm hydrochloric acid containing Rodine inhibitor, and the specimens are then cleaned by scrubbing with soap and water, rinsed in acetone, dried in a desiccator, and weighed.

The samples are then suspended in wide-mouth, 1-qt (0.95-L) bottles containing 800 cc of the solution to be tested. The specimens are hung from glass thread in such a manner that approximately 1 in. (25 mm) of metal extends above the surface of the liquid. For comparison, metal samples are similarly exposed to distilled water. The test containers are then stored at room temperature for one month. At the end of this time, they are carefully removed from the containers and cleaned by immersion in hot 20 percent sodium hydroxide solution containing zinc dust. The alkali is removed by rinsing in hot water and the specimens further cleaned by scrubbing with soap and water. They are then rinsed in acetone, dried in the desiccator, and reweighed. The corrosion rates are calculated as inches per year from the weight loss

during exposure using the formula:

$$\text{Inch per year} = \frac{43.9 \times \text{weight loss (g)}}{12 \times \text{density of metal (g/cc)} \times \text{area (in.}^2\text{)} \times \text{hours exposed}}$$

A minimum of two tests per solution to be evaluated are to be conducted and the average corrosion rate used.

A corrosion rate substantially greater than that of the distilled water control should be cause for rejection.

Examine the specimens for signs of pitting. The presence of any pits deeper than $\frac{1}{5}$ the thickness of the specimen should be cause for rejection.

This procedure is also used for other metals including steel, with the exception of the pickling and sodium hydroxide treatment.

A-1-4.8.1 Action on Fire Hose. This test is to consist essentially of a visual determination of the effects of wet water on nonmetallic materials used in the manufacture of fire fighting equipment and should include samples of fire hose, natural rubber, synthetic rubber, asphalt, etc.

Cut 1-in. (25-mm) (approximately) squares of the materials; weigh and place them separately in 100 cc of the prepared solution. Similar control samples are to be placed in distilled water. Allow to stand for at least 30 days, and at the end of this time examine the samples visually for signs of swelling, softening, or disintegration. Dry the samples by wiping with a soft cloth and weigh.

The samples should exhibit no more attack than the control samples in distilled water, nor any greater increase in weight.

Fifty samples of the approved natural or synthetic thread of the types used in fire hose are cut in 12-in. (305-mm) lengths. For a period of 24 hours, 25 of each of these are immersed in distilled water and 25 of each in the prepared solution of the wetting agent. Remove the samples after 24 hours, dry them between towels and condition for 48 hours at 100°F (37.8°C). Tensile strength tests are then conducted according to ASTM D2256, Test for Breaking Load (Strength) and Elongation of Yarn by the Single-Strand Method.

The average strength of the 25 samples of yarn immersed in the wet water shall not be less than 90 percent of the 25 samples of the same yarn from the distilled water.

A-2-1.1.1 Surface Tension. Solutions in such concentrations as are specified for use by the manufacturer are to be used, and an average of three determinations should be the reported value. Measurements are carried out on any standard instrument, such as the du Nuoy Tensiometer, and the proper correction factor applied to the determined values.

A-2-1.1.3(b) and (c) Both concentrated and dilute solutions should be tested. Place a 100 cc sample in a clean breaker or flask and raise the temperature to 120°F (48.9°C). Observe any evidence of precipitation or separation. Then gradually lower the temperature to 32°F (0°C), observing any evidence of separation over the entire range.

A-2-1.1.3(d) Action after Freezing. Place 100 cc of the prepared solution in a clean beaker or flask and immerse it in a suitable bath, or place it in the freezing section of a refrigerator, until the sample has completely solidified. Record the

freezing temperature. After complete solidification has taken place, remove the sample and gently warm it to 60°F (15.6°C) without agitation. As soon as this temperature has been reached, remove the source of heat and stir the sample for 1 minute. At the end of this time make visual observation to ascertain whether or not the wetting agent has gone back into solution. The solution should become completely homogeneous upon completion of this test.

A-2-1.1.5 The pH of aqueous solutions of wetting agents is a measure of the acidity and alkalinity of the solution. Variations substantially below 7 or above 12 may result in serious increase in corrosion rate or may have material effect on its value in fire protection and fire extinguishment.

pH should be measured in accordance with standard practice procedures on a standard-type pH meter at water temperatures of 60°F ± 1° (15.6°C ± 0.6°). Any municipal water works laboratory can perform these tests.

A-2-1.2 Field experience and large-scale fire tests indicate: (1) that wet water foam, produced by discharging wetted water through a suitable nozzle, is more effective in control and/or extinguishment of fire than the same quantity of wetted water discharged through ordinary nozzles as a liquid and (2) the wetted water discharged through a nozzle as a liquid is more effective than the same quantity of water discharged through the same nozzle. Evaluation tests for Classes A and B of fires are discussed in A-2-1.2.1 and 2-1.2.2.

A-2-1.2.1 Acceptable evaluation tests of the effectiveness of water or solutions containing large percentages of water in control and/or extinguishment of fire in Class A combustibles have not been developed due primarily to the fact that

the results have had to be based on observers' judgment rather than on measurable items such as temperature, volume, and time. Wetted waters applied as liquids to burning Class A combustibles fall into this group of extinguishing agents that are difficult to evaluate. Wetted waters discharged through suitable nozzles and applied to burning Class A combustibles as wet water foam may be evaluated in measurable terms of volume and time. Wet water foam breaks down into a liquid at a rate proportional to the heat to which it is exposed and thus when applied on burning Class A combustibles its breakdown rate is dependent on the temperature of the combustibles and the necessary application rate is thus automatically determined. These factors can be physically measured, and evaluations of effectiveness may be made.

Appendix B Referenced Publications

B-1 The following documents or portions thereof are referenced within this standard for informational purposes only and thus are not considered part of the requirements of this document. The edition indicated for each reference is the current edition as of the date of the NFPA issuance of this document.

B-1.1 ASTM Publications.

American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

ASTM E380-1989, *Standard for Metric Practice*

ASTM D2256-1988, *Test Method for Breaking Load (Strength) and Elongation of Yarn by the Single-Strand Method*.

Index

©1990 National Fire Protection Association, All Rights Reserved.

The copyright in this index is separate and distinct from the copyright in the document which it indexes. The licensing provisions set forth for the document are not applicable to this index. This index may not be reproduced in whole or in part by any means without the express written permission of the National Fire Protection Association, Inc.

-A-	-F-
Application techniques 5-2	Fire department supply requirements 3-2
-B-	Fire hose, action on A-1-4.8.1
Basic requirements 1-5	Fires, classification of
-C-	Class A 1-4.2, 2-1.2.1, A-2-1.2.1
Combustible liquids	Definition 1-2
Definition and classifications 1-2	Class B 1-4.3, 2-1.2.2
Corrosive effects of wetting agents 1-4.8, A-1-4.8	Definition 1-2
-E-	Class C 1-4.4, A-1-4.4
Exposure protection 1-3.6	Definition 1-2
Extinguishers, portable fire, use of wetting agents in 1-4.10	Class D 1-4.5
	Definition 1-2
	Fixed fire protection systems 3-3
	Flammable liquids
	Definition and classifications 1-2
	Freezing, action after A-2-1.1.3(d)
	-I-
	Inspection of system 4-1
	Instructions for use Chap. 5

-L-

Limitations of wetting agents 1-4
Liquids see Combustible liquids; Flammable liquids

-M-

Maintenance of system 4-3
Marking of containers 2-1.3
Measurement, units of 1-6

-N-

Nozzle discharge 2-1.1.6

-P-

pH of solutions of wetting agents 2-1.1.5, A-2-1.1.5
Precautions 1-4
Proportioners 1-5.2
Purpose of standard 1-1.2

-S-

Scope of standard 1-1.1
Service regulations Chap. 4
Specifications for wetting agents Chap. 2
Storage of wetting agents 5-3

Supply requirements Chap. 3
Surface tension A-2-1.1.1

-T-

Testing of system 4-2
Tests
 Evaluation 2-1.1, A-2-1.1
 Fire extinguishment 2-1.2, A-2-1.2
Toxicity of wetting agents 1-4.9, 2-2

-U-

Uses of wetting agents 1-3, A-1-3.4
 With other than water 1-4.6
 With standard and new types of equipment 3-1

-V-

Viscosity of wetting agents 2-1.1.7

-W-

Wet water
 Definition 1-2, A-1-2
Wet water foam
 Definition 1-2
Wetting agents
 Definition 1-2
 Listed 1-3.4, 1-5.1, A-1-3.4

SUBMITTING PROPOSALS ON NFPA TECHNICAL COMMITTEE DOCUMENTS

**Contact NFPA Standards Administration for final date for receipt of proposals
on a specific document.**

INSTRUCTIONS

**Please use the forms which follow for submitting proposed amendments.
Use a separate form for each proposal.**

1. For each document on which you are proposing amendment indicate:
 - (a) The number and title of the document
 - (b) The specific section or paragraph.
2. Check the box indicating whether or not this proposal recommends new text, revised text, or to delete text.
3. In the space identified as "Proposal" include the wording you propose as new or revised text, or indicate if you wish to delete text.
4. In the space titled "Statement of Problem and Substantiation for Proposal" state the problem which will be resolved by your recommendation and give the specific reason for your proposal including copies of tests, research papers, fire experience, etc. If a statement is more than 200 words in length, the technical committee is authorized to abstract it for the Technical Committee Report.
5. Check the box indicating whether or not this proposal is original material, and if it is not, indicate source.
6. If supplementary material (photographs, diagrams, reports, etc.) is included, you may be required to submit sufficient copies for all members and alternates of the technical committee.
7. Type or print legibly in black ink.

NOTE: The NFPA Regulations Governing Committee Projects in Paragraph 10-10 state: Each proposal shall be submitted to the Council Secretary and shall include:

- (a) identification of the submitter and his affiliation (Committee, organization, company) where appropriate, and
- (b) identification of the document, paragraph of the document to which the proposal is directed, and
- (c) a statement of the problem and substantiation for the proposal, and
- (d) proposed text of proposal, including the wording to be added, revised (and how revised), or deleted.

FORM FOR PROPOSALS ON NFPA TECHNICAL COMMITTEE DOCUMENTS

Mail to: Secretary, Standards Council

National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101

Note: All proposals must be received by 5:00 p.m. E.S.T./E.S.D.T. on the published proposal closing date.

Date 5/18/85 Name John B. Smith Tel. No. 617-555-1212

Address 9 Seattle St., Seattle, WA 02255

Representing (Please indicate organization, company or self) Fire Marshals Assn. of North America

1. a) Document Title: Protective Signaling Systems NFPA No. & Year NFPA 72D

b) Section/Paragraph: 2-7.1 (Exception)

2. Proposal recommends: (Check one) ☐ new text
☐ revised text
☒ deleted text.

3. Proposal (include proposed new or revised wording, or identification of wording to be deleted):

Delete exception.

FOR OFFICE USE ONLY

Log #: _____

Date Rec'd: _____

Proposal #: _____

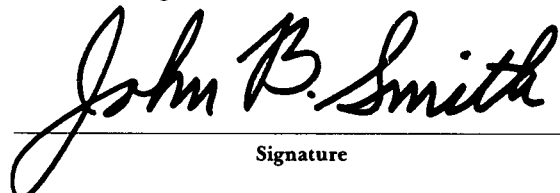
4. Statement of Problem and Substantiation for Proposal:

A properly installed and maintained system should be free of ground faults. The occurrence of one or more ground faults should be required to cause a "trouble" signal because it indicates a condition that could contribute to future malfunction of the system. Ground fault protection has been widely available on these systems for years and its cost is negligible. Requiring it on all systems will promote better installations, maintenance and reliability.

5. ☒ This Proposal is original material.
☐ This Proposal is not original material; its source (if known) is as follows: _____

(Note: Original material is considered to be the submitter's own idea based on or as a result of his own experience, thought, or research and, to the best of his knowledge, is not copied from another source.)

I agree to give NFPA all and full rights, including rights of copyright, in this Proposal and I understand that I acquire no rights in any publication of NFPA in which this Proposal in this or another similar or analogous form is used.


Signature

PLEASE USE SEPARATE FORM FOR EACH PROPOSAL