

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
H

AS1004™

RATIONALE

FEDERAL SUPPLY CLASS
4730

DRAWING NOTE #10 INCORRECTLY REFERENCED AS1376 TABLE 2. ALSO, QPL NOTE /4/ HAS BEEN CHANGED, PER THE NEWLY ADOPTED VERBIAGE AGREED TO DURING OUR SEPTEMBER G3 CONFERENCE.

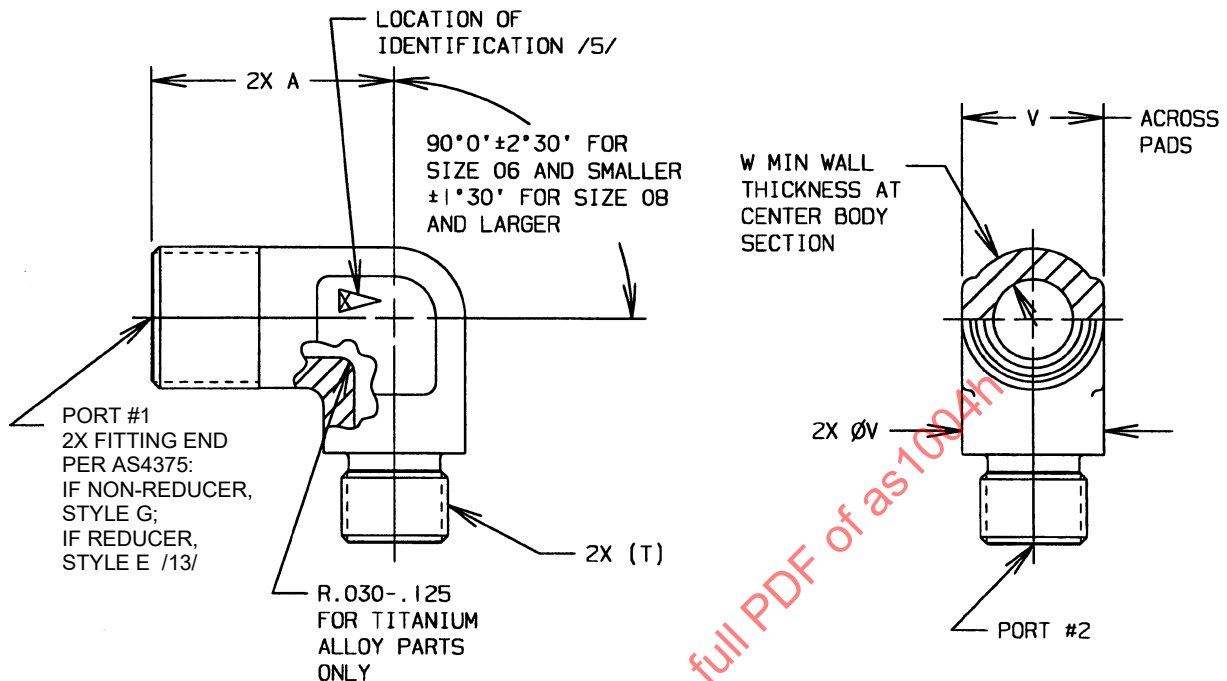



FIGURE 1 - FITTING, ELBOW, 90°, PORT #2 SHOWN AS REDUCER

TABLE 1 - DIMENSIONS AND WEIGHTS /12/

BASIC NO. AS1004 /11/ /21/ SIZE CODE	V	W	LB/EA APPROX REF ALUM	LB/EA APPROX REF STEEL	LB/EA APPROX REF TI
02	.297-.314	.090	.0105	.0300	.0166
03	.360-.377	.100	.0162	.0465	.0257
04	.423-.440	.110	.0217	.0624	.0344
05	.485-.502	.120	.0295	.0847	.0467
06	.547-.565	.120	.0378	.109	.0599
08	.735-.753	.150	.0783	.225	.124
10	.860-.878	.170	.0959	.275	.152
12	1.047-1.065	.185	.179	.514	.283
14	1.173-1.191	.200	.227	.652	.359
16	1.292-1.317	.205	.276	.791	.436
20	1.605-1.630	.240	.466	1.34	.739
24	1.855-1.880	.250	.595	1.71	.943
32	2.542-2.572	.350	1.40	4.01	2.21

For more information on this standard, visit
<https://www.sae.org/standards/content/AS1004H/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: AS18280 /4/



AEROSPACE STANDARD

FITTING, ELBOW, 90°,
STANDARD AND REDUCER,
FLARELESS

AS1004™
SHEET 1 OF 4

REV.
H

Copyright © 2022 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1966-03 REAFFIRMED 2005-06 REVISED 2022-05

TABLE 2 - LEG LENGTH A

FORGING SIZE /11/	TUBE SIZE OF PORT #1 OR #2 /13/												
	02	03	04	05	06	08	10	12	14	16	20	24	32
02	.773	-	-	-	-	-	-	-	-	-	-	-	-
03	.789	.836	-	-	-	-	-	-	-	-	-	-	-
04	.820	.867	.898	-	-	-	-	-	-	-	-	-	-
05	.883	.930	.961	.961	-	-	-	-	-	-	-	-	-
06	.961	1.008	1.039	1.039	1.055	-	-	-	-	-	-	-	-
08	1.086	1.133	1.164	1.164	1.180	1.273	-	-	-	-	-	-	-
10	1.180	1.226	1.258	1.258	1.274	1.367	1.430	-	-	-	-	-	-
12	1.272	1.320	1.351	1.351	1.367	1.460	1.523	1.586	-	-	-	-	-
14	1.398	1.445	1.476	1.476	1.492	1.585	1.648	1.742	1.680	-	-	-	-
16	1.429	1.476	1.507	1.507	1.523	1.616	1.679	1.742	1.742	1.742	-	-	-
20	1.585	1.632	1.663	1.663	1.679	1.772	1.835	1.898	1.898	1.898	1.898	-	-
24	1.710	1.757	1.788	1.788	1.804	1.897	1.960	2.023	2.023	2.023	2.023	2.023	-
32	2.148	2.195	2.226	2.226	2.242	2.335	2.398	2.461	2.461	2.461	2.461	2.461	2.461

TABLE 3 - TUBE SIZE AND CORRESPONDING THREAD

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A
02	.125	.3125-24 UNJF
03	.188	.3750-24 UNJF
04	.250	.4375-20 UNJF
05	.312	.5000-20 UNJF
06	.375	.5625-18 UNJF
08	.500	.7500-16 UNJF
10	.625	.8750-14 UNJF
12	.750	1.0625-12 UNJ
14	.875	1.1875-12 UNJ
16	1.000	1.3125-12 UNJ
20	1.250	1.6250-12 UNJ
24	1.500	1.8750-12 UNJ
32	2.000	2.5000-12 UNJ

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

- CODE LETTER DASH (-): TYPE 4130 STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758, EXCEPT HEAT TREATMENT PER PROCUREMENT SPECIFICATION. /2/
- CODE LETTER D: TYPE 2024-T6 OR -T851 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/6 OR TYPE 2014-T6 ALUMINUM ALLOY FORGING PER AMS4133. /2/
- CODE LETTER F: TYPE 4130 LOW ALLOY STEEL FORGING OR BAR PER AMS6370 OR AMS-S-6758, EXCEPT HEAT TREATMENT PER PROCUREMENT SPECIFICATION. /2/
- CODE LETTER J: TYPE 304 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5639 OR AMS-QQ-S-763, EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
- CODE LETTER K: TYPE 316 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5648 OR AMS-QQ-S-763, EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/

	AEROSPACE STANDARD	AS1004™ SHEET 2 OF 4	REV. H
	FITTING, ELBOW, 90°, STANDARD AND REDUCER, FLARELESS		

- f. CODE LETTER R: TYPE 321 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5645 OR AMS-QQ-S-763, EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
 - g. CODE LETTER S: TYPE 347 CORROSION RESISTANT STEEL FORGING OR BAR PER AMS5646 OR AMS-QQ-S-763, EXCEPT HARDNESS PER PROCUREMENT SPECIFICATION. /2/
 - h. CODE LETTER T: TYPE 6AL-4V TITANIUM ALLOY FORGING OR BAR PER AMS4928.
 - i. CODE LETTER W: TYPE 7075-T73 ALUMINUM ALLOY FORGING PER AMS4141 OR AMS-QQ-A-367; OR 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124; OR 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9. /2/
- /2/ HEAT TREATMENT:
- a. MATERIAL CODE LETTER (-) AND F: HARDNESS SHALL BE 92 HRB TO 40 HRC PER PROCUREMENT SPECIFICATION.
 - b. MATERIAL CODE LETTERS D AND W: ELECTRICAL CONDUCTIVITY AND HARDNESS PER PROCUREMENT SPECIFICATION.
 - c. MATERIAL CODE LETTERS J, K, R, AND S: HARDNESS SHALL BE 80 HRB MINIMUM PER PROCUREMENT SPECIFICATION.
 - d. OTHER MATERIAL CODES: NONE.
- /3/ FINISH:
- a. MATERIAL CODE LETTER (-) AND F: CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.
 - b. MATERIAL CODE LETTER D: ANODIZE PER AMS2472 OR MIL-A-8625, TYPE II, CLASS 2, DYE GREEN SIMILAR TO COLOR 14187 OF AMS-STD-595.
 - c. MATERIAL CODE LETTERS J, K, R, AND S: PASSIVATE PER AMS2700 TYPE 6 OR 7.
 - d. MATERIAL CODE LETTER T: FLUORIDE PHOSPHATE CONVERSION COAT PER AMS2486 OR ANODIZE PER AMS2488, TYPE 2.
 - e. MATERIAL CODE LETTER W:
 - (1) W CODE PARTS TO BE ANODIZED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE ANODIZE PER AMS2472 OR PER MIL-A-8625, TYPE II, CLASS 2 DYED BROWN, SIMILAR TO COLOR 10080 OF AMS-STD-595.
 - (2) W CODE PARTS TO BE COATED WITH HIGH PURITY ALUMINUM ONLY WILL HAVE THE FINISH CODE LETTER "V" AFTER THE SIZE CODE IN THE PART NUMBER. SEE PROCUREMENT SPECIFICATION FOR REQUIREMENTS.
- /4/ PROCUREMENT SPECIFICATION: AS18280, EXCEPT AS SPECIFIED ON THIS STANDARD. PRODUCT MANUFACTURED TO THIS STANDARD SHALL MEET THE REQUIREMENTS SPECIFIED HEREIN AND THE PROCUREMENT SPECIFICATION. ORIGINAL COMPONENT MANUFACTURERS (OCM) AND VALUE ADDED DISTRIBUTORS (VAD) SHALL BE LISTED IN THE PRI QUALIFIED PRODUCTS LIST (QPL) PRI-QPL-AS18280 FOR THIS STANDARD. SEE www.eAuditNet.com FOR CURRENT QPL ONLINE.
- /5/ IDENTIFICATION AT LOCATION SHOWN: MARK PER AS478 CLASS C OR D OR METHOD 7A3, 15A3, OR 15B.
- a. FOR SIZE 06 AND SMALLER, MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, LETTERS "AS," AND MATERIAL CODE LETTER.
 - b. FOR SIZE 08 AND LARGER, MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, BASIC PART NUMBER, AND MATERIAL CODE LETTER.
6. INVENTORIED PARTS CONFORMING TO THE PREVIOUS ISSUE MAY BE USED TO DEPLETION.
7. INTENDED USE: THIS PART IS DESIGNED FOR USE IN TUBING CONNECTION SYSTEMS WITH NOMINAL OPERATING PRESSURES AS FOLLOWS:
- a. SIZES 02 THROUGH 24 IN LOW ALLOY STEEL, CORROSION RESISTANT STEEL, AND TITANIUM ALLOY AT 3000 PSI.
 - b. SIZES 02 THROUGH 20 IN ALUMINUM ALLOY AND SIZE 32 IN ALL OTHER MATERIALS AT 1500 PSI.
 - c. SIZE 24 IN ALUMINUM ALLOY AT 1000 PSI.
 - d. SIZE 32 IN ALUMINUM ALLOY AT 600 PSI.

	AEROSPACE STANDARD	AS1004™ SHEET 3 OF 4	REV. H
	FITTING, ELBOW, 90°, STANDARD AND REDUCER, FLARELESS		