



SURFACE VEHICLE RECOMMENDED PRACTICE

SAE**J318 MAY2013**Issued 1967-11
Revised 2013-05

Superseding J318 JUN2012

Automotive Air Brake Line Couplers (Gladhands)

RATIONALE

This document is being revised to update the test pressure, corrosion requirements and allowable leak rates.

1. SCOPE

This SAE Recommended Practice is intended to provide design, interchangeable dimensions, testing procedures, performance requirements, and minimum identification for gladhand-type air line couplers used to connect the brake systems of trucks, truck-tractors, trailers, and dollies when these vehicles are joined to operate as a combination unit.

1.1 Purpose

The purpose is to provide coupler halves for brake lines on one vehicle that will be identified and compatible with the coupler halves on the brake lines of another vehicle.

2. REFERENCES

2.1 Applicable Document

The following publication forms a part of the specification to the extent specified herein.

2.1.1 ASTM Publication

Available from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959, Tel: 610-832-9585, www.astm.org

ASTM B117 Standard Method of Salt Spray (Fog) Testing

3. DESIGN AND INTERCHANGEABILITY DIMENSIONS

3.1 Design is limited only to those areas having dimensions that ensure interchangeability. Any material may be used, providing that the coupler meet the performance requirements. Other devices may be included in the gladhand, such as a quick-release valve or shut-off valve. Recommended practices for these devices are not included in this document.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2013 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
SAE WEB ADDRESS: <http://www.sae.org>

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J318_201305**

3.2 General design and interchangeability dimensions are shown for polarized and non-polarized couplers as follows in Figures 1 to 3.

Use of non-polarized couplings is not recommended because they will mate with either polarized couplings which could result in incorrect connections between vehicles.

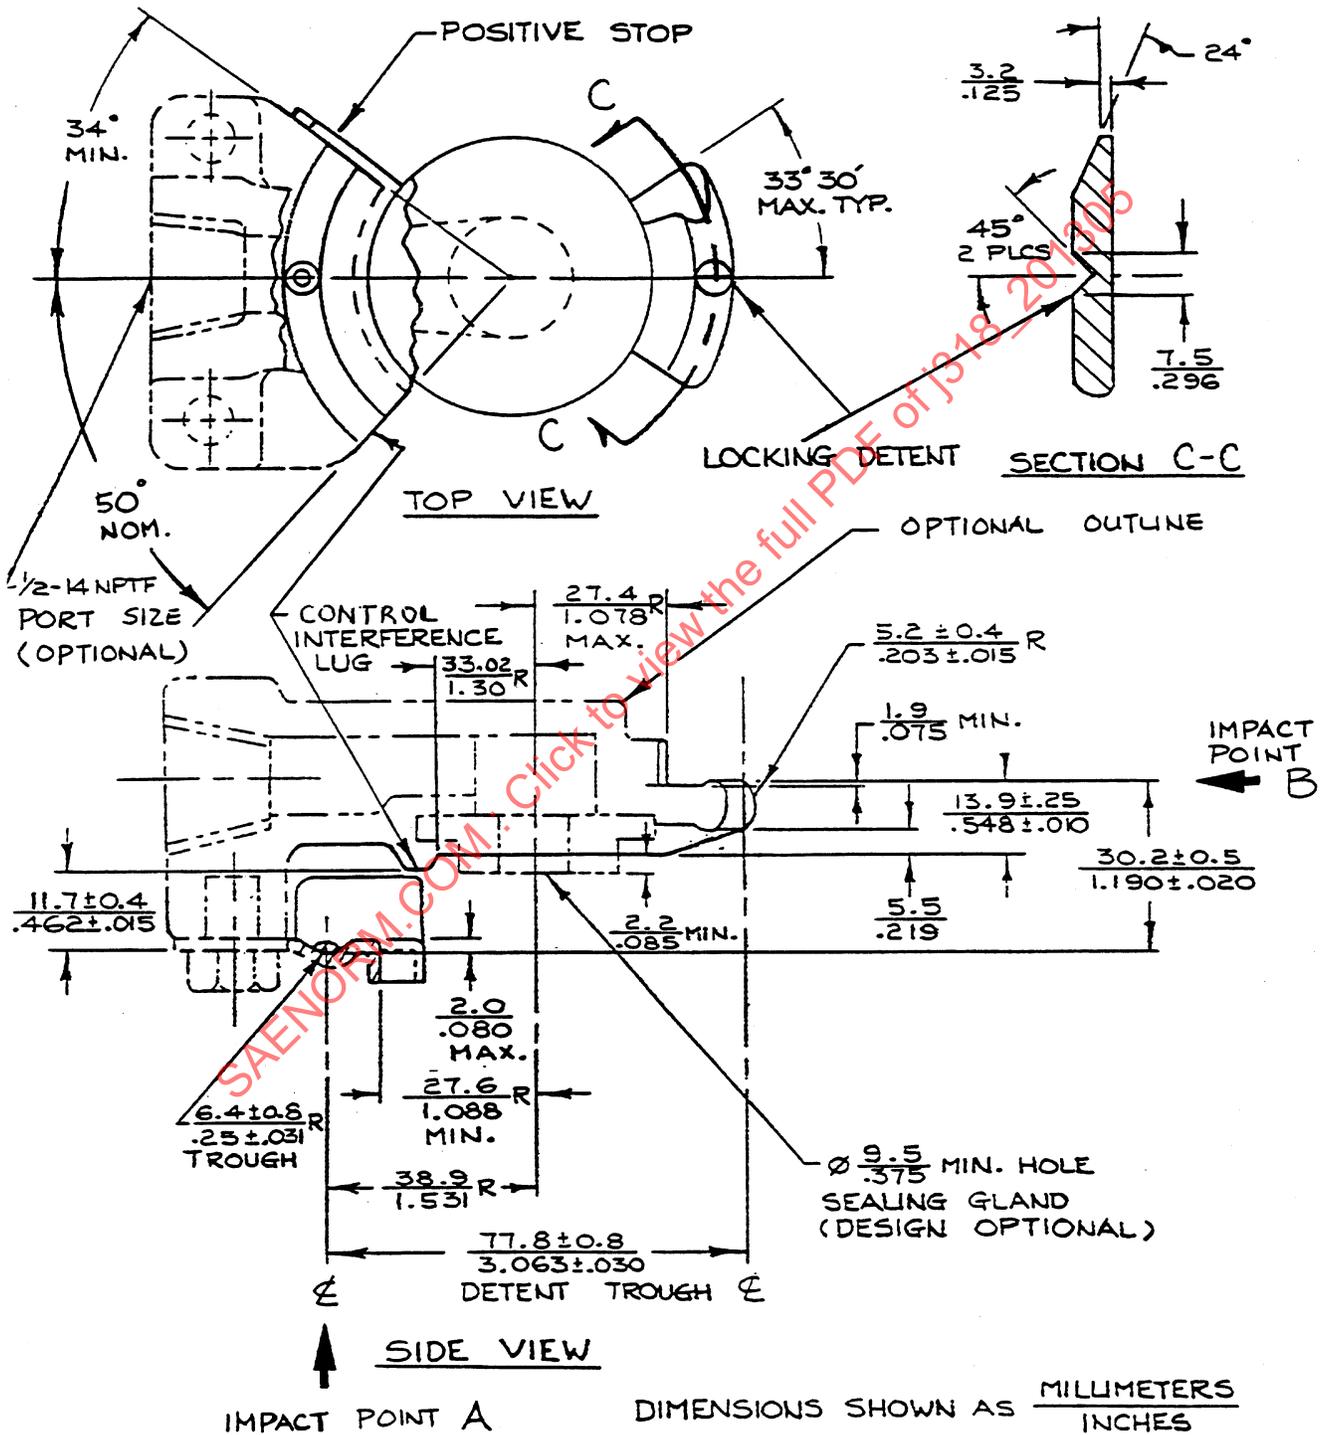


FIGURE 1 - CONTROL (SERVICE) AIR BRAKE COUPLER

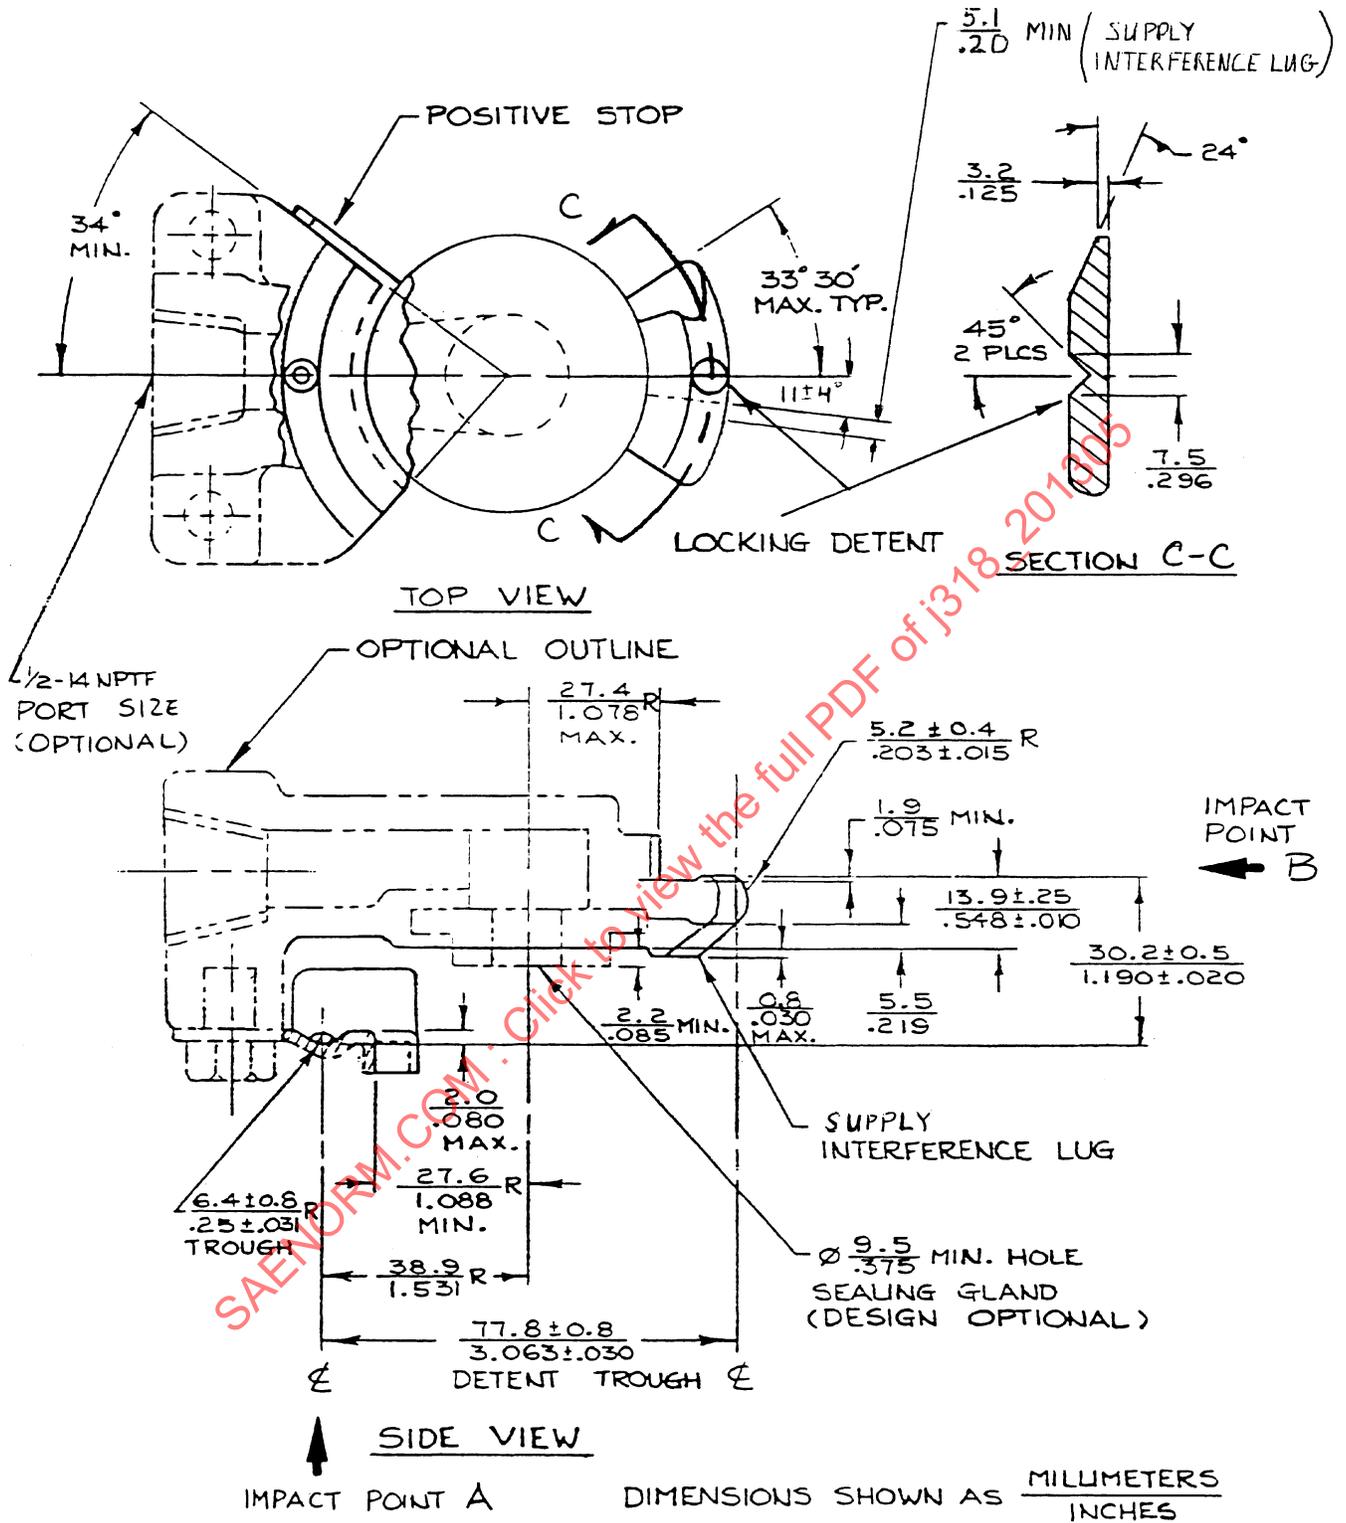


FIGURE 2 - SUPPLY (EMERGENCY) AIR BRAKE COUPLER

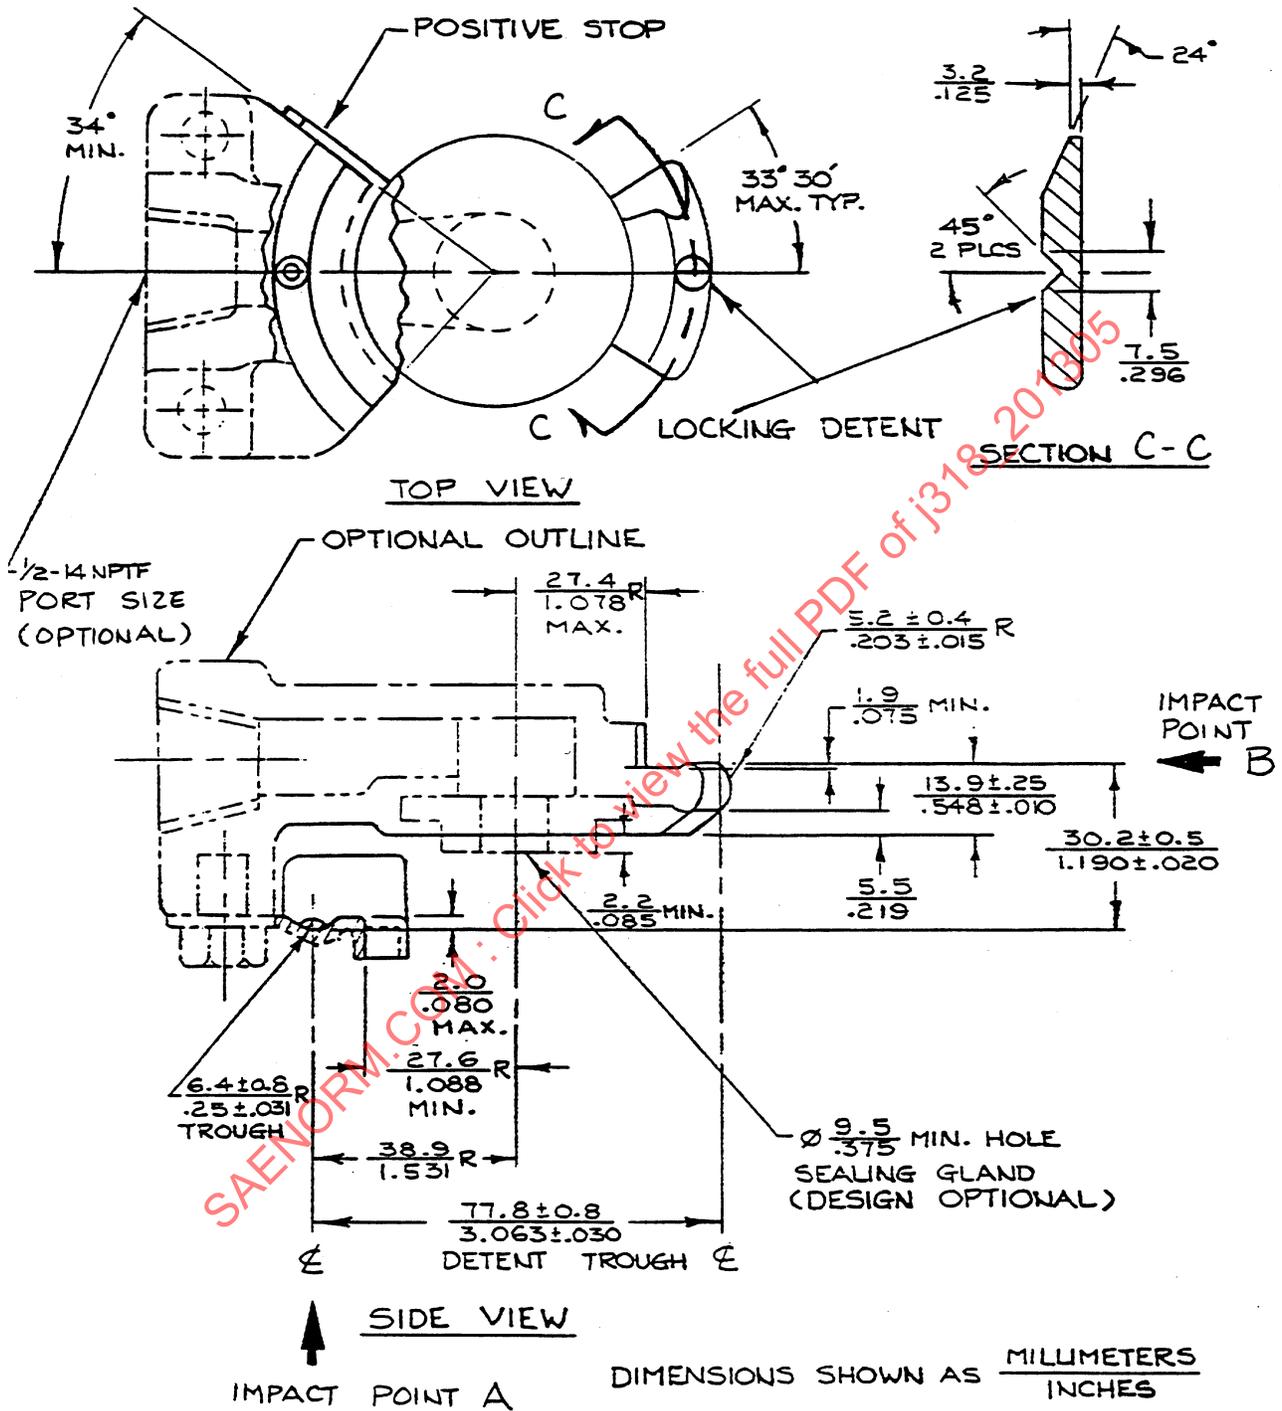


FIGURE 3 - UNIVERSAL AIR BRAKE COUPLER

4. TEST PROCEDURE

4.1 Corrosion Resistance Test

Two new pairs of couplers (one pair properly coupled with the threaded ports(s) plugged and without internal pressure, and one pair uncoupled) shall be subjected to ASTM B117 for 240 h.

4.2 Endurance Test

A new pair of couplers shall be coupled and uncoupled in the normal manner for 2500 complete cycles at a rate (speed) of 15 to 25 cycles per minute. One complete cycle shall consist of one coupling and one uncoupling.

4.3 Break Away Test

Properly joined, a new pair of couplers shall be pulled apart (10) times when connected to a line having 931 kPa \pm 34 kPa (135 psi \pm 5 psi) air pressure under a gradually applied load of not less than 222 N (50 lbf) nor more than 1334 N (300 lbf) along the hose axis.

4.4 Drop Test

Two new couplers shall be dropped from 1.8 m (6 ft) minimum onto concrete surface immediately after exposure to a temperature of $-40\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$) for a minimum of 6 h. Orientation of the couplers shall be such that the couplers impact the concrete surface at points A and B as indicated in Figures 1 to 3.

4.5 Elevated Temperature

Two new pairs of couplers (one properly coupled and one uncoupled) shall be exposed to a temperature of $+70\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ ($+158\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$) for a minimum of 24 h.

4.6 Low Temperature

Two new pairs of couplers (one properly coupled and one uncoupled) shall be exposed to a temperature of $-40\text{ }^{\circ}\text{C} \pm 3\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F} \pm 5\text{ }^{\circ}\text{F}$) for a minimum of 6 h.

5. PERFORMANCE REQUIREMENTS

After standard completion of each test procedure shown under Section 4, the coupler(s) shall satisfy each of the following performance requirements.

5.1 Coupling and Uncoupling Torque Performance

The torque required to uncouple a pair of couplers in a normal manner at an ambient temperature of $+24\text{ }^{\circ}\text{C} \pm 8\text{ }^{\circ}\text{C}$ ($+75\text{ }^{\circ}\text{F} \pm 15\text{ }^{\circ}\text{F}$) and at 689 kPa \pm 34 kPa (100 psi \pm 5 psi) air pressure shall be 11.3 Nm \pm 5.6 Nm (100 lbf-in \pm 50 lbf-in). The torque required to couple and uncouple a pair of couplers at an ambient temperature of $+24\text{ }^{\circ}\text{C} \pm 8\text{ }^{\circ}\text{C}$ ($+75\text{ }^{\circ}\text{F} \pm 15\text{ }^{\circ}\text{F}$) and at 0 kPa (0 psi) air pressure shall be 11.3 Nm \pm 5.6 Nm (100 lbf-in \pm 50 lbf-in).

5.2 Leak Rate

A pair of coupler halves, when joined properly is allowed a maximum leak rate of 25 SCCM of free air at 931 kPa \pm 34 kPa (135 psi \pm 5 psi) air pressure and ambient temperature of $+24\text{ }^{\circ}\text{C} \pm 8\text{ }^{\circ}\text{C}$ ($+75\text{ }^{\circ}\text{F} \pm 15\text{ }^{\circ}\text{F}$).