

# INTERNATIONAL STANDARD

**ISO/IEC**  
**14165-131**

First edition  
2000-05

---

---

**Information technology –  
Fibre Channel –**

**Part 131:  
Switch Fabric Requirements (FC-SW)**



Reference number  
ISO/IEC 14165-131:2000(E)



# INTERNATIONAL STANDARD

**ISO/IEC**  
**14165-131**

First edition  
2000-05

---

---

**Information technology –  
Fibre Channel –**

**Part 131:  
Switch Fabric Requirements (FC-SW)**

© ISO/IEC 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

---

---



PRICE CODE

**X**

*For price, see current catalogue*

<b>Contents</b>	<b>Page</b>
Foreword	1
Introduction	1
1 Scope	1
2 Normative references	1
2.1 General Provisions	1
2.2 Approved references	1
2.3 References under development	1
2.4 Other references	2
3 Definitions and conventions	2
3.1 Definitions	2
3.2 Editorial conventions	6
3.2.1 Binary notation	7
3.2.2 Hexadecimal notation	7
3.3 Abbreviations, acronyms, and symbols	7
3.3.1 Acronyms and abbreviations	7
3.3.2 Symbols	7
4 Structure and Concepts	9
4.1 Fabric	9
4.2 Switch	9
4.3 Switch Topologies	11
4.4 Switching characteristics	11
4.4.1 Synchronous switching	11
4.4.2 Asynchronous switching	11
4.5 Switch Ports	11
4.5.1 F_Port	12
4.5.2 FL_Port	12
4.5.3 E_Port	12
4.6 Fabric Addressing	12
4.7 Class F Service	14
4.8 Relationship Between this Standard and FC-FG	14
5 Switch Ports	15
5.1 General Model	15
5.2 Model elements	15
5.2.1 FC Transports	15
5.2.2 Switch Transport	15
5.2.3 Control Facilities	15
5.2.4 Link Services	15
5.3 F_Port Operation	15
5.3.1 Model	16
5.3.2 Link Behavior	16
5.4 FL_Port Operation	17
5.4.1 Model	17
5.4.2 Link Behavior	18
5.5 E_Port Operation	18
5.5.1 Model	18
5.5.2 Inter-Switch Link Behavior	19
5.6 Class F Service	20
5.6.1 Class F Function	20
5.6.2 Class F Rules	20
5.6.3 Class F Frame Format	22
5.6.4 Class F Flow Control	22
6 Switch Fabric Services	23
6.1 Switch Fabric Internal Link Services (SW_ILS)	23
6.1.1 Switch Fabric Internal Link Service Accept (SW_ACC)	23
6.1.2 Switch Fabric Internal Link Service Reject (SW_RJT)	24
6.1.3 Exchange Link Parameters (ELP)	26
6.1.4 Exchange Fabric Parameters (EFP)	30
6.1.5 Announce Address Identifier (AAI)	33
6.1.6 Request Domain_ID (RDI)	34

**Contents****Page**

6.1.7 Build Fabric (BF)	36
6.1.8 Reconfigure Fabric (RCF)	37
6.1.9 Disconnect Class 1 Connection (DSCN)	38
6.1.10 Detect Queued Class 1 Connection Request Deadlock (LOOPD)	39
<b>7 Fabric Configuration</b>	<b>42</b>
7.1 Summary	42
7.2 Switch Port Initialization	42
7.3 Principal Switch Selection	46
7.4 Address Distribution	49
7.4.1 Domain_ID Distribution by the Principal Switch	49
7.4.2 Domain_ID Requests by the Switches	50
7.5 E_Port and Fabric Isolation	52
<b>Annex A (informative) - Future Projects</b>	<b>53</b>
A.1 Switch Standards in development	53
A.2 Switch Technical Reports in development	53
<b>Annex B (informative) - Examples of Switch Port Initialization</b>	<b>54</b>
B.1 Examples Overview	54
B.2 Example 1: two E/F/FL_Port-capable Switch Ports	54
B.3 Example 2: two E/F/FL_Port-capable Switch Ports and one Nx_Port	55
B.4 Example 3: one E/F/FL_Port-capable Port and one E/F_Port-capable Port	56
<b>Annex C (informative) - Fibre Channel Link Switch Command Set for FC-AE</b>	<b>57</b>
C.1 Scope	57
C.2 Technical Description	57
C.2.1 Definition	57
C.2.2 Context	57
C.2.3 Command Set	63
C.2.4 Example Usage of Link Switch Control Interface	75
C.2.4.1 Example Using Only Individual Link Switch Port Commands.	76
C.2.4.2 Example Using N_Port-Level Commands.	77
<b>Index</b>	<b>81</b>

## Figures

1. Switch Model	9
2. Multiple Switch Fabric Example	10
3. Domain, Area, and Port Address Partitioning	12
4. F_Port Model	16
5. FL_Port Model	17
6. E_Port Model	18
7. Principal Inter-Switch Links	20
8. Class F Frame Format	22
9. Switch Port Mode Initialization Flow	43
10. Simultaneous ELP Processing	46
11. Propagation of BF and RCF SW_ILS requests	47
12. RDI Request Processing by Principal Switch	50
13. RDI Request Processing by non-Principal Switch	51
B.1. Initialization example 1	54
B.2. Initialization example 2	55
B.3. Initialization example 3	56
C.1. Software Context for Link Switch Control	58
C.2. Example 1 of System Context With Out-of-Band Control	59
C.3. Example 2 of System Context With Out-of-Band Control	59
C.4. Example of System Context With in-Band Control	60
C.5. Example 3 of System Context With Out-of-Band Control	61
C.6. Example 4 of System Context With Out-of-Band Control	62
C.7. Example System Interconnection	76

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000

**Tables****Page**

1. Address Identifier Values .....	13
2. SW_ILS Command Codes .....	23
3. SW_RJT Payload .....	24
4. SW_RJT Reason Codes .....	24
5. SW_RJT Reason Code Explanation .....	25
6. ELP Request Payload .....	26
7. E_Port Class F Service Parameters .....	27
8. Class 1 E_Port Parameters .....	28
9. Class 2 E_Port Parameters .....	28
10. Class 3 E_Port Parameters .....	29
11. ELP Accept Payload .....	30
12. EFP Request Payload .....	31
13. Switch_Priority Field Values .....	31
14. Domain_ID_List Record Format .....	32
15. Record_Type Field Values .....	32
16. EFP Accept Payload .....	33
17. AAI Request Payload .....	33
18. AAI Accept Payload .....	34
19. RDI Request Payload .....	35
20. RDI Accept Payload .....	36
21. BF Request Payload .....	37
22. BF Accept Payload .....	37
23. RCF Request Payload .....	38
24. RCF Accept Payload .....	38
25. DSCN Request Payload .....	39
26. DSCN Reason Codes .....	39
27. DSCN Accept Payload .....	39
28. LOOPD Request Payload .....	40
29. LOOPD Accept Payload .....	41
30. Fabric Configuration Summary .....	42
31. Responses to ELP Request for Originating E_Port .....	44
32. Recommended BF and RCF Usage Summary .....	47

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) together form a system for world-wide standardization as a whole. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other internal organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in this work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for approval before their acceptance as International Standards. They are approved in accordance with procedures requiring at least 75% approval by the national bodies voting.

International Standard ISO/IEC 14165-131 was prepared by Joint Technical Subcommittee ISO/IEC JTC 1, *Information Technology*, Subcommittee SC 25, *Interconnection of Information Technology Equipment*.

This part of ISO/IEC 14165 describes tools and algorithms for interconnection and initialization of Fibre Channel switches to create a multi-switch Fibre Channel Fabric.

ISO/IEC 14165 will consist of the following parts, under the general title *Information technology - Fibre Channel*

- Part 111: Physical and Signaling Interface (FC-PH)
- Part 112: Physical and Signaling Interface - Two (FC-PH-2)
- Part 122: Arbitrated Loop - 2 (FC-AL-2)
- Part 131: Switch Fabric Requirements (FC-SW)
- Part 141: Generic Fabric Requirements (FC-FG)
- Part 211: Mapping to HIPPI-FP (FC-FP)
- Part 222: Single-Byte Command Code Sets - 2 (FC-SB-2)
- Part 412: Generic Services -2 (FC-GS-2)

Annexes A through C are not integral part of ISO/IEC 14165-131, but are included for information only.



## Introduction

This ISO/IEC standard for FC-SW specifies tools and algorithms for interconnection and initialization of Fibre Channel switches to create a multi-switch Fibre Channel Fabric. This Standard defines an E\_Port ("Expansion Port") that operates in a manner similar to an N\_Port and F\_Port, as defined in ISO/IEC 14165-111, with additional functionality provided for interconnecting switches.

This standard describes the following:

- An overview of the Switched-based Fabric;
- The general behavior for all modes of the Switch Port;
- The services provided for use by the Switch Fabrics;
- Fabric Configuration process.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000

# Information Technology Fibre Channel

## Part 131: Switch Fabric Requirements (FC-SW)

### 1 Scope

This ISO/IEC standard for FC-SW specifies tools and algorithms for interconnection and initialization of Fibre Channel switches to create a multi-switch Fibre Channel Fabric. This Standard defines an E\_Port ("Expansion Port") that operates in a manner similar to an N\_Port and F\_Port, as defined in ISO/IEC 14165-111, with additional functionality provided for interconnecting switches.

This Standard also defines how ports that are capable of being an E\_Port, F\_Port, and/or FL\_Port may discover and self-configure for their appropriate operating mode. Once a port establishes that it is connected to another switch and is operating as an E\_Port, an address assignment algorithm is executed to allocate port addresses throughout the Fabric.

This Standard does not define credit models and management between E\_Ports for the various Classes of Service other than Class F. Broadcast and multicast services are not defined. E\_Ports conforming to this Standard support Class F, and also Class 1, Class 2, and/or Class 3; support for other Classes of Service are not defined by this Standard. The method by which routing of frames is established and effected is not described.

### 2 Normative references

#### 2.1 General Provisions

The following Standards contain provisions which, through reference in the text, constitute provisions of ISO/IEC 14165. At the time of publication, the editions indicated were valid. All Standards are subject to revision, and parties to agreements based on ISO/IEC 14165 are encouraged to investigate the possibility of applying the most recent editions of the Standards listed below. Members of IEC and ISO maintain registers of currently valid international standards.

#### 2.2 Approved references

- [1] ISO/IEC 14165-111, *Information Technology - Fibre Channel Physical and Signaling Interface (FC-PH)*.
- [2] ISO/IEC 14165-112, *Information Technology - Fibre Channel - Physical and Signaling Interface-2 (FC-PH-2)*
- [3] ISO/IEC 14165-122, *Information Technology - Fibre Channel - Arbitrated Loop - 2 (FC-AL-2)*.
- [4] ISO/IEC 14165-412, *Information Technology - Fibre Channel - Generic Services - 2 (FC-GS-2)*.
- [5] ISO/IEC 14165-141, *Information Technology - Fibre Channel - Generic Fabric Requirements (FC-FG)*.

#### 2.3 References under development

At the time of publication, the following referenced Standards were still under development. For information on the current status of the document, or regarding availability, contact the relevant Standards body or other organization as indicated.

- [6] ISO/IEC 14165-113, *Fibre Channel - Physical and Signaling Interface-3 (FC-PH-3)*

[7] ISO/IEC 14165-241, *Fibre Channel - Backbone (FC-BB)*

## 2.4 Other references

Profiles provided by the Fibre Channel Association (FCA) are available from the Fibre Channel Association (FCA), 12407 MoPac Expressway North 100-357, P. O. Box 9700, Austin, TX 78758-9700; (800) 272-4618 (phone); or via e-mail, FCA-Info@amcc.com.

[8] FCSI-101, *FCSI Common FC-PH Feature Sets Used in Multiple Profiles*, Rev 3.1

[9] *FCA N\_Port to F\_Port Interoperability Profile*, Rev 1.0

## 3 Definitions and conventions

### 3.1 Definitions

#### 3.1.1

##### **address assignment**

a process whereby addresses are dispensed to Switches and Switch Ports.

#### 3.1.2

##### **address identifier**

as defined in FC-PH (see reference [1]), an unsigned 24-bit address value used to uniquely identify the source (S\_ID) and destination (D\_ID) of Fibre Channel frames.

#### 3.1.3

##### **address Manager**

a logical entity within a Switch which is responsible for address assignment.

#### 3.1.4

##### **area**

as defined in FC-FG (see reference [5]), the second level in a three-level addressing hierarchy.

#### 3.1.5

##### **area Identifier**

as defined in FC-FG (see reference [5]), bits 15 through 8 of an address identifier.

#### 3.1.6

##### **class F service**

as defined in FC-FG (see reference [5]), a service which multiplexes frames at frame boundaries that is used for control and coordination of the internal behavior of the Fabric.

#### 3.1.7

##### **class N service**

a generic reference to a Class 1, Class 2, or Class 3 service, as defined in FC-PH (see reference [1]).

#### 3.1.8

##### **domain**

as defined in FC-FG (see reference [5]), the highest level in a three-level addressing hierarchy.

#### 3.1.9

##### **domain Address Manager**

a Principal Switch which is responsible for address assignment to other Switches outside of its Domain.

#### 3.1.10

##### **domain Identifier**

as defined in FC-FG (see reference [5]), bits 23 through 16 of an address identifier.

**3.1.11****domain\_ID\_List**

a list in which each record contains a Domain\_ID value and the Switch\_Name of the Switch assigned the Domain\_ID.

**3.1.12****downstream Principal ISL**

from the point of view of the local Switch, the downstream Principal ISL is the Principal ISL to which frames may be sent from the Principal Switch to the destination Switch. All Principal ISLs on the Principal Switch are downstream Principal ISLs. A Switch that is not the Principal Switch may have zero or more downstream Principal ISLs.

**3.1.13****E\_Port**

as defined in FC-FG (see reference [5]), a Fabric "Expansion" Port which attaches to another E\_Port to create an Inter-Switch Link.

**3.1.14****E\_Port Identifier**

an address identifier assigned to an E\_Port.

**3.1.15****E\_Port\_Name**

a Name\_Identifier which identifies an E\_Port for identification purposes. The format of the name is specified in FC-PH. Each E\_Port shall provide a unique E\_Port\_Name within the Fabric.

**3.1.16****Error\_Detect\_Timeout value**

a time constant defined in FC-PH. In this Standard, the recommended value of this time constant is 2 seconds.

**3.1.17****F\_Port**

as defined in FC-PH (see reference [1]). In this Standard, an F\_Port is assumed to always refer to a port to which non-loop N\_Ports are attached to a Fabric, and does not include FL\_Ports.

**3.1.18****Fabric**

As defined in FC-FG (see reference [5]), an entity which interconnects various Nx\_Ports attached to it and is capable of routing frames using only the D\_ID information in an FC-2 frame header.

**3.1.19****Fabric Controller:**

1. as defined in FC-FG (see reference [5]), the logical entity responsible for operation of the Fabric. 2. the entity at the well-known address hex 'FF FF FD'.

**3.1.20****Fabric Element**

1. As defined in FC-FG (see reference [5]), the smallest unit of a Fabric which meets the definition of a Fabric. From the point of view of an attached Nx\_Port, a Fabric consisting of multiple Fabric Elements is indistinguishable from a Fabric consisting of a single Fabric Element.

**3.1.21****Fabric F\_Port**

the entity at the well-known address hex 'FF FF FE'. See reference [1].

**3.1.22****FL\_Port**

an L\_Port which is able to perform the function of an F\_Port, attached via a link to one or more NL\_Ports in an Arbitrated Loop topology (see FC-AL). The AL\_PA of an FL\_Port is hex'00'. In this Standard, an FL\_Port is assumed to always refer to a port to which NL\_Ports are attached to a Fabric, and does not include F\_Ports.

### 3.1.23

#### **Fx\_Port**

a Switch Port capable of operating as an F\_Port or FL\_Port.

### 3.1.24

#### **Fabric\_Stability\_Timeout value**

a time constant used to detect inactivity during Fabric Configuration. The value of this time constant shall be 5 seconds.

### 3.1.25

#### **Interject**

as defined in FC-FG.

### 3.1.26

#### **intermix**

as defined in FC-FG.

### 3.1.27

#### **Inter-Switch Link**

a Link connecting the E\_Port of one (local) Switch to the E\_Port of another (remote) Switch.

### 3.1.28

#### **Isolated**

a condition in which it has been determined that no Class N traffic may be transmitted across an ISL.

### 3.1.29

#### **L\_Port**

a port which contains Arbitrated Loop functions associated with the Arbitrated Loop topology.

### 3.1.30

#### **Link**

as defined in FC-PH.

### 3.1.31

#### **local Switch**

a Switch that can be reached without traversing any Inter-Switch Links.

### 3.1.32

#### **loop Fabric Address**

an address identifier used to address a loop for purposes of loop management.

### 3.1.33

#### **N\_Port**

as defined in FC-PH (see reference [1]). In this Standard, an N\_Port is assumed to always refer to a direct Fabric-attached port, and does not include NL\_Ports.

### 3.1.34

#### **N\_Port Identifier**

an address identifier assigned to an N\_Port.

### 3.1.35

#### **Name\_Identifier**

as defined in FC-PH (see reference [1]), a 64-bit identifier.

### 3.1.36

#### **NL\_Port**

an L\_Port which is able to perform the function of an N\_Port, attached via a link to one or more NL\_Ports and zero or more FL\_Ports in an Arbitrated Loop topology. In this Standard, an NL\_Port is assumed to always refer to a loop-attached port, and does not include N\_Ports.

**3.1.37****non-zero Domain\_ID\_List**

a Domain\_ID\_List which contains at least one record.

**3.1.38****Nx\_Port**

a Port operating as an N\_Port or NL\_Port.

**3.1.39****path**

a route between a source and a destination.

**3.1.40****path selection**

a process whereby a path between a source and one or more destinations is discovered.

**3.1.41****port**

1. A generic reference to an N\_Port, NL\_Port, F\_Port, FL\_Port, or E\_Port.

2. As defined in FC-FG (see reference [5]), the lowest level in a three-level addressing hierarchy.

**3.1.42****Port Identifier**

as defined in FC-FG (see reference [5]), bits 7 through 0 of an address identifier.

**3.1.43****port Mode**

a generic reference to E\_Port, F\_Port or FL\_Port operation.

**3.1.44****preferred Domain\_ID**

a Domain\_ID previously granted to a Switch by the Domain Address Manager.

**3.1.45****principal ISL**

an Inter-Switch Link that is used to communicate with the Principal Switch.

**3.1.46****principal Switch**

a Switch which has been selected to perform certain duties.

**3.1.47****remote Switch**

a Switch that can be reached only by traversing one or more Inter-Switch Links.

**3.1.48****Resource\_Allocation\_Timeout value**

a time constant defined in FC-PH. In this Standard, the recommended value of this time constant is 10 seconds.

**3.1.49****router**

an entity within a Switch responsible for routing of Class 2 and Class 3 frames.

**3.1.50****routing**

a process whereby the appropriate Switch Port(s) to deliver a Class 2 or Class 3 frame towards its destination is identified.

### 3.1.51

#### **switch**

1. A Fabric Element conforming to this Standard. 2. A member of the Fabric collective.

### 3.1.52

#### **switch Construct**

an entity within a Switch responsible for transporting frames between Switch Ports.

### 3.1.53

#### **Switch\_Name**

a Name\_Identifier which identifies a Switch for identification purposes. The format of the name is specified in FC-PH. Each Switch shall provide a unique Switch\_Name within the Fabric.

### 3.1.54

#### **switch Port**

an E\_Port, F\_Port, or FL\_Port.

### 3.1.55

#### **Switch\_Priority**

a value used during Principal Switch selection to cause one Switch to be favored over another.

### 3.1.56

#### **upstream Principal ISL**

the upstream Principal ISL is the Principal ISL to which frames may be sent from the local Switch to the Principal Switch. A Switch that is not the Principal Switch always has exactly one upstream Principal ISL. The Principal Switch does not have an upstream Principal ISL.

### 3.1.57

#### **zero Domain\_ID\_List**

a Domain\_ID\_List which is empty.

## 3.2 Editorial conventions

In this Standard, a number of conditions, mechanisms, sequences, parameters, events, states, or similar terms that do not have their normal English meaning are printed with the following conventions:

- the first letter of each word in uppercase and the rest lowercase (e.g., Exchange, Class, etc.).
- a term consisting of multiple words, with the first letter of each word in uppercase and the rest lowercase, and each word separated from the other by an underscore (\_) character. A word may consist of an acronym or abbreviation which would be printed in uppercase. (e.g., NL\_Port, Transfer\_Length, etc.).
- a term consisting of multiple words with all letters lowercase and each word separated from the other by a dash (-) character. A word may also consist of an acronym or abbreviation which would be printed in uppercase. (e.g., device-level, CUE-with-busy, etc.).

All terms and words not conforming to the conventions noted above have the normal technical English meanings.

Numbered items in this Standard do not represent any priority. Any priority is explicitly indicated.

In all of the figures, tables, and text of this Standard, the most significant bit of a binary quantity is the left side of the bit string. Exceptions to this convention are indicated in the appropriate sections.

The term “shall” is used to indicate a mandatory rule. If such a rule is not followed, the results are unpredictable unless indicated otherwise.

The fields or control bits which are not applicable shall be reset to zero.



If a field or a control bit in a frame is specified as not meaningful, the entity which receives the frame shall not check that field or control bit.

If a field or control bit is specified as reserved, it shall be filled with binary zeros by the source, and shall be ignored by the destination.

### 3.2.1 Binary notation

Binary notation may be used to represent some fields. Single bit fields are represented using the binary values 0 and 1. For multiple bit fields, the binary value is enclosed in single quotation marks followed by the letter b. For example, a four-byte Process\_Associator field containing a binary value may be represented as '00000000 11111111 10011000 11111010'b.

### 3.2.2 Hexadecimal notation

Hexadecimal notation may be used to represent some fields. When this is done, the value is enclosed in single quotation marks and preceded by the word hex. For example, a four-byte Process\_Associator field containing a binary value of '00000000 11111111 10011000 11111010'b is shown in hexadecimal format as hex'00 FF 98 FA'.

## 3.3 Abbreviations, acronyms, and symbols

Abbreviations and acronyms applicable to this International Standard are listed. Definitions of several of these items are included in 3.1. Abbreviations used that are not listed below are defined in FC-PH (see reference [1]).

### 3.3.1 Acronyms and abbreviations

<b>Area_ID</b>	Area Identifier
<b>BLS</b>	Basic Link Service
<b>Domain_ID</b>	Domain Identifier
<b>E_D_TOV</b>	Error_Detect_Timeout value
<b>ELS</b>	Extended Link Service
<b>FAN</b>	Fabric Address Notification Extended Link Service
<b>FC-AL</b>	Fibre Channel Arbitrated Loop
<b>FC-AL-2</b>	Fibre Channel Arbitrated Loop-2
<b>FC-BB</b>	Fibre Channel Backbone
<b>FC-FG</b>	Fibre Channel - Generic Fabric Requirements
<b>FC-FLA</b>	Fibre Channel - Fabric Loop Attachment
<b>FC-GS-2</b>	Fibre Channel - Generic Services-2
<b>FC-PH</b>	Fibre Channel Physical and Signaling Interface
<b>FC-PH-2</b>	Fibre Channel Physical and Signaling Interface-2
<b>FC-PH-3</b>	Fibre Channel Physical and Signaling Interface-3
<b>F_S_TOV</b>	Fabric_Stability_Timeout value
<b>ISL</b>	Inter-Switch Link
<b>IU</b>	Information Unit
<b>LAN</b>	Local Area Network
<b>LFA</b>	Loop Fabric Address
<b>Port_ID</b>	Port Identifier
<b>R</b>	Reserved
<b>R_A_TOV</b>	Resource_Allocation_Timeout value
<b>SI</b>	Sequence Initiative
<b>SW_ACC</b>	Switch Fabric Link Service Accept
<b>SW_LS</b>	Switch Fabric Link Service
<b>SW_RJT</b>	Switch Fabric Link Service Reject
<b>ULP</b>	Upper Level Protocol
<b>WKA</b>	Well-Known Address
<b>WWN</b>	World Wide Name

### 3.3.2 Symbol

Unless indicated otherwise, the following symbol has the listed meaning.

|| concatenation

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000


## 4 Structure and Concepts

### 4.1 Fabric

A Fabric is a transport facility that provides switched interconnect between Nx\_Ports. The general model of a Fibre Channel Fabric is defined in FC-FG, reference [5].

### 4.2 Switch

A Switch is the smallest entity that can function as a Switch-based Fibre Channel Fabric. Figure 1 illustrates the conceptual model of a Switch.

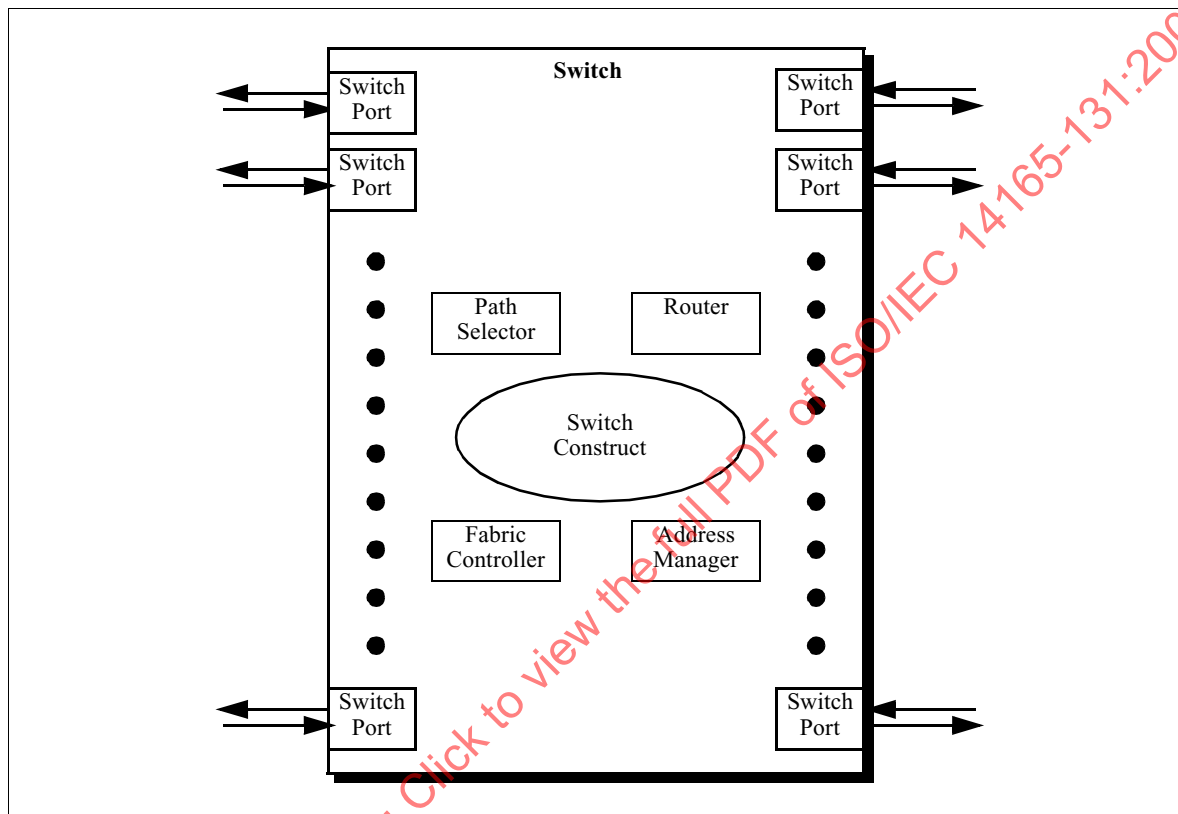

**Figure 1 – Switch Model**

A Switch is composed of the following major components:


- One or more Switch Ports;
- a Switch Construct, capable of either multiplexed frame switching or circuit switching, or both;
- an Address Manager;
- a Path Selector, which performs path selection;
- a Router;
- and a Fabric Controller.

A Switch Port may be either an E\_Port, an F\_Port, or an FL\_Port. A Switch Port that is capable of assuming more than one of these roles is called a multi-function Switch Port. Once a Switch Port assumes a role, via the Switch Port Initialization Procedure, it shall remain in that role until an event occurs that causes re-initialization.

The Link joining a pair of E\_Ports is called an Inter-Switch Link (ISL). E\_Ports conforming to this Standard use FC-PH compliant media, coding and data rates to form an ISL.

ISLs carry frames originating from the Node Ports and those generated within the Fabric. The frames generated within the Fabric serve as control, management and support for the Fabric.

Switches may be joined freely or in a structured fashion to form a larger Fabric, as illustrated in Figure 2

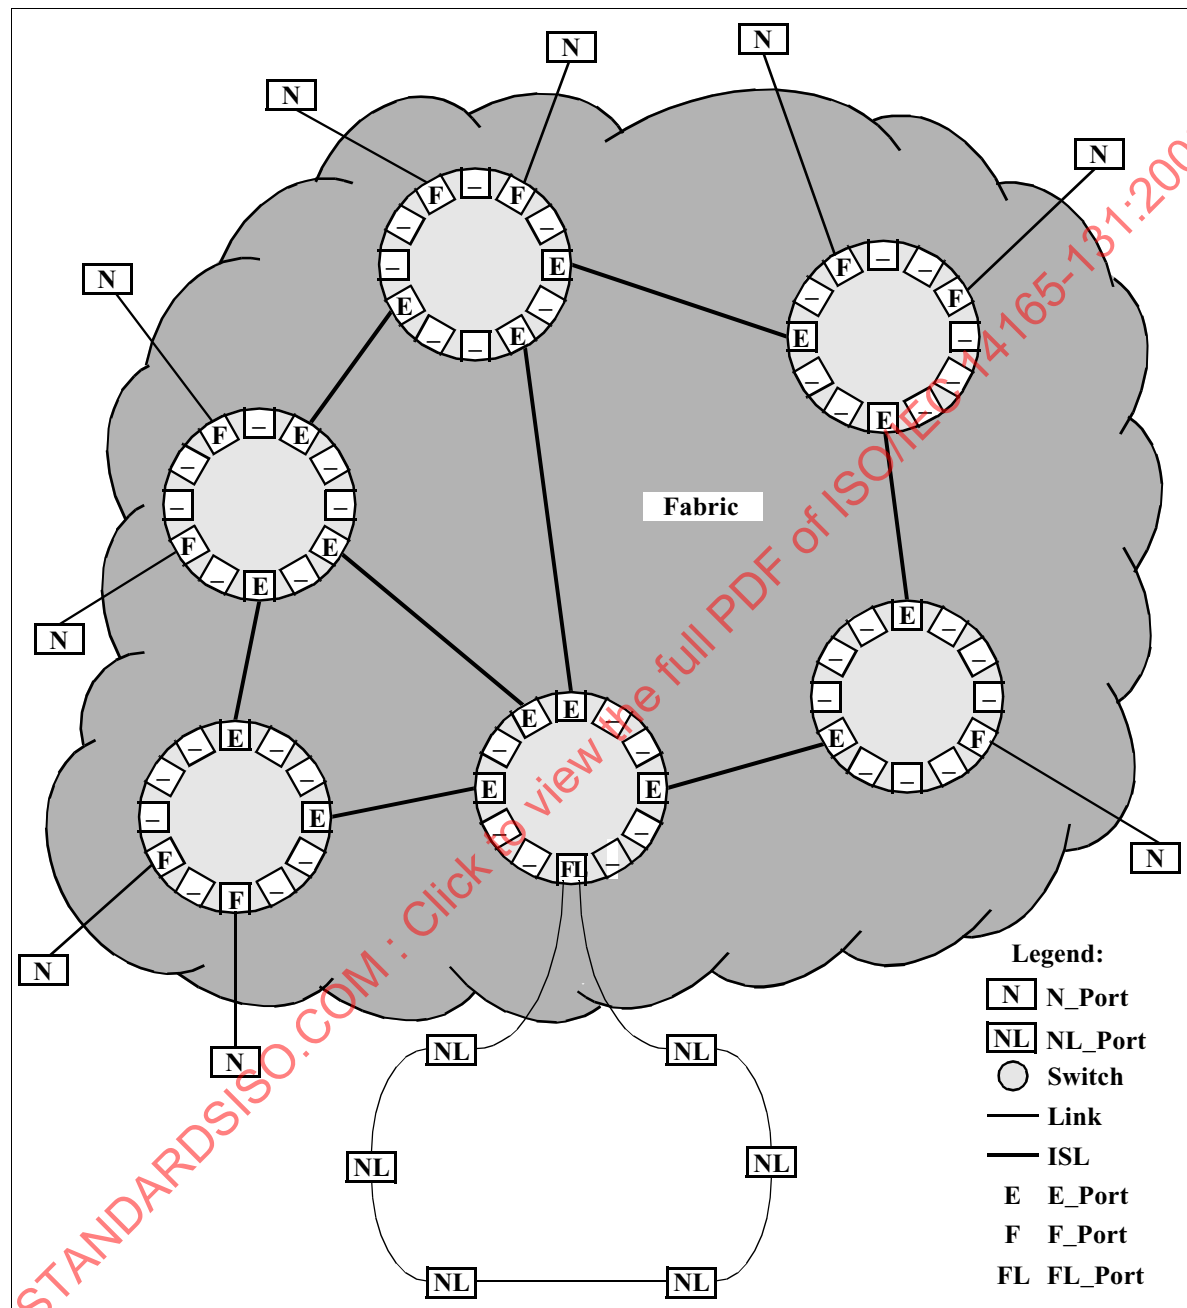

**Figure 2 – Multiple Switch Fabric Example**

The structure of the Switch Construct in the Switch, as seen in figure 1, is undefined and beyond the scope of this Standard. It may support either or both circuit switching and multiplexed frame switching. It may be non-blocking, allowing concurrent operation of all possible combinations or it may be blocking, restricting operations. The Switch Construct may also contain redundancy, as may be required for high availability configurations.

The Address Manager is responsible for the assignment of addresses within some portion of the Fabric. Within the Switch, the Address Manager is responsible for acquiring a Domain and Area for the Switch, and allocating Port\_IDs within the Domain and Area.

The Path Selector is a logical entity that establishes frame routing paths.

The Router is a logical entity that performs the routing of Class 2 and Class 3 frames to their final destination.

The Fabric Controller is a logical entity that performs the management of the Switch. The Fabric Controller has the characteristics of an N\_Port, though it may or may not be attached to the Fabric via a Link.

### 4.3 Switch Topologies

Switch topologies are defined in FC-FG, reference [5].

### 4.4 Switching characteristics

Path and circuit switching, and frame routing within a Switch may occur synchronously or asynchronously to the current word alignment of the outbound fibre.

Synchronous switching guarantees retention of the established word alignment on the outbound fibre of the Switch Port. Asynchronous switching does not guarantee retention of word alignment on the outbound fibre of the Switch Port.

A Switch may employ either synchronous or asynchronous switching or a combination of the two (e.g., a Switch may use synchronous switching for Class F, Class 2 and Class 3, and asynchronous switching for Class 1). However, a Switch shall never mix the two within a given Class of Service.

A switching event occurs every time a connectionless frame is transmitted and when a connection based service is established, suspended or terminated. Frame Intermixing and Interjecting also constitute switching events.

#### 4.4.1 Synchronous switching

Synchronous switching associated with connectionless frame routing and connection oriented Dedicated Connections or virtual connection Services shall guarantee the word alignment on the outbound fibre.

Switches shall ensure that synchronous switching only occurs between frames. Switches should use synchronous switching in support of Class 2, Class 3 and Class F service.

#### 4.4.2 Asynchronous switching

Asynchronous switching may be performed any time Fill Words are being transmitted. Bit alignment and word alignment may be lost when an asynchronous switching event occurs. A recovery time that allows the attached Port time to regain synchronization shall be inserted before frame transmission resumes for the outbound fibre. Fill Words shall be transmitted during this recovery time. If conditions arise warranting transmission of a Primitive Sequence, then this should take precedence over transmission of Fill Words.

If a Switch or Node Port recognizes that it is linked to a Switch which employ asynchronous switching, and a permissible word realignment event occurs, then the Port may discount any resulting errors, i.e. not log errors resulting from the realignment event.

### 4.5 Switch Ports

A Switch shall have three or more Switch Ports. A Switch equipped only with F\_Ports or FL\_Ports forms a non-expandable Fabric. To be part of an expandable Fabric, a Switch shall incorporate at least one Switch Port capable of E\_Port operation.

A Switch Port supports one or more of the following Port Modes: E\_Port, F\_Port, FL\_Port. A Switch Port that is capable of supporting more than one Port Mode attempts to configure itself first as an FL\_Port (as defined in FC-AL), then as an E\_Port (as defined in this Standard), and finally as an F\_Port (as defined in FC-PH), depending on which of the three Port Modes are supported by the Switch Port.

The detailed procedure is described in 7.2.

#### 4.5.1 F Port

An F\_Port is the point at which all frames originated by an N\_Port enter the Fabric, and all frames destined for an N\_Port exit the Fabric. An F\_Port may also be the Fabric entry point for frames originated by an N\_Port destined for an internal Fabric destination, such as the Fabric Controller. Similarly, an F\_Port may also be the Fabric exit point for frames originated internal to the Fabric and destined for an N\_Port. Frames shall not be communicated across a Link between an F Port and anything other than an N Port.

F Ports are described in detail in 5.3.

### 4.5.2 FL Port

An FL\_Port is the point at which all frames originated by an NL\_Port enter the Fabric, and all frames destined for an NL\_Port exit the Fabric. An FL\_Port may also be the Fabric entry point for frames originated by an NL\_Port destined for an internal Fabric destination, such as the Fabric Controller. Similarly, an FL\_Port may also be the Fabric exit point for frames originated internal to the Fabric and destined for an NL\_Port. Frames shall not be communicated across a Link between an FL\_Port and anything other than an NL\_Port.

FL Ports are described in detail in 5.4.

### 4.5.3 E Port

An E\_Port is the point at which frames pass between the Switches within the Fabric. Frames with a destination other than the local Switch or any N\_Port or NL\_Port attached to the local Switch exit the local Switch through an E\_Port. Frames that enter a Switch via an E\_Port are forwarded to a local destination, or are forwarded towards their ultimate destination via another E\_Port. Frames shall not be communicated across a Link between an E\_Port and anything other than an E\_Port.

E Ports are described in detail in 5.5.

## 4.6 Fabric Addressing

Switches use the address partitioning model described in FC-FG (Annex A), and as described below. The 24-bit address identifier is divided into three fields: Domain, Area, and Port, as shown in figure 3.

2	2	2	2	1	1	1	1	1	1	1	1	1	1	9	8	7	6	5	4	3	2	1	0
3	2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1	0
Domain_ID								Area_ID								Port_ID							
Address Identifier																							

### Figure 3 – Domain, Area, and Port Address Partitioning

A Domain is one or more Switches that have the same Domain\_ID for all N\_Ports and NL\_Ports within or attached to those Switches, except for Well-Known Addresses. If there is more than one Switch in the Domain, any Switch within the Domain shall be directly connected via an ISL to at least one other Switch in the same Domain.

An Area ID shall apply to either of the following:

- One or more N\_Ports or E\_Ports within and attached to a single Switch, except for Well-Known Addresses; or,
- an Arbitrated Loop of NL Ports attached to a single FL Port.

A single Arbitrated Loop shall have exactly one Area ID.

A Port\_ID shall apply to either of the following:

- a single N\_Port or E\_Port within a Domain/Area, except for Well-Known Addresses; or,
- the valid AL\_PA of a single NL\_Port or FL\_Port on an Arbitrated Loop.

Address identifier values for this Standard are listed in table 1. Any value listed as Reserved is not meaningful within this Standard. Note also that some values defined below are different from the address allocations defined in Informative Annex A of FC-FG; these differences are noted in the table.

**Table 1 – Address Identifier Values**

Address Identifier (hex)			Description
Domain_ID	Area_ID	Port_ID	
00	00	00	Undefined (note 1)
00	00	AL_PA	E_Port: Reserved F_Port: Reserved FL_Port: Private Loop NL_Port (note 2)
00	00	non-AL_PA	Reserved
00	01 - FF	00 - FF	Reserved
01 - EF	00 - FF	00	E_Port: E_Port Identifier (note 4) F_Port: N_Port Identifier (note 4) FL_Port: Loop Fabric Address (note 3)
01 - EF	00 - FF	AL_PA	E_Port: E_Port Identifier (note 4) F_Port: N_Port Identifier (note 4) FL_Port: N_Port Identifier for Public Loop NL_Port (note 3)
01 - EF	00 - FF	non-AL_PA	E_Port: E_Port Identifier (note 4) F_Port: N_Port Identifier (note 4) FL_Port: Reserved
F0 - FE	00 - FF	00 - FF	Reserved
FF	00 - FA	00 - FF	Reserved
FF	FB	00 - FF	Reserved for Multicast Group_ID (note 5)
FF	FC	00	Reserved (note 5)
FF	FC	01 - EF	N_Port Identifier for Domain Controller (note 6)
FF	FC	F0 - FF	Reserved (note 5)
FF	FD - FE	00 - FF	Reserved (note 5)
FF	FF	00 - EF	Reserved (note 5)
FF	FF	F0 - FC	Well-Known Address (note 7)

**Table 1 – Address Identifier Values**

Address Identifier (hex)			Description
Domain_ID	Area_ID	Port_ID	
FF	FF	FD	N_Port Identifier for Fabric Controller (note 8)
FF	FF	FE	N_Port Identifier for Fabric F_Port
FF	FF	FF	Well-Known Address (note 7)
<p>Notes:</p> <ol style="list-style-type: none"> <li>1 This value is used by an N_Port requesting an address identifier during FLOGI.</li> <li>2 See FC-AL for a definition of AL_PA and FC-FLA for a definition of Private Loop and FL_Port operation with Private Loop devices. In FC-FG, this range was reserved for other purposes.</li> <li>3 See FC-FLA for the definition and use of Loop Fabric Address, and for a definition of Public Loop.</li> <li>4 In FC-FG, the Area_ID range F0-FF was reserved for “Fabric Assisted Functions”, which were not defined in FC-FG.</li> <li>5 In FC-FG, this range was reserved for other purposes.</li> <li>6 A Domain Controller identifier may be used to address the Fabric Controller of a remote Switch that is not directly connected via an ISL to the originating Switch. The Port_ID field is set to the Domain_ID of the remote Switch.</li> <li>7 The usage of Well-Known Addresses hex’FFFFFF0’ through hex’FFFFFFC’, and hex’FFFFFFF’, are not defined by this Standard. FC-PH defines or reserves these values for Well-Known Addresses.</li> <li>8 This address identifier has special usage depending on the originator. If the originator is an attached external N_Port or NL_Port (attached via an F_Port or FL_Port) then the destination of a frame sent to hex’FFFFFFD’ is the Fabric Controller of the local Switch. If the originator is the Fabric Controller of the local Switch, then the destination of a frame sent to hex’FFFFFFD’ via an ISL is the Fabric Controller of the remote Switch at the other end of the ISL.</li> </ol>			

#### 4.7 Class F Service

Class F service is a connectionless service very similar to Class 2 that is used for internal control of the Fabric. Class F service as defined by this Standard differs in some ways from the definition in FC-FG. Class F service as used by this Standard is defined in 5.6.

#### 4.8 Relationship Between this Standard and FC-FG

FC-FG defines the generic requirements for all Fabrics, independent of the specific type or topology. Many issues are appropriately left open for definition by later Fabric Standards specific to certain types and topologies.

In the process of defining the Switch Fabric, some items that were defined in FC-FG were found that required modification for use in this Standard.

In case where the items defined in this Standard conflict with those defined in FC-FG, the definitions of this Standard shall take precedence.



## 5 Switch Ports

### 5.1 General Model

Note that the models described below are defined for purposes of describing behavior. No implication is made as to whether the actual implementation of an element is in hardware or software. An element may be implemented on a per-Port basis, or may be a logical entity that is embodied in a single physical implementation shared by multiple ports.

A Switch Port may be able to operate in more than one mode, and configure itself to the appropriate mode during the initialization process (see 7.2). During initialization, the Switch Port can assume a mode for purposes of determining if that mode is appropriate. For example, a Switch Port operates in FL\_Port mode to determine if it is attached to a loop of NL\_Ports. If that is not successful, it then tries operating as an E\_Port to see if another E\_Port is attached. The Switch Port continues until it finds a mode in which to operate.

### 5.2 Model elements

Each Switch Port model described in this clause is made up of a set of elements. These elements are briefly defined below.

#### 5.2.1 FC Transports

The FC-PH Transport includes all of the functionality described in FC-PH to construct and deconstruct a frame, to encode and decode the words that make up the frame, and to transmit and receive the frame on the physical media. The FC-AL Transport contains additional functionality to support the Arbitrated Loop protocols.

#### 5.2.2 Switch Transport

The Switch Transport is an abstraction to show the “back end” of the Switch Port as it interacts with the Switch Construct and/or other Switch Ports within the Switch. The Switch Transport exists to move frames between the Switch Port and the rest of the Switch. No other implementation details are implied by this element.

#### 5.2.3 Control Facilities

The Control Facilities are internal logical ports that receive and perform requests, and generate responses. Each Control Facility has associated with it an address identifier, and support for Classes of Service. The Control Facilities also manage the various Transport elements.

#### 5.2.4 Link Services

The Link Services represent the various Link Services that are supported by the corresponding Control Facility.

### 5.3 F\_Port Operation

An F\_Port is the point at which an external N\_Port is attached to the Fabric. It normally functions as a conduit to the Fabric for frames transmitted by the N\_Port, and as a conduit from the Fabric for frames destined for the N\_Port.

An F\_Port shall support one or more of the following Classes of service: Class 1 service, Class 2 service, Class 3 service. An F\_Port shall not intentionally transmit Class F frames on its outbound fibre.

NOTE – When a Class 1 Connection is ended, a Class F frame may be inadvertently transmitted by an F\_Port. An N\_Port that receives a Class F frame discards it, as required by FC-PH.

An F\_Port shall not admit to the Fabric any Class F frames, any Primitive Sequences, or any Primitive Signals other than Idle, that the F\_Port receives on its inbound fibre.

NOTE – Primitive Signals and Primitive Sequences are prohibited from entering the Fabric by FC-PH. For example, if an R\_RDY was admitted to a Fabric, it could presumably propagate to another F\_Port and be transmitted by that F\_Port, disrupting credit on that Link.

### 5.3.1 Model

The model of an F\_Port is shown in figure 4.

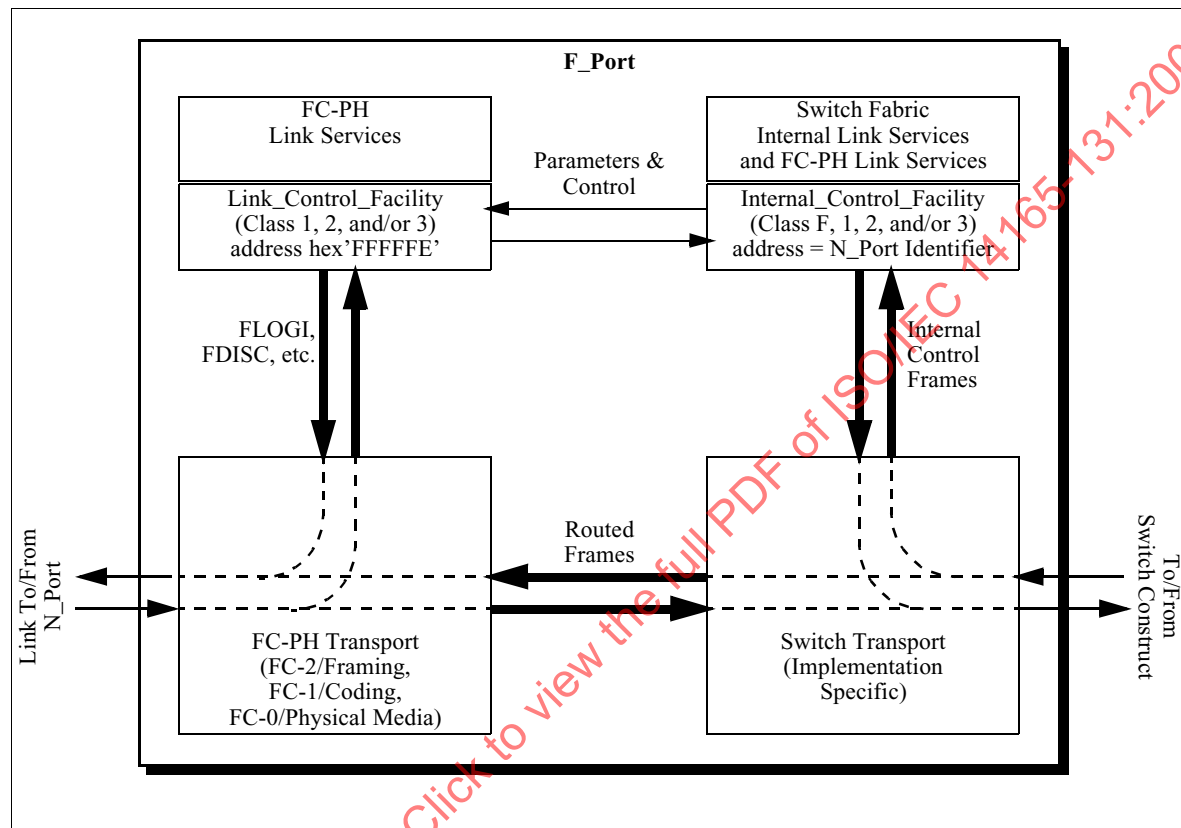


Figure 4 – F\_Port Model

An F\_Port contains an FC-PH Transport element through which passes all frames and Primitives transferred across the Link to and from the N\_Port. Frames received from the N\_Port are either directed to the Switch Construct via the Switch Transport element, or directed to the Link\_Control\_Facility. The Link\_Control\_Facility receives frames related to Link Services such as FLOGI, and transmits responses to those Link Service frames.

Frames received from the FC-PH Transport element that are destined for other ports are directed by the Switch Transport to the Switch Construct for further routing. Frames received from the Switch Construct by the Switch Transport are directed either to the FC-PH Transport for transmission to the N\_Port, or to the Internal\_Control\_Facility. The Internal\_Control\_Facility receives frames related to Switch Fabric Internal Link Services, and transmits responses to those Internal Link Services frames. Information is passed between the Internal\_Control\_Facility and the Link\_Control\_Facility to effect the control and configuration of the Transport elements.

### 5.3.2 Link Behavior

The F\_Port Link is used by Switches to transmit and receive frames with a single Node. A Link to an F\_Port always connects to exactly one N\_Port.

An F\_Port Link follows the FC-0, FC-1, and FC-2 protocols defined for point-to-point Links as defined in FC-PH.

## 5.4 FL\_Port Operation

An FL\_Port is the point at which one or more external NL\_Ports are attached to the Fabric. It normally functions as a conduit to the Fabric for frames transmitted by the attached NL\_Ports, and as a conduit from the Fabric for frames destined for the attached NL\_Ports.

An FL\_Port shall support one or more of the following Classes of service: Class 1 service, Class 2 service, Class 3 service. An FL\_Port shall not intentionally transmit Class F frames on its outbound fibre. An FL\_Port shall not admit to the Fabric any Class F frames, any Primitive Sequences, or any Primitive Signals other than Idle, that the FL\_Port receives on its inbound fibre.

An FL\_Port that conforms to this Standard shall conform to the FL\_Port requirements defined in FC-FLA.

### 5.4.1 Model

The model of an FL\_Port is shown in figure 5.

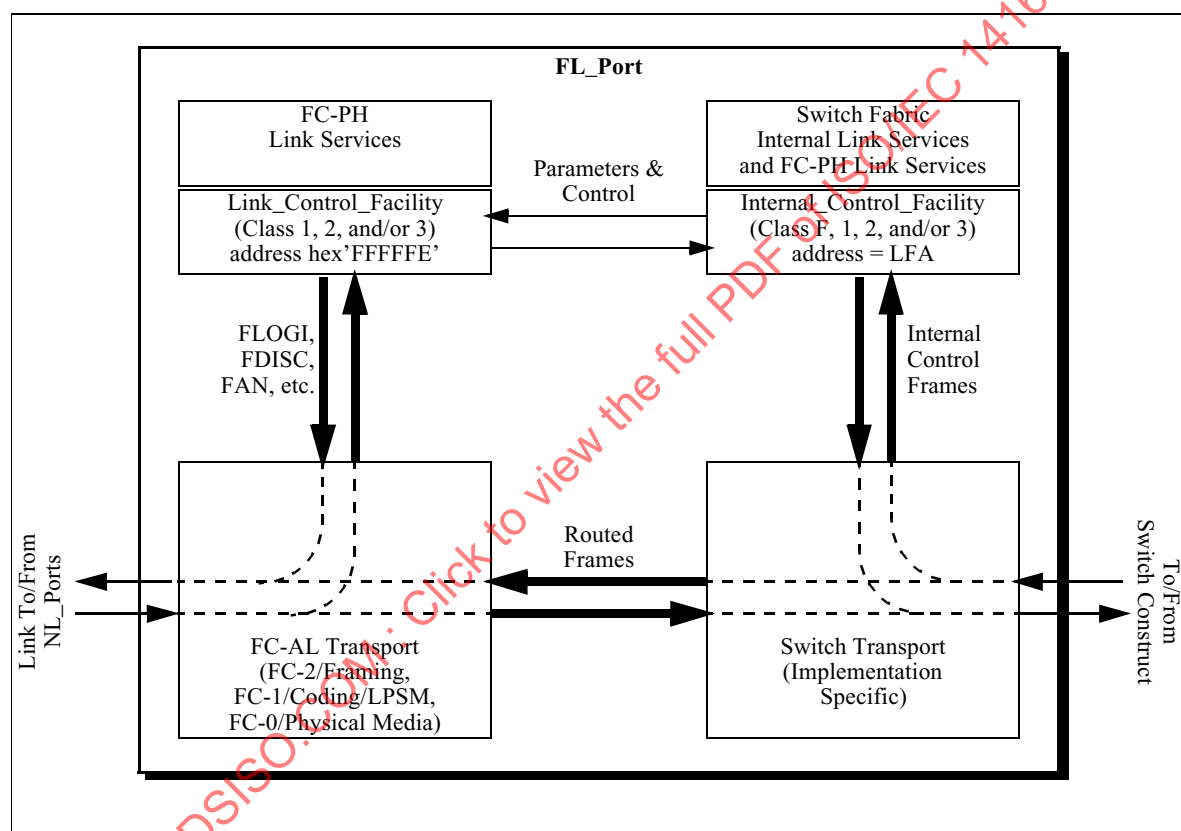


Figure 5 – FL\_Port Model

An FL\_Port contains an FC-AL Transport element through which passes all frames and Primitives transferred across the Link to and from the multiple NL\_Ports. Frames received from the NL\_Ports are either directed to the Switch Construct via the Switch Transport element, or directed to the Link\_Control\_Facility. The Link\_Control\_Facility receives frames related to Link Services such as FLOGI, and transmits responses to those Link Service frames. The Link\_Control\_Facility also transmits and receives Loop Initialization Sequences and transmits the FAN ELS.

Frames received from the FC-AL Transport element that are destined for other ports are directed by the Switch Transport to the Switch Construct for further routing. Frames received from the Switch Construct by the Switch Transport are directed either to the FC-AL Transport for transmission to the destination NL\_Port, or to the Internal\_Control\_Facility. The Internal\_Control\_Facility receives frames related to Switch Fabric Internal Link Services and Loop management Extended Link Services (see FC-FLA), and transmits responses to those Link Services frames. Information is passed between the Internal\_Control\_Facility and the Link\_Control\_Facility to effect the control and configuration of the Transport elements.

### 5.4.2 Link Behavior

The FL\_Port Link is used by Switches to transmit and receive frames with multiple Nodes. A Link to an FL\_Port connects to one or more NL\_Ports.

An FL\_Port Link follows the FC-0, FC-1, and FC-2 protocols defined in FC-PH, with the additional Arbitrated Loop protocols defined in FC-AL.

## 5.5 E\_Port Operation

An E\_Port is the point at which a Switch is connected to another Switch to create a Fabric. It normally functions as a conduit between the Switches for frames destined for remote N\_Ports and NL\_Ports. An E\_Port is also used to carry frames between Switches for purposes of configuring and maintaining the Fabric.

An E\_Port shall support the Class F service. An E\_Port shall also be capable of routing one or more of the following Classes of service: Class 1 service, Class 2 service, Class 3 service. An E\_Port shall not admit to the Fabric any Primitive Sequences, or any Primitive Signals other than Idle, that the E\_Port receives on its inbound fibre.

### 5.5.1 Model

The model of an E\_Port is shown in figure 6.

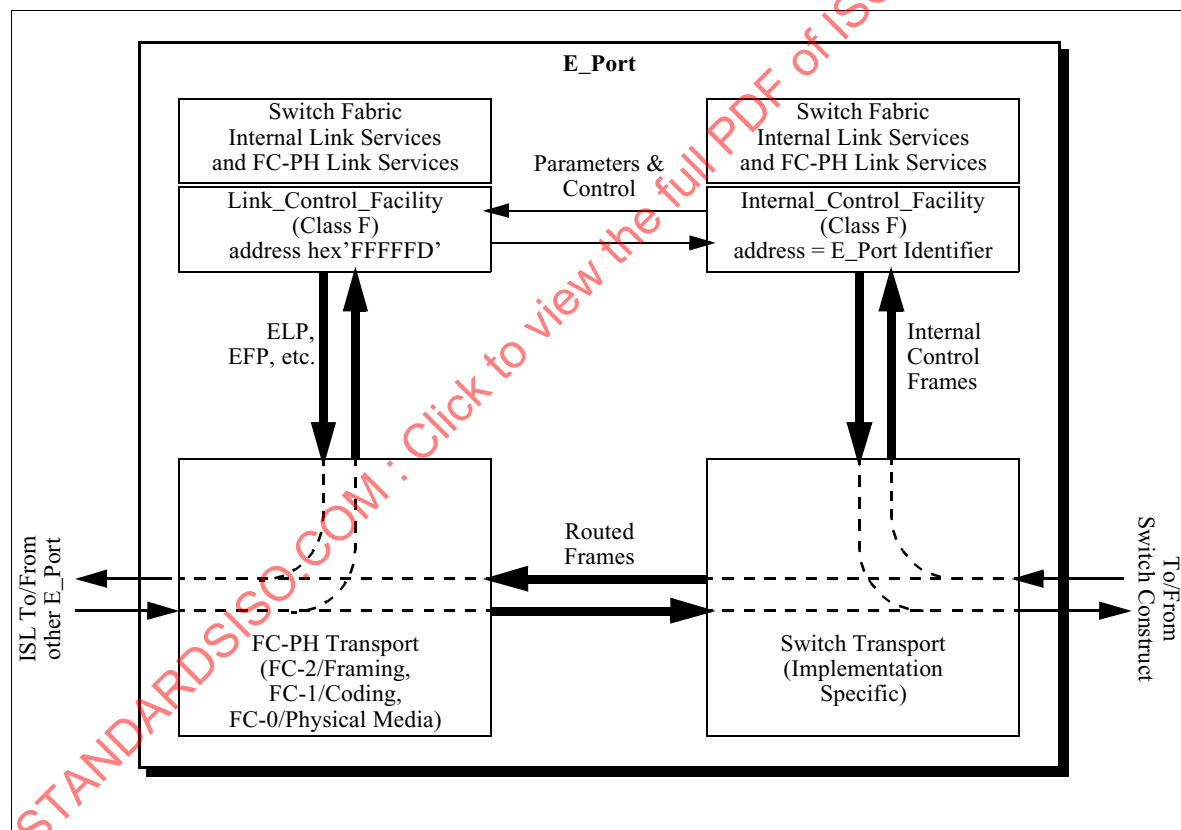


Figure 6 – E\_Port Model

An E\_Port contains an FC-PH Transport element through which passes all frames and Primitives transferred across the Link to and from the other E\_Port. Frames received from the other E\_Port are either directed to the Switch Construct via the Switch Transport element, or directed to the Link\_Control\_Facility. The Link\_Control\_Facility receives frames related to Switch Fabric Internal Link Services such as ELP, and transmits responses to those Link Service frames.

Frames received from the FC-PH Transport element that are destined for other ports are directed by the Switch Transport to the Switch Construct for further routing. Frames received from the Switch Construct by the Switch Transport are directed either to the FC-PH Transport for transmission to the other E\_Port, or to the Internal\_Control\_Facility. The Internal\_Control\_Facility receives frames related to Switch Fabric Internal

Link Services, and transmits responses to those Internal Link Services frames. Information is passed between the Internal\_Control\_Facility and the Link\_Control\_Facility to effect the control and configuration of the Transport elements.

### 5.5.2 Inter-Switch Link Behavior

Inter-Switch Links (ISLs) are used by Switches to transmit and receive frames with other Switches. An ISL always connects exactly one E\_Port on a Switch to exactly one E\_Port on another Switch.

An ISL follows the FC-0, FC-1, and FC-2 protocols defined for point-to-point Links as defined in FC-PH, with the exception that Class F frames are allowed to transit the Link, as defined in FC-FG. The use of R\_RDY shall be restricted to the management of buffer-to-buffer flow control of Class F frames on the ISL prior to the completion of the exchange of Link parameters (see 6.1.3 and 7.2); an alternate method of buffer-to-buffer flow control may be defined in that process. Flow control of Class N frames shall be managed by other means not defined in this Standard.

NOTE – It is expected that the various flow control models will be defined by a future standard.

For purposes of defining and maintaining the Fabric Configuration, an ISL may be designated as a Principal ISL. The Principal ISL is a path that is used during configuration and address assignment to route Class F configuration frames, and is therefore a known path between two Switches. If a Principal ISL is lost, there may be no other available paths between the two affected Switches, so as a result the Fabric Configuration is possibly broken and must be rebuilt (by issuing the BF SW\_ILS, see 6.1.7). If a non-Principal ISL is lost, at least one other path is known to be available between the Switches (i.e., the Principal ISL), therefore the lost ISL can be resolved via a routing change.

A Switch discovers the Principal ISL(s) during the process of Principal Switch Selection (see 7.3) and Address Distribution (see 7.4). During this process, the Switch identifies two kinds of Principal ISL. The Principal ISL that leads towards the Principal Switch is called the upstream Principal ISL. All frames from the Switch to the Principal Switch are sent via the upstream Principal ISL. The Principal Switch has no upstream Principal ISL; all other Switches have exactly one upstream Principal ISL.

A Principal ISL that leads away from the Principal Switch is called the downstream Principal ISL. Any frame sent by the Switch to another Switch as a result of a frame received on the upstream Principal ISL is sent via the downstream Principal ISL that leads towards that Switch. The Principal Switch may have one or more downstream Principal ISLs; all other Switches may have zero or more downstream Principal ISLs.

Principal ISLs are further illustrated in figure 7.

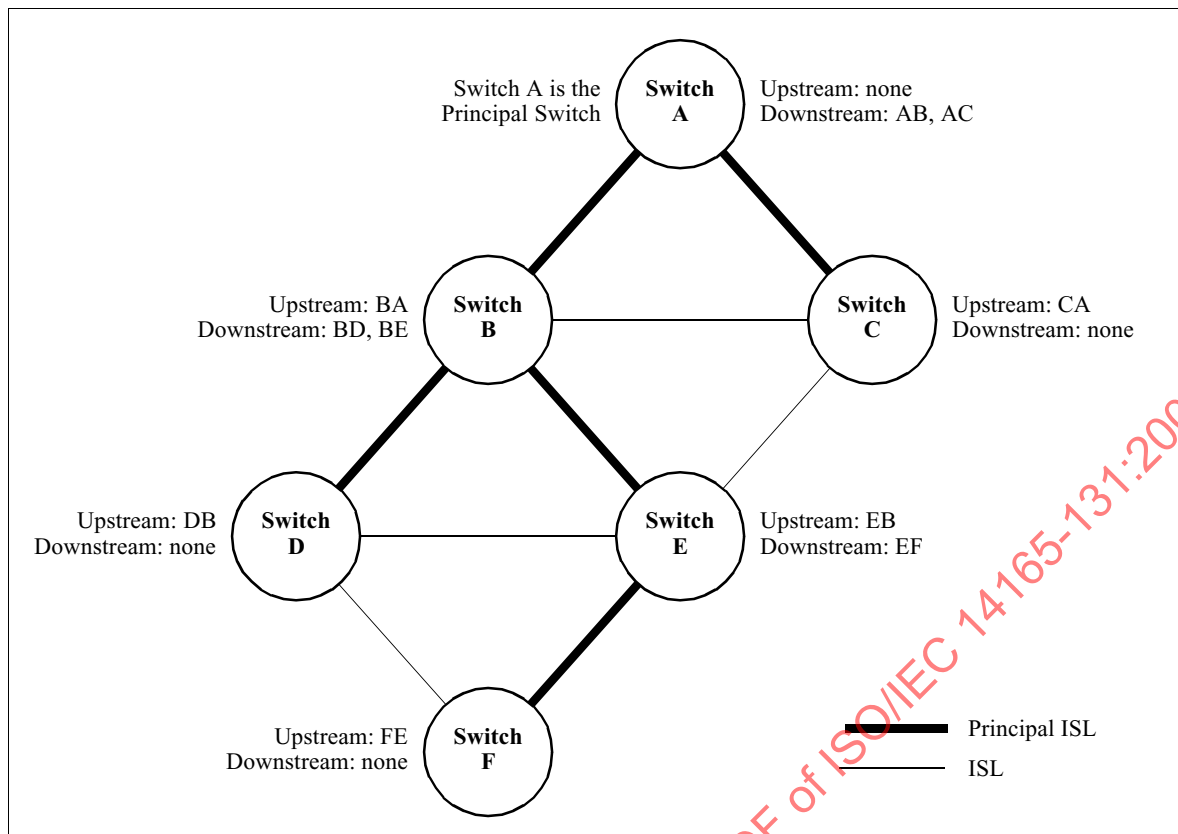


Figure 7 – Principal Inter-Switch Links

## 5.6 Class F Service

Class F Service is a connectionless service with notification of non-delivery between E\_Ports, used for control, coordination, and configuration of the Fabric. Class F Service is defined by this Standard for use by Switches communicating across Inter-Switch Links. This definition of Class F for Inter-Switch Links supersedes the definitions of Class F for Inter-Element Links in FC-FG.

### 5.6.1 Class F Function

A Class F Service is requested by an E\_Port on a frame by frame basis. The Fabric routes the frame to the destination E\_Port. If the E\_Port transmits consecutive frames to multiple destinations, the Fabric demultiplexes them to the requested destinations. Class F delimiters are used to indicate the requested service and to initiate and terminate one or more Sequences as described in FC-PH.

### 5.6.2 Class F Rules

To provide Class F Service, the transmitting and receiving E\_Ports and the Fabric shall obey the following rules:

- Except for some Switch Fabric Internal Link Service protocols, an E\_Port is required to have exchanged Link parameters (see 6.1.3 and 7.2) with the associated destination with which it intends to communicate (**Login**).
- The Fabric routes the frames without establishing a Dedicated Connection between communicating E\_Ports. To obtain Class F service, the E\_Port shall use Class F delimiters as defined in 5.6.3. (**Connectionless service**)
- An E\_Port is allowed to send consecutive frames to one or more destinations. This enables an E\_Port to demultiplex multiple Sequences to a single or multiple destinations concurrently. (**demultiplexing**)
- A given E\_Port may receive consecutive frames from different sources. Each source is allowed to send consecutive frames for one or more Sequences. (**multiplexing**)

- e) A destination E\_Port shall provide an acknowledgment to the source for each valid Data frame received. The destination E\_Port shall use ACK\_1 for the acknowledgment. If a Switch is unable to deliver the ACK\_1 frame, the Switch shall return an F\_BSY or F\_RJT. **(Acknowledgment)**
- f) The Sequence Initiator shall increment the SEQ\_CNT field of each successive frame transmitted within a Sequence. However, the Switches may not guarantee delivery to the destination in the same order of transmission. **(non-sequential delivery)**
- g) An E\_Port may originate multiple Exchanges and initiate multiple Sequences with one or more E\_Ports. The E\_Port originating an Exchange shall assign an X\_ID unique to the Originator called OX\_ID and the Responder of the Exchange shall assign an X\_ID unique to the responder called RX\_ID. The value of OX\_ID or RX\_ID is unique to a given E\_Port. The Sequence Initiator shall assign a SEQ\_ID, for each Sequence it initiates, which is unique to the Sequence Initiator and the respective Sequence Recipient pair while the Sequence is Open. **(concurrent Exchanges and Sequences)**
- h) Each E\_Port exercises buffer-to-buffer flow control with the E\_Port to which it is directly attached. End-to-end flow control is performed by communicating E\_Ports. ACK\_1 frames are used to perform end-to-end flow control and R\_RDY is used for buffer-to-buffer flow control. **(dual flow control)**
- i) If a Switch is unable to deliver the frame to the destination E\_Port, then the source is notified of each frame not delivered by an F\_BSY or F\_RJT frame with corresponding D\_ID, S\_ID, OX\_ID, RX\_ID, SEQ\_ID, and SEQ\_CNT from the Switch. The source is also notified of valid frames busied or rejected by the destination E\_Port by P\_BSY or P\_RJT. **(non-delivery)**
- j) A busy or reject may be issued by an intermediate E\_Port or the destination E\_Port with a valid reason code. **(busy/reject)**
- k) If a Class F Data frame is busied, the sender shall retransmit the busied frame up to the ability of the sender to retry, including zero. **(retransmit)**
- l) The Credit established during the ELP protocol by interchanging Link Parameters shall be honored. Class F shall not share Credit with any other Class of service. **(Credit)**
- m) Effective transfer rate between any given E\_Port pair is dependent upon the number of E\_Ports a given E\_Port is demultiplexing to and multiplexing from. **(bandwidth)**
- n) Frames within a Sequence are tracked on a Sequence\_Qualifier and SEQ\_CNT basis. **(tracking)**
- o) An E\_Port shall be able to recognize SOF delimiters for Class F, Class 1, Class 2, and Class 3 service, whether or not all Classes of service are supported by the Port. An E\_Port shall accept frames for all FC-PH service Classes. **(invalid Class)**
- p) An E\_Port receiving a Vendor Unique Class F frame may discard the frame without notification. A Vendor Unique Class F frame is indicated by an R\_CTL field value of hex'F0'. **(vendor unique)**
- q) An E\_Port shall support insertion of Class F frames onto an established Class 1 Dedicated Connection. However, this insertion shall not cause loss of any Class 1 frames. A Switch may abort (EOFa) or discard an Intermixed Class 2 or Class 3 frame in progress if its transmission of a Class F frame interferes. A Switch shall not abort an Inserted Class F frame. **(Class F intermix)**
- r) An E\_Port shall use R\_RDY and FC-PH buffer-to-buffer flow control with the E\_Port to which it is directly attached, until after the exchange of Link parameters (see 6.1.3 and 7.2). The BB\_Credit prior to the exchange of Link parameters shall be 1. E\_Ports may agree to use an alternate buffer-to-buffer credit model for Class F following the successful exchange of Link parameters. **(alternate credit models)**
- s) Since the SOF delimiter does not indicate whether a frame is the first frame of a Sequence, the starting SEQ\_CNT of every Sequence shall be zero. **(Sequence reassembly)**



### 5.6.3 Class F Frame Format

Class F frames shall use the Frame\_Header defined in Clause 18 of FC-PH. The Class F frame format is shown in figure 8. The Start\_of\_Frame Fabric (**SOFF**) delimiter shall precede the frame content of all Class F frames. The Data Field size of all Class F frames shall be less than or equal to 256 bytes prior to the successful completion of Exchange Link Parameters (see 6.1.3; Exchange Link Parameters establishes the maximum receive frame size for Class F frames). All Class F frames shall include the CRC defined in Clause 17 of FC-PH. The End\_of\_Frame Normal (**EOFn**) delimiter shall immediately follow the CRC of all normally completed Class F Data frames and all normally completed Class F Link\_Control frames except the last frame of a Sequence. The End\_of\_Frame Terminate (**EOFt**) delimiter shall immediately follow the CRC of all Class F Link\_Control frames that indicate the last frame of a Sequence which is normally terminated. A Class F frame is preceded and followed by Primitive Signals as defined in FC-PH.

An E\_Port or Switch may invalidate or discard without notification any incorrectly formed Class F frame, or any Class F frame with a code violation or CRC error.

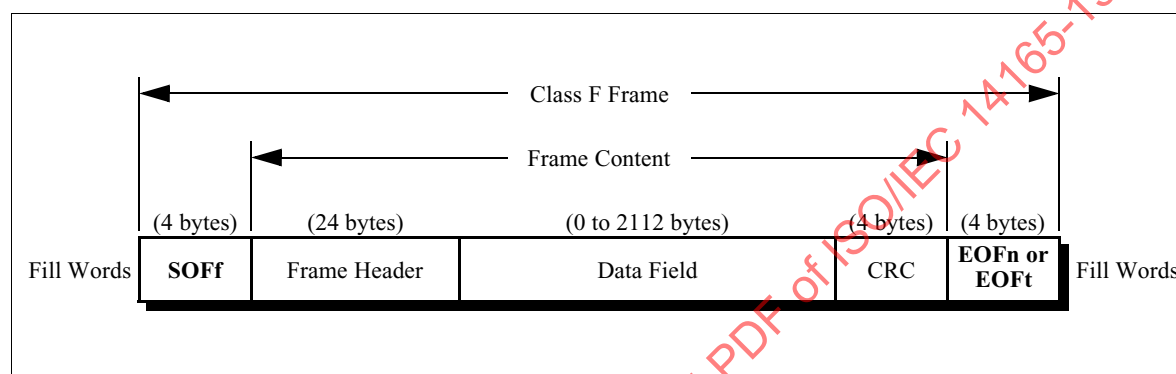


Figure 8 – Class F Frame Format

### 5.6.4 Class F Flow Control

Class F service uses both buffer-to-buffer and end-to-end flow controls. R\_RDY is used for buffer-to-buffer flow control. R\_RDY is transmitted by the E\_Port at one end of the ISL, to the E\_Port at the other end of the ISL, to indicate that a buffer is available for further frame reception by the first E\_Port. This process operates in both directions on the ISL.

ACK\_1 frames are used to perform end-to-end flow control. ACK\_1 frames shall begin with an **SOFF** delimiter. The ACK\_1 frame shall be terminated by an **EOFn** or **EOFt** delimiter. The ACK\_0 and ACK\_N Link Control frame shall not be used for Class F service.

After the successful exchange of Link Parameters, an alternate method of buffer-to-buffer flow control may be established on an ISL (see 7.2). This alternate method of buffer-to-buffer flow control remains in effect until a Link Offline or Link Failure occurs, or a new set of Link Parameters is successfully exchanged between the E\_Ports.



## 6 Switch Fabric Services

### 6.1 Switch Fabric Internal Link Services (SW\_ILS)

This clause describes Link Services that operate internal to the Fabric between Switches. All SW\_ILS frames shall be transmitted using the FT-1 frame format via the Class F service. The following defines the header fields of all SW\_ILS frames:

- R\_CTL: This field shall be set to hex'02' for all request frames, and to hex'03' for all reply frames.
- CS\_CTL: This field shall be set to hex'00'.
- D\_ID and S\_ID: Set as indicated for the specific SW\_ILS.
- TYPE: This field shall be set to hex'22', indicating Fibre Channel Fabric Switch Services.

All other fields shall be set as appropriate according to the rules defined in FC-PH.

The first word in the payload specifies the Command Code. The Command Codes are summarized in table 2.

**Table 2 – SW\_ILS Command Codes**

Encoded Value (hex)	Description	Abbr.
01 00 00 00	Switch Fabric Internal Link Service Reject	SW_RJT
02 xx xx xx	Switch Fabric Internal Link Service Accept	SW_ACC
10 00 00 00	Exchange Link Parameters	ELP
11 xx xx xx	Exchange Fabric Parameters	EFP
12 00 00 00	Announce Address Identifier	AAI
13 00 xx xx	Request Domain ID	RDI
17 00 00 00	Build Fabric	BF
18 00 00 00	Reconfigure Fabric	RCF
20 00 00 00	Disconnect Class 1 Connection	DSCN
21 00 00 00	Detect Queued Class 1 Connection Request Deadlock	LOOPD
others	Reserved	
70 00 00 00 to 7F 00 00 00	Vendor Unique	

#### 6.1.1 Switch Fabric Internal Link Service Accept (SW\_ACC)

The Switch Fabric Internal Link Service Accept reply Sequence shall notify the transmitter of an SW\_ILS request that the SW\_ILS request Sequence has been completed. The first word of the Payload shall contain hex '02 xx xx xx'. The remainder of the Payload is unique to the specific SW\_ILS request.

**Protocol:** SW\_ACC may be sent as a reply Sequence to any SW\_ILS request.

**Format:** FT-1

**Addressing:** The S\_ID field shall be set to the value of the D\_ID field in the SW\_ILS request. The D\_ID field shall be set to the value of the S\_ID field in the SW\_ILS request.

**Payload:** The Payload content following the first word is defined within individual SW\_ILS requests.

### 6.1.2 Switch Fabric Internal Link Service Reject (SW\_RJT)

The Switch Fabric Internal Link Service Reject shall notify the transmitter of an SW\_ILS request that the SW\_ILS request Sequence has been rejected. A four-byte reason code shall be contained in the Data\_Field. SW\_RJT may be transmitted for a variety of conditions which may be unique to a specific SW\_ILS request.

**Protocol:** SW\_RJT may be sent as a reply Sequence to any SW\_ILS request.

**Format:** FT-1

**Addressing:** The S\_ID field shall be set to the value of the D\_ID field in the SW\_ILS request. The D\_ID field shall be set to the value of the S\_ID field in the SW\_ILS request.

**Payload:** The format of the SW\_RJT reply Payload is shown in table 3.

**Table 3 – SW\_RJT Payload**

Item	Size Bytes
hex '01 00 00 00'	4
Reserved	1
Reason Code	1
Reason Code Explanation	1
Vendor Unique	1

**Reason Code:** The Reason Codes are summarized in table 4.

**Table 4 – SW\_RJT Reason Codes**

Encoded Value (Bits 23-16)	Description
0000 0001	Invalid SW_ILS command code
0000 0010	Invalid revision level
0000 0011	Logical error
0000 0100	Invalid payload size
0000 0101	Logical busy
0000 0111	Protocol error
0000 1001	Unable to perform command request
0000 1011	Command not supported
others	Reserved
1111 1111	Vendor Unique error

Invalid SW\_ILS command code: The Command Code is not recognized by the recipient.

Invalid revision level: The recipient does not support the specified revision level.

Logical error: The request identified by the Command Code and the Payload content is invalid or logically inconsistent for the conditions present.

Invalid payload size: The size of the Payload is inconsistent with the Command Code and/or any Length fields in the Payload.

Logical busy: The recipient is busy and is unable to process the request at this time.

Protocol error: An error has been detected that violates the protocol.

Unable to perform command request: The recipient cannot perform the request.

Command not supported: The command code is not supported by the recipient.

Vendor Unique Error: The Vendor Unique field indicates the error condition.

**Reason Code Explanation:** The Reason Code Explanation is summarized in table 5.

**Table 5 – SW\_RJT Reason Code Explanation**

Encoded Value (Bits 15-8)	Description
0000 0000	No additional explanation
0000 0001	Class F Service Parameter error
0000 0011	Class N Service Parameter error
0000 0100	Unknown Flow Control code
0000 0101	Invalid Flow Control Parameters
0000 1101	Invalid Port_Name
0000 1110	Invalid Switch_Name
0000 1111	R_A_TOV or E_D_TOV mismatch
0001 0000	Invalid Domain_ID_List
0001 1001	Command already in progress
0010 1001	Insufficient resources available
0010 1010	Domain_ID not available
0010 1011	Invalid Domain_ID
0010 1100	Request not supported
0010 1101	Link Parameters not yet established
0010 1110	Contiguous Domain_IDs not available
0010 1111	E_Port is Isolated
others	Reserved

**Vendor Unique:** This field is valid when the Reason Code indicates a Vendor Unique error.

### 6.1.3 Exchange Link Parameters (ELP)

The Exchange Link Parameters Switch Fabric Internal Link Service requests the exchange of Link Parameters between two E\_Ports connected via an ISL. The exchange of Link Parameters establishes the operating environment between the two E\_Ports, and the capabilities of the Switches that are connected by the E\_Ports. When an ELP is received by an E\_Port, any Active or Open Class F Sequences between the two E\_Ports, and any Dedicated Connections, shall be abnormally terminated prior to transmission of the SW\_ACC reply Sequence.

Use of the ELP SW\_ILS for Switch Port initialization is described in 7.2. Other uses of ELP are not defined by this Standard.

**Protocol:**

Exchange Link Parameters (ELP) request Sequence  
Accept (SW\_ACC) Reply Sequence

**Format:** FT-1

**Addressing:** For use in Switch Port initialization, the S\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the originating Switch; the D\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the destination Switch.

**Payload:** The format of the ELP request Payload is shown in table 6.

**Table 6 – ELP Request Payload**

Item	Size Bytes
hex '10 00 00 00'	4
Revision	1
Reserved	3
R_A_TOV	4
E_D_TOV	4
Requester E_Port_Name	8
Requester Switch_Name	8
Class F Service Parameters	16
Class 1 E_Port Parameters	4
Class 2 E_Port Parameters	4
Class 3 E_Port Parameters	4
Reserved	20
ISL Flow Control Mode	2
Flow Control Parameter Length (N)	2
Flow Control Parameters	N

**Revision:** This field denotes the revision of the protocol. The first revision has the value of 1.

**R\_A\_TOV:** This field shall be set to the value of R\_A\_TOV required by the Switch.

**E\_D\_TOV:** This field shall be set to the value of E\_D\_TOV required by the Switch.

NOTE – The Value of R\_A\_TOV and E\_D\_TOV may be established by Profile or other means.

**E\_Port\_Name:** The E\_Port\_Name is an eight-byte field which identifies an E\_Port for identification purposes. The format of the name is specified in FC-PH. Each E\_Port shall provide a unique E\_Port\_Name within the Fabric.

**Switch\_Name:** The Switch\_Name is an eight-byte field which identifies a Switch for identification purposes. The format of the name is specified in FC-PH. Each Switch shall provide a unique Switch\_Name within the Fabric.

**Class F Service Parameters:** This field contains the E\_Port Class F Service Parameters. The format of the Parameters is shown in table 7.

**Table 7 – E\_Port Class F Service Parameters**

Word	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	V A L	Reserved															Reserved															
1	R	X I I	Reserved															Receive Data Field Size														
2	Concurrent Sequences															End-to-End Credit																
3	Open Sequences per Exchange															Reserved																

The Class F Service Parameters are defined as follows:

- VAL (Class Valid): This bit shall be set to one.
- XII (X\_ID Interlock): This bit when one indicates that the E\_Port supplying this parameter requires that an interlock be used during X\_ID assignment in Class F. In X\_ID assignment, the Sequence Initiator shall set the Recipient X\_ID value to hex'FFFF' in the first Data frame of a Sequence, and the Recipient shall supply its X\_ID in the ACK frame corresponding to the first Data frame of a Sequence. The Sequence Initiator shall not transmit additional frames until the corresponding ACK is received. Following reception of the ACK, the Sequence Initiator continues transmission of the Sequence using both assigned X\_ID values.
- Receive Data Field Size: This field shall specify the largest Data Field size in bytes for an FT-1 frame that can be received by the E\_Port supplying the Parameters as a Sequence Recipient for a Class F frame. Values less than 256 or greater than 2112 are invalid. Values shall be a multiple of four bytes.
- Concurrent Sequences: This field shall specify the number of Sequence Status Blocks provided by the E\_Port supplying the Parameters for tracking the progress of a Sequence as a Sequence Recipient. The maximum number of Concurrent Sequences that can be specified is 255. A value of zero in this field is reserved. In Class F, the value of SEQ\_ID shall range from 0 to 255, independent of the value in this field. An E\_Port is allowed to respond with P\_BSY to a frame initiating a new Sequence if E\_Port resources are not available.
- End-to-End Credit: End-to-end credit is the maximum number of Class F Data frames which can be transmitted by an E\_Port without receipt of accompanying ACK or Link\_Response frames. The minimum value of end-to-end credit is one. The end-to-end credit field specified is associated with the

number of buffers available for holding the Data\_Field of a Class F frame and processing the contents of that Data\_Field by the E\_Port supplying the Parameters. Bit 15 of this field shall be set to zero. A value of zero for this field is reserved.

- Open Sequences per Exchange: The value of the Open Sequences per Exchange shall specify the maximum number of Sequences that can be Open at one time at the Recipient between a pair of E\_Ports for one Exchange. This value plus two shall specify the number of instances of Sequence Status that shall be maintained by the Recipient for a single Exchange in the Exchange Status Block. This value is used for Exchange and Sequence tracking. The value in this field limits the link facility resources required for error detection and recovery (see FC-FG).

**Class N E\_Port Parameters:** E\_Port Parameters indicate that the E\_Port is capable of transporting the indicated Class of Service, and the conditions under which it can transport the Class. One word of the ELP Payload is allocated for each Class.

**Class 1 E\_Port Parameters:** This field contains the Class 1 E\_Port Parameters. The format of the Parameters is shown in table 8.

Table 8 – Class 1 E\_Port Parameters

Word	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	V	I	X	L	Reserved												Receive Data Field Size															
	A	M	P	K																												
	L	X	S	S																												

The Class 1 E\_Port Parameters are defined as follows:

- VAL (Class Valid): This bit is set to one if the E\_Port supports Class 1. If this bit is zero, all other Class 1 E\_Port Parameters shall be invalid.
- IMX (Intermix): This bit is set to one if the E\_Port can perform Intermix as defined in FC-PH. Intermix shall be functional only if both E\_Ports indicate support for this feature.
- XPS (Transparent Mode Stacked Connect Request): This bit is set to one if the E\_Port can perform Transparent Mode Stacked Connect Requests as defined in FC-PH. Transparent Mode Stacked Connect Requests shall be functional only if both E\_Ports indicate support for this feature. A Switch shall not indicate support for both XPS and LKS.
- LKS (Lock-down Mode Stacked Connect Request): This bit is set to one if the E\_Port can perform Lock-down Mode Stacked Connect Requests as defined in FC-PH. Lock-down Mode Stacked Connect Requests shall be functional only if both E\_Ports indicate support for this feature. A Switch shall not indicate support for both XPS and LKS.
- Receive Data Field Size: This field shall specify the largest Data Field size in bytes for an FT-1 frame that can be received by the E\_Port supplying the Parameters for a Class 1 frame. Values less than 256 or greater than 2112 are invalid. Values shall be a multiple of four bytes.

**Class 2 E\_Port Parameters:** This field contains the Class 2 E\_Port Parameters. The format of the Parameters is shown in table 9.

Table 9 – Class 2 E\_Port Parameters

Word	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	V A L	R			S E Q	Reserved											Receive Data Field Size															

The Class 2 E\_Port Parameters are defined as follows:

- VAL (Class Valid): This bit shall be set to one if the E\_Port supports Class 2. If this bit is zero, all other Class 2 E\_Port Parameters shall be invalid.
- SEQ (Sequential Delivery): If this bit is set to one by an E\_Port, it is indicating that the Switch is able to guarantee sequential delivery (as defined in FC-PH) of Class 2 frames. Sequential Delivery shall be functional only if both E\_Ports indicate support for this feature.
- Receive Data Field Size: This field shall specify the largest Data Field size in bytes for an FT-1 frame that can be received by the E\_Port supplying the Parameters for a Class 2 frame. Values less than 256 or greater than 2112 are invalid. Values shall be a multiple of four bytes.

**Class 3 E\_Port Parameters:** This field contains the Class 3 E\_Port Parameters. The format of the Parameters is shown in table 10.

**Table 10 – Class 3 E\_Port Parameters**

Word	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	V	A	R	S	Reserved												Receive Data Field Size															

The Class 3 E\_Port Parameters are defined as follows:

- VAL (Class Valid): This bit shall be set to one if the E\_Port supports Class 3. If this bit is zero, all other Class 3 E\_Port Parameters shall be invalid.
- SEQ (Sequential Delivery): If this bit is set to one by an E\_Port, it is indicating that the Switch is able to guarantee sequential delivery (as defined in FC-PH) of Class 3 frames. Sequential Delivery shall be functional only if both E\_Ports indicate support for this feature.
- Receive Data Field Size: This field shall specify the largest Data Field size in bytes for an FT-1 frame that can be received by the E\_Port supplying the Parameters for a Class 3 frame. Values less than 256 or greater than 2112 are invalid. Values shall be a multiple of four bytes.

**ISL Flow Control Mode:** This field contains a code which specifies the Flow Control method supported by the E\_Port. Values of hex'0000' and hex'FFFF' are reserved. Values of hex'8000' through hex'FFFE' are Vendor Unique. All other values are reserved for future standardization.

**Flow Control Parameter Length:** This field specifies the length in bytes of the Flow Control Parameters that follow. Values shall be a multiple of four. A value of zero indicates no parameters follow.

**Flow Control Parameters:** These parameters contain information used to configure Flow Control for the ISL.

NOTE – Different Switch implementations may use different methods for managing flow control of user frames across an ISL. These parameters are intended to provide a Switch-specific way to indicate these flow control parameters. A Switch will not be prohibited from supporting more than one method. See annex A for more information.

#### **Reply Switch Fabric Internal Link Service Sequence:**

- Service Reject (SW\_RJT)  
Signifies the rejection of the ELP command
- Accept (SW\_ACC)  
Signifies acceptance of the ELP request.
- Accept Payload

**Payload:** The format of the ELP Accept Payload is shown in table 11.

**Table 11 – ELP Accept Payload**

Item	Size Bytes
hex '02 00 00 00'	4
Revision	1
Reserved	3
R_A_TOV	4
E_D_TOV	4
Responder E_Port_Name	8
Responder Switch_Name	8
Class F Service Parameters	16
Class 1 E_Port Parameters	4
Class 2 E_Port Parameters	4
Class 3 E_Port Parameters	4
Reserved	20
ISL Flow Control Mode	2
Flow Control Parameter Length (N)	2
Flow Control Parameters	N

The fields in table 11 are the same as defined for table 6.

#### 6.1.4 Exchange Fabric Parameters (EFP)

The Exchange Fabric Parameters Switch Fabric Internal Link Service requests the exchange of Fabric Parameters between two E\_Ports connected via an ISL. The exchange of Fabric Parameters is used to establish the address allocation within the Fabric. When an E\_Port receives EFP from another E\_Port, all Active or Open Class F Sequences and Dedicated Connections shall be unaffected.

Use of the EFP SW\_ILS for Fabric Configuration is described in 7.3 and 7.4. Other uses of EFP are not defined by this Standard.

#### Protocol:

Exchange Fabric Parameters (EFP) request Sequence  
Accept (SW\_ACC) Reply Sequence

**Format:** FT–1

**Addressing:** For use in Fabric Configuration, the S\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the originating Switch. The D\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the destination Switch.



**Payload:** The format of the EFP request Payload is shown in table 12.

**Table 12 – EFP Request Payload**

Item	Size Bytes
Command code = hex '11'	1
Record length = hex '10'	1
Payload length	2
Reserved	3
Principal Switch_Priority	1
Principal Switch_Name	8
Domain_ID_List	N

**Record Length:** This field contains an 8-bit unsigned binary integer that specifies the total length of each record in the Payload (see below). The value shall be hex '10'.

**Payload Length:** This field contains a 16-bit unsigned binary integer that specifies the total length of the Payload. The rightmost two bits shall be zero. The value specified shall be greater than or equal to 16, and less than or equal to 65532.

**Principal Switch\_Priority:** This field shall specify the priority level of the Switch that the transmitting Switch believes is the Principal Switch. Values for this field are summarized in table 13.

**Table 13 – Switch\_Priority Field Values**

Value (hex)	Description
00	Reserved
01	Highest priority value. (note 1)
02	The Switch was the Principal Switch prior to sending or receiving BF. (note 2)
02 to FE	Higher to lower priority values. (note 3)
FF	The Switch is not capable of acting as a Principal Switch.
Notes: 1 This value allows the system administrator to establish which Switch becomes the Principal Switch. 2 This allows the same Switch to become Principal Switch if it is still part of the Fabric after sending and/or receiving the Build Fabric SW_ILS. 3 The Switch_Priority value for a given Switch is established by means not defined by this Standard.	

**Principal Switch\_Name:** This field shall specify the Switch\_Name of the Switch that the transmitting Switch believes is the Principal Switch.

**Domain\_ID\_List:** This field shall contain a list of records which specify the Domain\_ID and corresponding Switch\_Name of the Switch that has been granted the Domain\_ID by the Principal Switch. The Domain\_ID\_List shall contain a record for each value of Domain\_ID which has been assigned. If no Switch

has been assigned a Domain\_ID, the Domain\_ID\_List shall contain no records. The format of a Domain\_ID\_List record is shown in table 14.

**Table 14 – Domain\_ID\_List Record Format**

Item	Size Bytes
Record_Type	1
Domain_ID	1
Reserved	2
Reserved	4
Switch_Name for Domain_ID	8

**Record\_Type:** This field shall specify the type of record. Values for this field are summarized in table 15.

**Table 15 – Record\_Type Field Values**

Value (hex)	Description
00	Reserved
01	Domain_ID_List record
all others	Reserved (note 1)
Notes:	
1 A second record type may be defined for Alias groups in a future standard.	

**Domain\_ID:** This field shall specify the Domain\_ID assigned by the Principal Switch.

**Switch\_Name for Domain\_ID:** This field shall specify the Switch\_Name of the Switch that has been assigned the Domain\_ID by the Principal Switch.

**Reply Switch Fabric Internal Link Service Sequence:**

- Service Reject (SW\_RJT)
  - Signifies the rejection of the EFP command
- Accept (SW\_ACC)
  - Signifies acceptance of the EFP request.
- Accept Payload

**Payload:** The format of the EFP Accept Payload is shown in table 16.

**Table 16 – EFP Accept Payload**

Item	Size Bytes
Command code = hex '02'	1
Page length = hex '10'	1
Payload length	2
Reserved	3
Principal Switch_Priority	1
Principal Switch_Name	8
Domain_ID_List	N

The fields in table 16 are the same as defined for table 12.

### 6.1.5 Announce Address Identifier (AAI)

The Announce Address Identifier Switch Fabric Internal Link Service communicates the address identifier of the E\_Port to another E\_Port. This communication establishes that the E\_Port has been assigned an address identifier, and that the Recipient may request an address identifier from the Originating E\_Port.

Use of the AAI SW\_ILS for Fabric Configuration is described in 7.4. Other uses of AAI are not defined by this Standard.

#### Protocol:

Announce Address Identifier (AAI) request Sequence  
Accept (SW\_ACC) Reply Sequence

#### Format: FT-1

**Addressing:** For use in Fabric Configuration, the S\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the originating Switch. The D\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the destination Switch.

**Payload:** The format of the AAI request Payload is shown in table 17.

**Table 17 – AAI Request Payload**

Item	Size Bytes
hex '12 00 00 00'	4
Originating Switch_Name	8
Reserved	1
Originating Address identifier	3

**Originating Switch\_Name:** This field shall contain the Switch\_Name of the Originating E\_Port.

**Originating Address identifier:** This field shall contain the address identifier of the Originating E\_Port.

**Reply Switch Fabric Internal Link Service Sequence:**

Service Reject (SW\_RJT)

Signifies the rejection of the AAI command

Accept (SW\_ACC)

Signifies acceptance of the AAI request.

– Accept Payload

**Payload:** The format of the AAI Accept Payload is shown in table 18.

**Table 18 – AAI Accept Payload**

Item	Size Bytes
hex '02 00 00 00'	4
Responding Switch_Name	8
Reserved	1
Responding Address identifier	3

**Responding Switch\_Name:** This field shall contain the Switch\_Name of the Responding E\_Port.

**Responding Address identifier:** This field shall contain the address identifier of the Responding E\_Port.

#### 6.1.6 Request Domain\_ID (RDI)

The Request Domain\_ID Switch Fabric Internal Link Service is sent by a Switch to request a Domain\_ID from the Domain Address Manager. RDI shall not be sent by a Switch unless the Switch has received an AAI SW\_ILS since the last reconfiguration event.

Use of the RDI SW\_ILS for Fabric Configuration is described in 7.4. Other uses of RDI are not defined by this Standard.

#### Protocol:

Request Domain\_ID (RDI) request Sequence

Accept (SW\_ACC) Reply Sequence

**Format:** FT-1

**Addressing:** For use in Fabric Configuration, the S\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the originating Switch. The D\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the destination Switch.

**Payload:** The format of the RDI request Payload is shown in table 19.

**Table 19 – RDI Request Payload**

Item	Size Bytes
hex '13'	1
Reserved	1
Payload Length	2
Requesting Switch_Name	8
Reserved	3
Requested Domain_ID #1	1
Reserved	3
Requested Domain_ID #2	1
...	
Reserved	3
Requested Domain_ID #n	1

**Payload Length:** This field contains a 16-bit unsigned binary integer that specifies the total length of the Payload. The rightmost two bits shall be zero. The value specified shall be greater than or equal to 16, and less than or equal to 968.

**Requesting Switch\_Name:** This field specifies the Switch\_Name of the Switch requesting a Domain\_ID.

**Requested Domain\_ID:** This field shall contain the requested Domain\_ID of the Switch requesting a Domain\_ID. This field is set to either the Preferred Domain\_ID if it is available, or zero. If more than one Requested Domain\_ID is specified, the Domain\_IDs shall represent a contiguous Domain\_ID space; each Domain\_ID shall be separated from another Domain\_ID by a value of one.

**Reply Switch Fabric Internal Link Service Sequence:**

- Service Reject (SW\_RJT)
  - Signifies the rejection of the RDI command
- Accept (SW\_ACC)
  - Signifies acceptance of the RDI request.
- Accept Payload

**Payload:** The format of the RDI accept Payload is shown in table 20.

**Table 20 – RDI Accept Payload**

Item	Size Bytes
hex '02'	1
Reserved	1
Payload Length	2
Requesting Switch_Name	8
Reserved	3
Granted Domain_ID #1	1
Reserved	3
Granted Domain_ID #2	1
...	
Reserved	3
Granted Domain_ID #n	1

**Payload Length:** This field contains a 16-bit unsigned binary integer that specifies the total length of the Payload. The rightmost two bits shall be zero. The value specified shall be equal to the value specified in the Request Payload.

**Requesting Switch\_Name:** This field specifies the Switch\_Name of the Switch requesting a Domain\_ID.

**Granted Domain\_ID:** This field shall contain the Domain\_ID granted by the Domain Address Manager to the requesting Switch. This field is set to either the Preferred Domain\_ID specified in the Request if it is available, or zero. If more than one Requested Domain\_ID was specified in the Request, the Response shall contain a number of Granted Domain\_IDs equal to the number requested, and that represent a contiguous Domain\_ID space; each Domain\_ID shall be separated from another Domain\_ID by a value of one. If the Domain Address Manager is unable to grant the full set of contiguous Domain\_IDs, it shall reject the Request.

NOTE – The ability to grant more than one Domain\_ID to a single Switch is intended to be used by Switches whose addressing scheme requires the use of more than one Domain\_ID. The typical case, however, should be for one Switch to request exactly one Domain\_ID.

#### 6.1.7 Build Fabric (BF)

The Build Fabric Switch Fabric Internal Link Service requests a non-disruptive reconfiguration of the entire Fabric. Fabric Configuration is performed as described in clause 7.

NOTE – Since the RCF causes a complete reconfiguration of the Fabric, and may cause addresses allocated to a Switch to change, the RCF SW\_ILS should be used with caution. The BF SW\_ILS allows the Fabric to attempt reconfiguration without loss of or change of address. Examples of situations in which BF is appropriate include a loss of a Principal ISL (Link Failure or Offline), or when two Fabrics are joined.

The transmission or reception of BF shall not of itself cause the loss of Class N frames, or cause a busy response to any Class N frames. Active or Open Class F Sequences between the two E\_Ports, and any Dedicated Connections, shall not be abnormally terminated.

Use of the BF SW\_ILS for Fabric Configuration is described in 7.3 and 7.4. Other uses of BF are not defined by this Standard.

**Protocol:**

Build Fabric (BF) request Sequence  
Accept (SW\_ACC) Reply Sequence

**Format:** FT-1

**Addressing:** For use in Fabric Configuration, the S\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the originating Switch. The D\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the destination Switch.

**Payload:** The format of the BF request Payload is shown in table 21.

**Table 21 – BF Request Payload**

Item	Size Bytes
hex '17 00 00 00'	4

**Reply Switch Fabric Internal Link Service Sequence:**

Service Reject (SW\_RJT)  
Signifies the rejection of the BF command  
Accept (SW\_ACC)  
Signifies acceptance of the BF request.  
– Accept Payload

**Payload:** The format of the BF accept Payload is shown in table 22.

**Table 22 – BF Accept Payload**

Item	Size Bytes
hex '02 00 00 00'	4

### 6.1.8 Reconfigure Fabric (RCF)

The Reconfigure Fabric Switch Fabric Internal Link Service requests a disruptive reconfiguration of the entire Fabric. Fabric Configuration is performed as described in clause 7.

NOTE – Since the RCF causes a complete reconfiguration of the Fabric, and may cause addresses allocated to a Switch to change, this SW\_ILS should be used with caution. Examples of situations in which RCF is appropriate include detection of overlapped Domains, or the failure of a Fabric Reconfiguration initiated by a BF.

When an RCF is transmitted by an E\_Port, any Active or Open Class F Sequences between the two E\_Ports, and any Dedicated Connections, shall be abnormally terminated. Also, all Class N frames shall be discarded, and all Dedicated Connections shall be abnormally terminated.

When an RCF is received by an E\_Port, any Active or Open Class F Sequences between the two E\_Ports, and any Dedicated Connections, shall be abnormally terminated prior to transmission of the SW\_ACC reply Sequence. Also, all Class N frames shall be discarded, and all Dedicated Connections shall be abnormally terminated prior to transmission of the SW\_ACC reply Sequence.

Use of the RCF SW\_ILS for Fabric Configuration is described in 7.3 and 7.4. Other uses of RCF are not defined by this Standard.

**Protocol:**

Reconfigure Fabric (RCF) request Sequence  
 Accept (SW\_ACC) Reply Sequence

**Format:** FT-1

**Addressing:** For use in Fabric Configuration, the S\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the originating Switch. The D\_ID field shall be set to hex'FFFFFFD', indicating the Fabric Controller of the destination Switch.

**Payload:** The format of the RCF request Payload is shown in table 23.

**Table 23 – RCF Request Payload**

Item	Size Bytes
hex '18 00 00 00'	4

**Reply Switch Fabric Internal Link Service Sequence:**

Service Reject (SW\_RJT)  
 Signifies the rejection of the RCF command  
 Accept (SW\_ACC)  
 Signifies acceptance of the RCF request.  
 – Accept Payload

**Payload:** The format of the RCF accept Payload is shown in table 24.

**Table 24 – RCF Accept Payload**

Item	Size Bytes
hex '02 00 00 00'	4

**6.1.9 Disconnect Class 1 Connection (DSCN)**

The Disconnect Class 1 Connection Switch Fabric Internal Link Service requests that the receiving E\_Port abort an existing Class 1 Connection. This SW\_ILS is used only if Link Failure or Link Reset is detected in the connection path. An F\_Port that receives this SW\_ILS shall perform a Link Reset to abort the connection with the attached N\_Port.

NOTE – Normal disconnect should be performed by detecting EOFdt.

**Protocol:**

Disconnect Class 1 Connection (DSCN) request Sequence  
 Accept (SW\_ACC) Reply Sequence

**Format:** FT-1

**Addressing:** The S\_ID field shall be set to the address identifier of the sending E\_Port. The D\_ID field shall be set to the address identifier of the destination E\_Port or F\_Port.



**Payload:** The format of the DSCN request Payload is shown in table 25.

**Table 25 – DSCN Request Payload**

Item	Size Bytes
hex '20 00 00 00'	4
Reserved	3
Reason code for disconnect	1

**Reason code for disconnect:** This field specifies the reason for the disconnect, summarized in table 26.

**Table 26 – DSCN Reason Codes**

Encoded Value (Bits 7-0)	Description
0000 0001	Link Failure or Link Reset occurred
others	Reserved
1111 1111	Vendor Unique error

#### **Reply Switch Fabric Internal Link Service Sequence:**

Service Reject (SW\_RJT)

Signifies the rejection of the DSCN command

Accept (SW\_ACC)

Signifies acceptance of the DSCN request.

– Accept Payload

**Payload:** The format of the DSCN accept Payload is shown in table 27.

**Table 27 – DSCN Accept Payload**

Item	Size Bytes
hex '02 00 00 00'	4

#### **6.1.10 Detect Queued Class 1 Connection Request Deadlock (LOOPD)**

The Detect Queued Class 1 Connection Request Deadlock Switch Fabric Internal Link Service is used to check for possible deadlocks caused by Connection requests being queued at the destination F\_Port (Camp-On). For example, if a connection request from port A is queued at port B, a request from port B is queued at port C, and a request from port C is queued at port A, a deadlock has occurred.

A LOOPD SW\_ILS shall be originated by the F\_Port that received and queued the Camp-On connection request. The destination of the LOOPD SW\_ILS shall be the F\_Port with which the originating F\_Port has an existing connection. The "Originating F\_Port" field in the LOOPD request Payload shall be set equal to the address identifier of the originating F\_Port. The LOOPD request and reply Sequences shall be routed by the Fabric from the source F\_Port to the destination F\_Port in a manner not defined by this Standard.

An F\_Port that receives an acceptable LOOPD request shall reply with an SW\_ACC reply Sequence and perform one of the following actions:

- If the address identifier of the receiving F\_Port is equal to the "Originating F\_Port" field in the LOOPD request Payload, and the receiving F\_Port has a queued Camp-On connection request from the F\_Port that sent the LOOPD request, the receiving F\_Port shall reject the queued Camp-On connec-

tion request. The sending F\_Port shall send an F\_BSY to the requesting N\_Port with a Reason Code of Fabric\_Busy.

- If the address identifier of the receiving F\_Port is equal to the “Originating F\_Port” field in the LOOPD request Payload, and the receiving F\_Port does not have a queued Camp-On connection request from the F\_Port that sent the LOOPD request, the receiving F\_Port shall perform no action; i.e., not reject any queued Camp-On connection request.
- If the address identifier of the receiving F\_Port is not equal to the “Originating F\_Port” field in the LOOPD request Payload, and the receiving F\_Port has a queued Camp-On connection request pending at another F\_Port, the receiving F\_Port shall initiate a new LOOPD request to the F\_Port with which the receiving F\_Port has an existing connection, using without modification the received LOOPD request Payload as the Payload for the new request.
- If the address identifier of the receiving F\_Port is not equal to the “Originating F\_Port” field in the LOOPD request Payload, and the receiving F\_Port does not have a queued Camp-On connection request pending at another F\_Port, the receiving F\_Port shall perform no action.

Note that if the originating F\_Port and the destination F\_Port are both part of the same Switch, the deadlock may be detected without use of this SW\_ILS.

#### Protocol:

Detect Queued Class 1 Connection Request Deadlock (LOOPD) request Sequence  
Accept (SW\_ACC) Reply Sequence

**Format:** FT–1

**Addressing:** The S\_ID field shall be set to the address identifier of the sending F\_Port. The D\_ID field shall be set to the address identifier of the destination F\_Port.

**Payload:** The format of the LOOPD request Payload is shown in table 28.

**Table 28 – LOOPD Request Payload**

Item	Size Bytes
hex ‘21 00 00 00’	4
Reserved	1
Originating F_Port	3

**Originating F\_Port:** This field specifies the address identifier of the F\_Port that first originated the LOOPD request. A F\_Port that initiates a LOOPD request as a result of receiving a LOOPD request shall use the contents of this field unmodified in the request Payload.

#### Reply Switch Fabric Internal Link Service Sequence:

- Service Reject (SW\_RJT)  
Signifies the rejection of the LOOPD command
- Accept (SW\_ACC)  
Signifies acceptance of the LOOPD request.
- Accept Payload

**Payload:** The format of the LOOPD accept Payload is shown in table 29.

**Table 29 – LOOPD Accept Payload**

Item	Size Bytes
hex '02 00 00 00'	4

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000

## 7 Fabric Configuration

### 7.1 Summary


The Fabric Configuration process enables a Switch Port to determine its operating mode, exchange operating parameters, and provides for distribution of addresses. This process is summarized in table 30.

**Table 30 – Fabric Configuration Summary**

Step	Starting State	Process	Ending State
1. Establish Link Parameters and Switch Port operating mode	Switch Port has achieved word synch.	The Switch Port attempts to discover whether it is an FL_Port, an E_Port or an F_Port.	Switch Port mode is known. If a Port is an E_Port, Link Parameters have been exchanged and Credit has been initialized.
2. Select Principal Switch	BF or RCF SW_ILS transmitted or received.	Switch_Names are exchanged over all ISLs to select a Principal Switch, which becomes the Domain Address Manager.	The Principal Switch is selected.
3. Domain_ID Distribution	Domain Address Manager has been selected.	Switches request a Domain_ID from the Domain Address Manager.	All Switches have a Domain_ID.
4. Path Selection	All Switches have a Domain_ID.	Path Selection is not defined by this Standard.	Fabric is operational.

### 7.2 Switch Port Initialization

Switch Ports shall initialize as described below. Figure 9 shows a diagram of the process to illustrate the flow. If the figure is different than the text, the text shall apply. Note also that this flow assumes that a Switch Port is capable of at least E\_Port operation; either E/F/FL\_Port, E/F\_Port, E/FL\_Port, or E\_Port. Initialization of Switch Ports that are F/FL\_Port, FL\_Port, or F\_Port is defined in FC-PH and FC-AL.

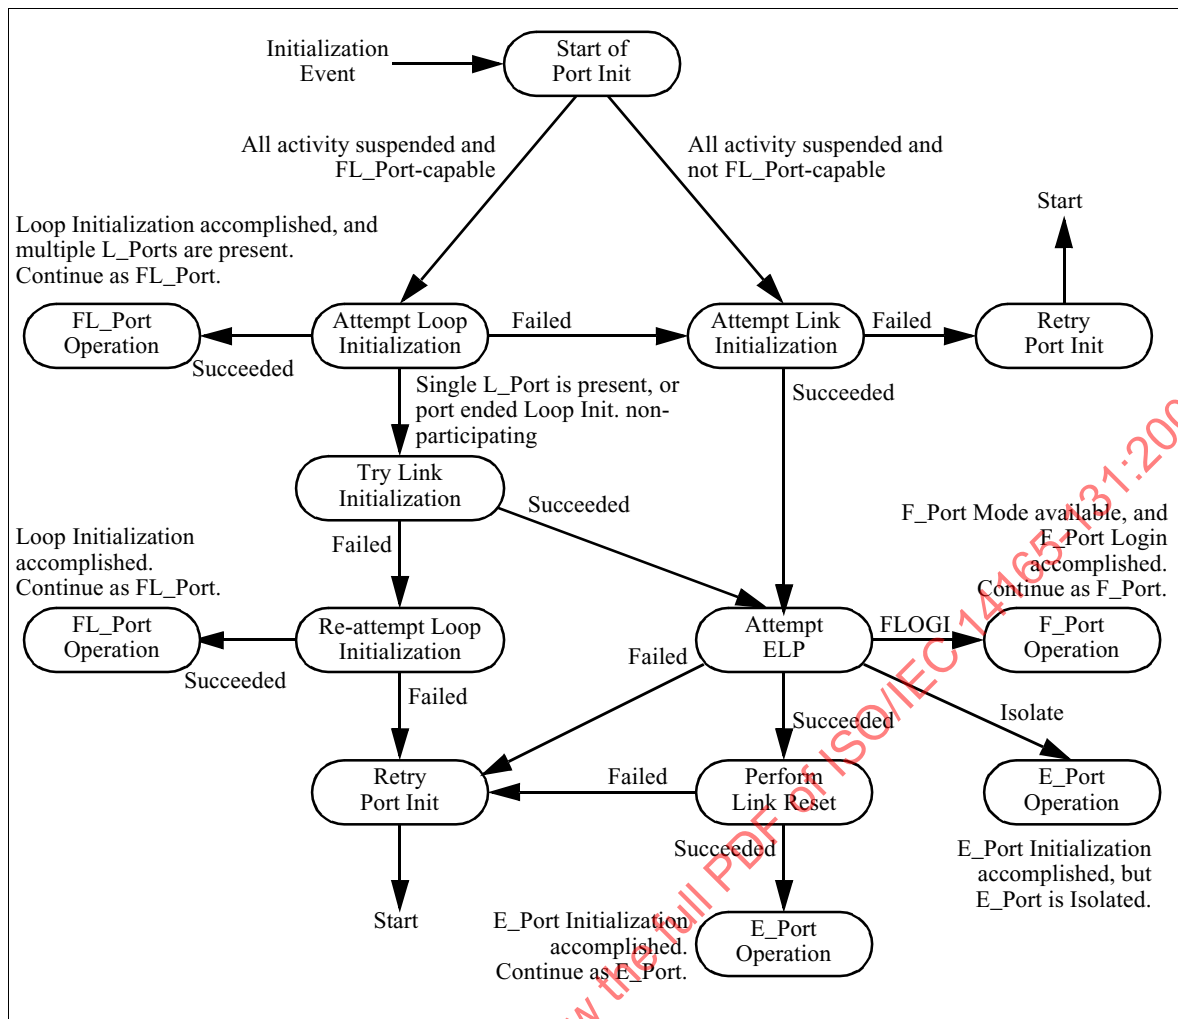

**Figure 9 – Switch Port Mode Initialization Flow**

a) **Start of Switch Port Initialization.** Switch Port initialization begins whenever an Initialization Event occurs. An Initialization Event can be:

- a power-on reset condition; or,
- receiving an initialization Primitive Sequence, such as LR or LIP; or,
- outside intervention requesting an initialization; or,
- a transition to Link Offline, as defined in FC-PH; or,
- a loss of word synchronization; or,
- RCF received by an Isolated E\_Port (see 7.5); or,
- a failure to successfully complete a prior initialization attempt, and the timeout period has expired.

When an Initialization Event occurs, all activity on the Switch Port is suspended until the Initialization is complete. Go to **step (b)**.

b) **Attempt Loop Initialization.** An FL\_Port-capable Switch Port attempts Loop Initialization (as defined in FC-AL clause 10). If the FL\_Port transitions from the OPEN\_INIT state to the MONITORING state and in participating mode, and the resulting AL\_PA bitmap generated during the LISA Loop Initialization Sequence indicates more than one L\_Port (other than the Switch Port) is attached, the Switch Port shall go to **step (h)**. If the FL\_Port transitions from the OPEN\_INIT state to the MONITORING state and in participating mode, and the resulting AL\_PA bitmap generated during the LISA Loop Initialization Sequence indicates zero or one L\_Port (other than the Switch Port) is attached,

the Switch Port shall go to **step (c)**. If the FL\_Port transitions from the OPEN\_INIT state to the MONITORING state and in non-participating mode, the Switch Port shall go to **step (c)**. Otherwise, go to **step (e)**.

- c) **Try Link Initialization.** In this step, the Switch Port is FL\_Port-capable, and it has detected zero or one attached L\_Port (NL\_Port or FL\_Port), or has transitioned to the MONITORING state in non-participating mode. There is a possibility that the Switch Port is point-to-point attached to another FL\_Port-capable Switch Port. If the Switch Port is in the MONITORING state and in participating mode, it shall attempt Link Initialization as defined in FC-PH. If the Switch Port is in the MONITORING state and in non-participating mode, it shall remain in this state until it detects an attempt at Link Initialization, or it detects a new Initialization Event. If the attempted Link Initialization succeeds, proceed to **step (f)**. If the attempted Link Initialization fails, the Switch Port shall proceed to **step (d)** and retry Loop Initialization.
- d) **Re-attempt Loop Initialization.** In this step, the Switch Port has detected that it may be able to operate point-to-point with another loop device, but the attempt to do so failed. In this case, the Switch Port shall then attempt to go back to loop operation by retrying Loop Initialization (as defined in FC-AL clause 10). If the Loop Initialization succeeds (the FL\_Port transitions from the OPEN\_INIT state to the MONITORING state and participating), the Switch Port shall go to **step (h)**. Otherwise, go to **step (l)**.
- e) **Attempt Link Initialization.** The Switch Port shall attempt Link Initialization as defined in FC-PH. If the Link Initialization succeeds, proceed to **step (f)**. Otherwise, the Switch Port shall proceed to **step (l)** and retry the initialization.
- f) **Attempt to Exchange Link Parameters.** The Switch Port shall originate an ELP SW\_ILS request Sequence (see 6.1.3). Table 31 below defines the responses and actions to an ELP request for the originating E\_Port.

**Table 31 – Responses to ELP Request for Originating E\_Port**

Response to ELP	Indication	Originating E_Port Action
1. R_RDY	Request received at destination	Wait E_D_TOV for response frame
2. ACK_1	Request received at destination	Wait E_D_TOV for response frame
3. SW_ACC	Destination E_Port received and processed request	Send ACK_1, continue configuration with <b>step (g)</b>
4. F_BSY or P_BSY	Destination is busy	Retry (note 1)
5. F_RJT or P_RJT	The frame is not acceptable	Respond accordingly (note 3)
6. ELP (rcvd E_Port_Name > own E_Port_Name)	Both E_Ports sent ELP at the same time	Send SW_ACC, continue configuration with <b>step (g)</b> (see Figure 10 for an example of this response)
7. ELP (rcvd E_Port_Name < own E_Port_Name)	Both E_Ports sent ELP at the same time	Send SW_RJT (note 2) (see Figure 10 for an example of this response)
8. ELP (rcvd E_Port_Name = own E_Port_Name)	E_Port output is looped back to input	Remove loopback condition

**Table 31 – Responses to ELP Request for Originating E\_Port**

Response to ELP	Indication	Originating E_Port Action
9. SW_RJT	Reason code/explanation: - Command already in progress  - Logical busy - other	- send SW_ACC (note 4) (see Figure 10 for an example of this response) - retry (note 1) - respond accordingly
10. FLOGI	Destination is an N_Port	Respond accordingly (note 3)
11. any other frame	Could be anything	Discard frame and retry (note 1)
12. E_D_TOV expires	Destination is busy; or, ELP, SW_ACC, ACK_1 frame lost; or, destination is not an E_Port	Retry (note 1)
Notes:  1 The retry is performed following a timeout period, as defined in <b>step (I)</b> below.  2 The Reason Code shall be “Unable to perform command request” with an Reason Explanation of “Command already in progress”.  3 Response is defined in FC-PH. A retry may be appropriate.  4 The SW_ACC is sent for the other ELP Exchange in progress, as described in Response #6. See figure 10.		

The originating E\_Port shall consider the exchange of Link Parameters complete (but not necessarily successful) when it has received the SW\_ACC or SW\_RJT and has transmitted the ACK\_1 for the SW\_ACC or SW\_RJT reply Sequence. The responding E\_Port shall consider the exchange of Link Parameters complete when it has received the ACK\_1 for the SW\_ACC or SW\_RJT. The exchange of Link Parameters shall be considered successful when the exchange of Link Parameters is complete, and the reply to the ELP is an SW\_ACC, and both E\_Ports agree that the parameters exchanged are acceptable. If the exchange of Link Parameters is successful, the Switch Port shall go to **step (g)**. If the responding E\_Port does not agree that the parameters are acceptable, it shall return an SW\_RJT reply Sequence indicating the reason for the disagreement, and wait for the originating E\_Port to initiate another ELP request Sequence. If the originating E\_Port does not agree that the parameters in the SW\_ACC are acceptable, or it receives an SW\_RJT indicating the parameters in the ELP request were not acceptable to the responding E\_Port, it may:

- 1) originate a new ELP request Sequence with modified parameters; or,
- 2) go to **step (j)** and operate as an Isolated E\_Port (see 7.5); or,
- 3) perform the Link Offline protocol as defined in FC-PH and go to **step (I)** and retry the initialization.

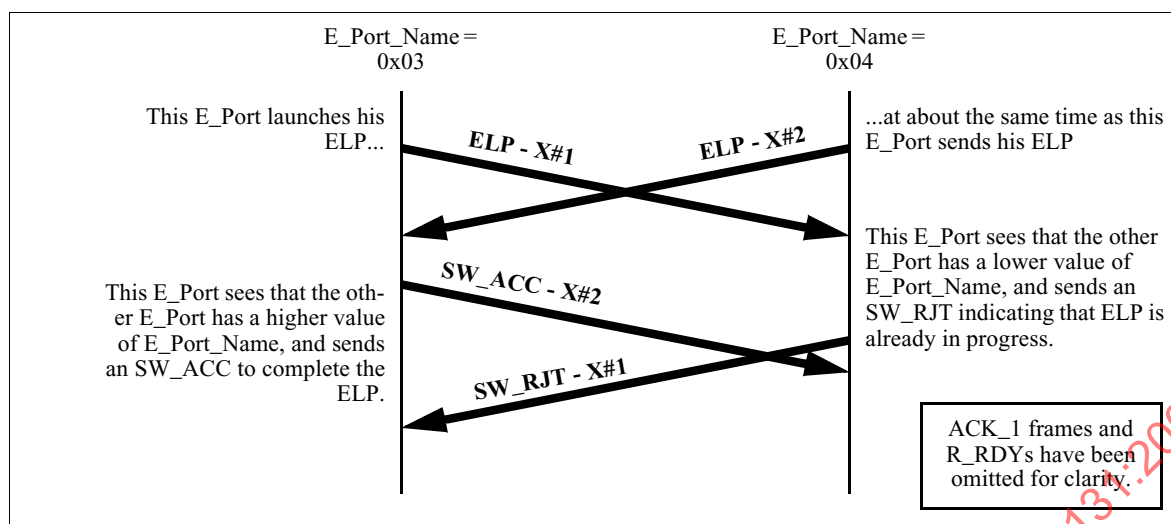


Figure 10 – Simultaneous ELP Processing

- g) **Perform Link Reset.** Following the successful completion of ELP, the value of buffer-to-buffer and end-to-end Class F Credit are initialized. In order to initialize the Flow Control parameters, the Switch Port that originated the successful ELP SW\_ILS shall attempt the Link Reset protocol as defined in FC-PH. If the Link Reset succeeds, go to **step (k)**. Otherwise, go to **step (l)**.

NOTE – The re-initialization of Link credit is necessary since the Flow Control parameters in the ELP Payload are intended to communicate Link credit parameters for a specific credit model. The Link Reset is the common method defined by FC-PH for establishing a known credit state.

- h) **Initialize as an FL\_Port.** The Switch Port has detected a functional Arbitrated Loop. The Switch Port shall continue to operate as an FL\_Port until the next Initialization Event.
- i) **Initialize as an F\_Port.** The Switch Port has detected an attached N\_Port. The Switch Port shall continue to operate as an F\_Port until the next Initialization Event.
- j) **Initialize as an Isolated E\_Port.** The Switch Port has completed the exchange of Link Parameters with another E\_Port. If the Link Parameters exchanged were not acceptable, then the E\_Port shall become Isolated and not continue with Fabric Configuration, as described in 7.5. The Switch Port shall continue to operate as an E\_Port until the next Initialization Event.
- k) **Initialize as an E\_Port.** The Switch Port has completed the exchange of Link Parameters with another E\_Port. If the Link Parameters exchanged were acceptable, then the E\_Port shall participate in the next phase of Fabric Configuration, described in 7.3. The Switch Port shall continue to operate as an E\_Port until the next Initialization Event.
- l) **Retry Switch Port Initialization.** The Switch Port shall wait for R\_A\_TOV before retrying Switch Port Initialization. If the Switch Port is FL\_Port-capable, it shall transmit LIP; otherwise, it shall transmit OLS. If the Switch Port detects an Initialization Event during the timeout period, it shall not wait for the timeout period to expire; the Switch Port shall go to **step (a)**. Otherwise, after the timeout period has expired, the Switch Port shall go to **step (a)**.

### 7.3 Principal Switch Selection

A Principal Switch shall be selected whenever at least one Inter-Switch Link is established. The selection process chooses a Principal Switch, which is then designated as the Domain Address Manager. The behavior of a Switch during this process is as follows:

- a) A Switch may request a Fabric Reconfiguration at any time by transmitting a BF or an RCF request Sequence. Unless warranted by current conditions, a Switch shall always first attempt a non-disrup-




tive Fabric Reconfiguration by sending BF request Sequence. The recommended uses of BF and RCF are summarized in table 32.

**Table 32 – Recommended BF and RCF Usage Summary**

Event	BF or RCF Response
A Principal ISL experiences Link Failure or a transition to Offline	BF
A configured Fabric is joined to another configured Fabric, and they do not overlap	BF
An unconfigured Switch or Fabric is joined to a configured Fabric	neither (see below)
A configured Fabric is joined to another configured Fabric, and an overlap is detected	RCF
Reconfiguration caused by BF fails for any reason	RCF

- b) If the Switch is attempting a non-disruptive Fabric Reconfiguration, the Switch shall transmit a BF request Sequence on all E\_Ports that the Switch has not yet received a BF request. The Switch shall respond appropriately to any BF request Sequence received on any E\_Port, and shall not transmit a BF request Sequence on any E\_Port from which a BF request Sequence has been received. Figure 11 shows an example diagram of the process to illustrate the flow of the requests. Any Class F frames other than RCF requests and the associated SW\_ACC and ACK\_1 frames shall receive an F\_BSY response, with a Reason Code of "The Fabric is busy".

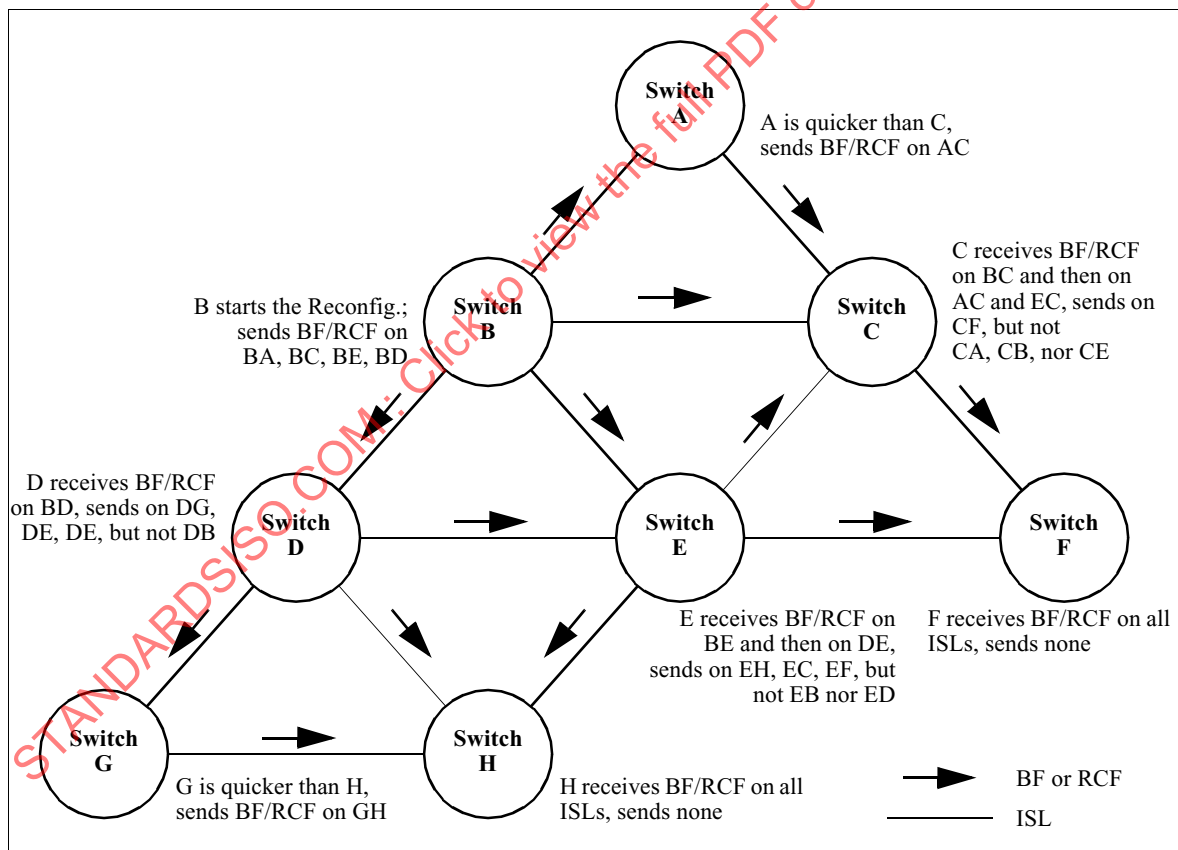

**Figure 11 – Propagation of BF and RCF SW\_ILS requests**

- c) If the Switch is attempting a disruptive Fabric Reconfiguration, the Switch shall transmit an RCF request Sequence on all E\_Ports that the Switch has not yet received an RCF request. The Switch shall respond appropriately to any RCF request Sequence received on any E\_Port, and shall not transmit an RCF request Sequence on any E\_Port from which an RCF request Sequence has been received.

- d) If a Switch receives an RCF request Sequence while it is in the process of attempting a non-disruptive Fabric Reconfiguration, it shall stop the non-disruptive Fabric Reconfiguration and begin processing RCF requests as described above. Any Active or Open BF Sequences shall be abnormally terminated.
- e) A Switch that is not yet configured (for example, after initial power-on) is not required to request BF or RCF. It may instead transmit an EFP SW\_ILS to all initialized E\_Ports to determine if the Switch is attached to a configured Fabric. The Switch shall process any received BF or RCF requests as described above.
- f) The Switch shall wait for twice F\_S\_TOV following the completion of the last BF or RCF Exchange before originating an EFP request Sequence.
- g) The Switch shall process all EFP Payloads based on the information available at the time of processing. A Switch may receive an EFP Payload either by receiving an EFP request Sequence at an E\_Port, or by receiving at an E\_Port an SW\_ACC reply Sequence in response to an EFP request Sequence.
- h) At the start of a non-disruptive Fabric Reconfiguration (BF), or a disruptive Fabric Reconfiguration (RCF), the Domain\_ID\_List shall be empty ("zero Domain\_ID\_List").
- i) The Switch shall retain a Switch\_Priority||Switch\_Name value that it believes is the lowest in the Fabric. This value shall be initialized at the start of Fabric Reconfiguration (caused by BF or RCF) to the Switch's value of Switch\_Priority||Switch\_Name. After the Switch is configured, it shall retain as the lowest value the Switch\_Priority||Switch\_Name of the Principal Switch.
- j) If the Switch receives in an EFP Payload a non-zero Domain\_ID\_List (the list contains one or more records) and the Switch has a zero Domain\_ID\_List, then the Switch shall retain the received Switch\_Priority||Switch\_Name as the new value. The Switch shall also note from which E\_Port it received the new value, for potential use as the upstream Principal ISL during address distribution.
- k) If the Switch receives in an EFP Payload a zero Domain\_ID\_List and the Switch has a non-zero Domain\_ID\_List (i.e., it has received a Domain\_ID), the Switch shall retain its current lowest Switch\_Priority||Switch\_Name value as the lowest value, without comparing with the received value. The Switch shall send AAI to the Switch from which it received the zero Domain\_ID\_List as described in 7.4.1.
- l) If the Switch receives in an EFP Payload a zero Domain\_ID\_List and the Switch has a zero Domain\_ID\_List, and the received Switch\_Priority||Switch\_Name is lower than its current retained value, it shall discard the old value and retain the new value. The Switch shall also note from which E\_Port it received the new value, for potential use as the upstream Principal ISL during address distribution.
- m) The Switch shall communicate its retained Switch\_Priority||Switch\_Name to all E\_Ports that it has not yet communicated that value. The Switch shall accomplish this either by originating a new EFP request Sequence, or by an SW\_ACC reply Sequence to a received EFP request.
- n) If the switch receives a new lower value of Switch\_Priority||Switch\_Name before it has had a chance to communicate a prior lower value to all other E\_Ports, it shall not attempt to communicate the prior value, and shall instead attempt to communicate the new value. The Switch shall not abort or otherwise abnormally terminate an existing EFP Exchange originated by the Switch for the sole reason of the value of Switch\_Priority||Switch\_Name being adjusted lower prior to the completion of the Exchange.
- o) The Switch shall always return the lowest known value of Switch\_Priority||Switch\_Name in a SW\_ACC reply Sequence to an EFP request Sequence.
- p) If the Domain\_ID\_List of the Switch is non-zero, and the Domain\_ID\_List in a received EFP Payload is non-zero, and if there are no corresponding records in the Domain\_ID\_Lists set to the same Domain\_ID value, then the E\_Port shall request a non-disruptive Fabric Configuration, as described above.

- q) If the Domain\_ID\_List of the Switch is non-zero, and the Domain\_ID\_List in a received EFP Payload is non-zero, and if any corresponding records in the Domain\_ID\_Lists are set to the same Domain\_ID value, then the E\_Port shall not continue with Fabric Configuration, and shall become Isolated, as described in 7.5.
- r) If the retained value of Switch\_Priority||Switch\_Name does not change for twice F\_S\_TOV, and if the retained value of Switch\_Priority is equal to 0xFF, then there is no Switch capable of becoming a Principal Switch. The Switch shall cause all E\_Ports to become Isolated, as described in 7.5.
- s) If the retained value of Switch\_Priority||Switch\_Name does not change for twice F\_S\_TOV, and if the retained value of the Switch\_Priority||Switch\_Name is equal to the value of the Switch, then the Switch has become the Principal Switch.
- t) If the Switch receives an AAI request Sequence, then a Principal Switch has been selected. The Switch shall request a Domain\_ID as described in 7.4.
- u) The Switch shall continue to process and generate EFP requests as appropriate until it either: determines that it has become Isolated from all other Switches; or, it receives or initiates a BF or RCF request (which restarts the selection process).

At the completion of this process, all Switches other than the Principal Switch shall retain knowledge of the E\_Port through which was received the lowest value of Switch\_Priority||Switch\_Name. This E\_Port is the start of the first ISL in the path to the Principal Switch for the Switch; this ISL is called the upstream Principal ISL.

## 7.4 Address Distribution

Once a Principal Switch (Domain Address Manager) has been selected, Switches may request a Domain\_ID. The Principal Switch shall assign all Domain\_IDs. All other Switches shall request Domain\_IDs from the Principal Switch.

### 7.4.1 Domain\_ID Distribution by the Principal Switch

The Principal Switch shall conduct Domain\_ID distribution as follows:

- a) At the completion of Principal Switch Selection, the Principal Switch shall assume the role of Domain Address Manager. The Principal Switch shall set its Switch\_Priority value to hex'02', if the current value of its Switch\_Priority is less than or equal to hex '02'. The Principal Switch shall empty its Domain\_ID\_List. These actions shall not cause an EFP request to be generated as described in item "i" below.
- b) The Principal Switch shall then grant itself one (or more) Domain\_ID from the pool of available Domain\_IDs. This pool is maintained by the Principal Switch. If the Principal Switch had a specific Domain\_ID prior to the Reconfiguration Event, it shall grant itself that Domain\_ID. This action shall cause an EFP request to be generated as described in item "i" below.
- c) The Principal Switch shall then transmit an AAI SW\_ILS request Sequence via all E\_Ports. After receiving the SW\_ACC reply, the Principal Switch may receive one or more RDI SW\_ILS request Sequences via one or more of the E\_Ports.
- d) When the Principal Switch receives an RDI SW\_ILS request Sequence with a non-zero requested Domain\_ID, in the absence of any error condition preventing it, it shall allocate the requested Domain\_ID(s) to the requesting Switch, if available. If the requested Domain\_ID is not available or is zero, it shall grant an available Domain\_ID to the requesting Switch. This Domain\_ID is communicated to the Switch by transmitting the SW\_ACC reply Sequence via the E\_Port on which the corresponding RDI request Sequence was received.
- e) The Principal Switch shall not grant the same Domain\_ID to more than one requesting Switch.
- f) If the Principal Switch receives an RDI request for the same requested Domain\_ID as it granted to that Switch in a previous RDI request received after Principal Switch Selection, it shall not be considered an error; the Principal Switch shall grant the Domain\_ID to the Switch. If a Switch that has al-

ready been granted a Domain\_ID transmits a request to the Principal Switch for a different Domain\_ID, the Principal Switch shall transmit BF or RCF, as appropriate.

- g) If the Principal Switch receives an RDI request and no appropriate Domain\_IDs are available, the Principal Switch shall return SW\_RJT with a reason/explanation of: "Unable to perform command request", "Domain\_ID not available".
- h) All Principal ISLs via which the Principal Switch receives RDI requests shall be downstream Principal ISLs.
- i) Each time the Principal Switch grants a Domain\_ID to a Switch (including itself), it shall transmit an EFP SW\_ILS request Sequence via all E\_Ports, with each record in the Domain\_ID\_List corresponding to a granted Domain\_ID set to the Switch\_Name granted the Domain\_ID. An example of this process is illustrated in Figure 12.

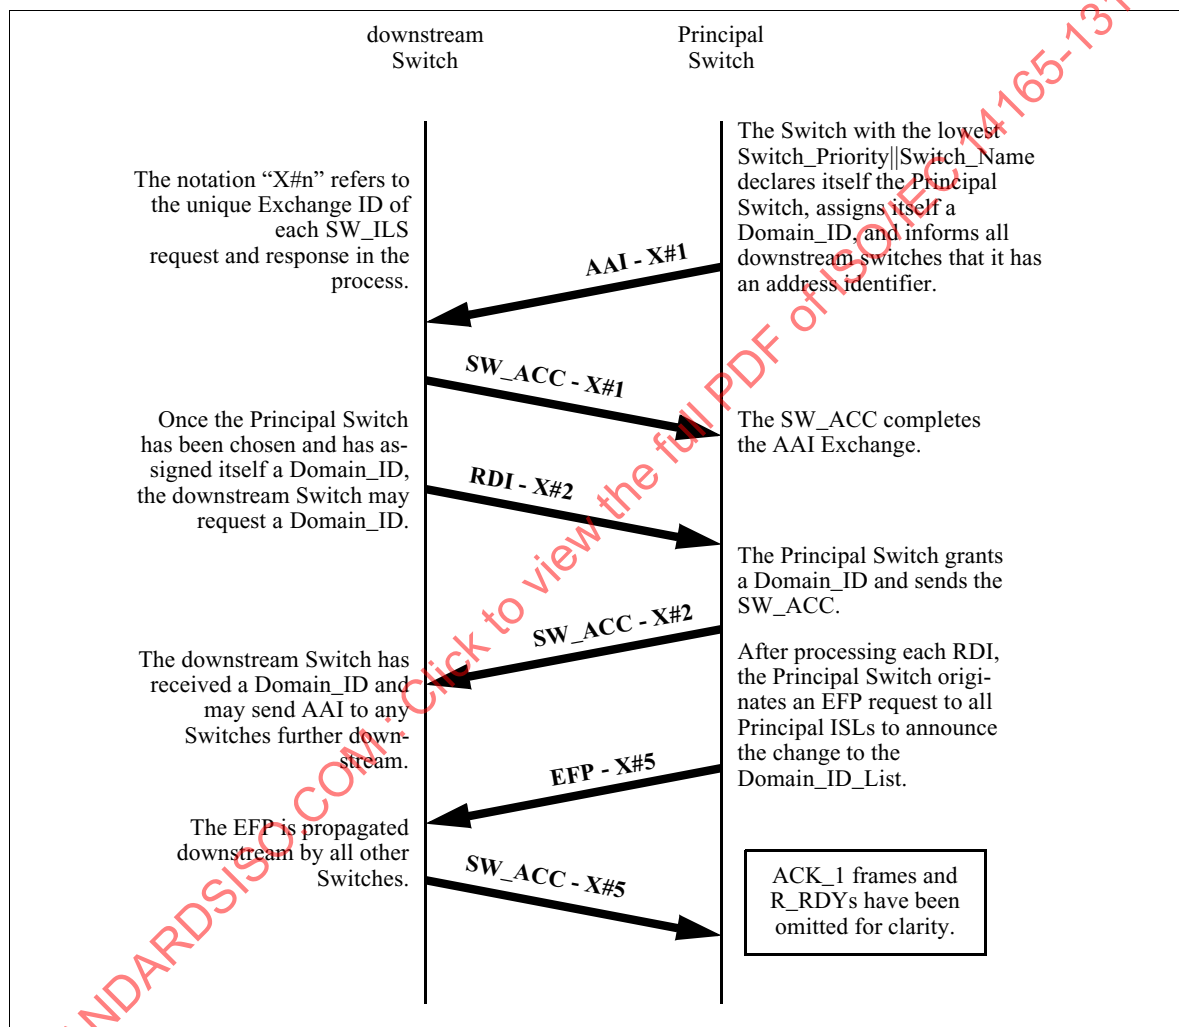


Figure 12 – RDI Request Processing by Principal Switch

#### 7.4.2 Domain\_ID Requests by the Switches

The Switches shall request a Domain\_ID as follows:

- a) At the completion of Principal Switch Selection, the Switch receives the AAI SW\_ILS request Sequence via the upstream Principal ISL, and shall reply to the request with the appropriate SW\_ACC or other response. The Switch shall set its Switch\_Priority value to a value greater than hex'02'. An AAI request Sequence received on any other ISL shall be replied to with the appropriate SW\_ACC or other response, but shall otherwise be ignored. The AAI request received via the upstream Principal ISL is the indication that the Principal Switch has assigned a Domain\_ID to all Switches between the Principal Switch and the Switch receiving the AAI request.

- b) After transmitting an SW\_ACC reply to the AAI request, the Switch shall transmit an RDI request Sequence via the upstream Principal ISL. When the Switch receives the reply SW\_ACC to the RDI request, it shall assign address identifiers to all Ports within its Domain as appropriate.
- c) After the Switch is granted a Domain\_ID, it shall then transmit an AAI SW\_ILS request Sequence via all ISLs other than the Principal ISL. After receiving the SW\_ACC reply, the Switch may receive one or more RDI SW\_ILS request Sequences from one or more of the E\_Ports.
- d) All Principal ISLs via which the Switch receives RDI requests shall be downstream Principal ISLs.
- e) When the Switch receives an RDI request Sequence from one of its E\_Ports via a downstream Principal ISL, it shall originate an RDI request Sequence with the same Payload via its upstream Principal ISL. When the reply SW\_ACC is received via the upstream Principal ISL, it shall transmit an SW\_ACC reply Sequence via the downstream Principal ISL on which the initial request was received. An example of this process is illustrated in Figure 13.

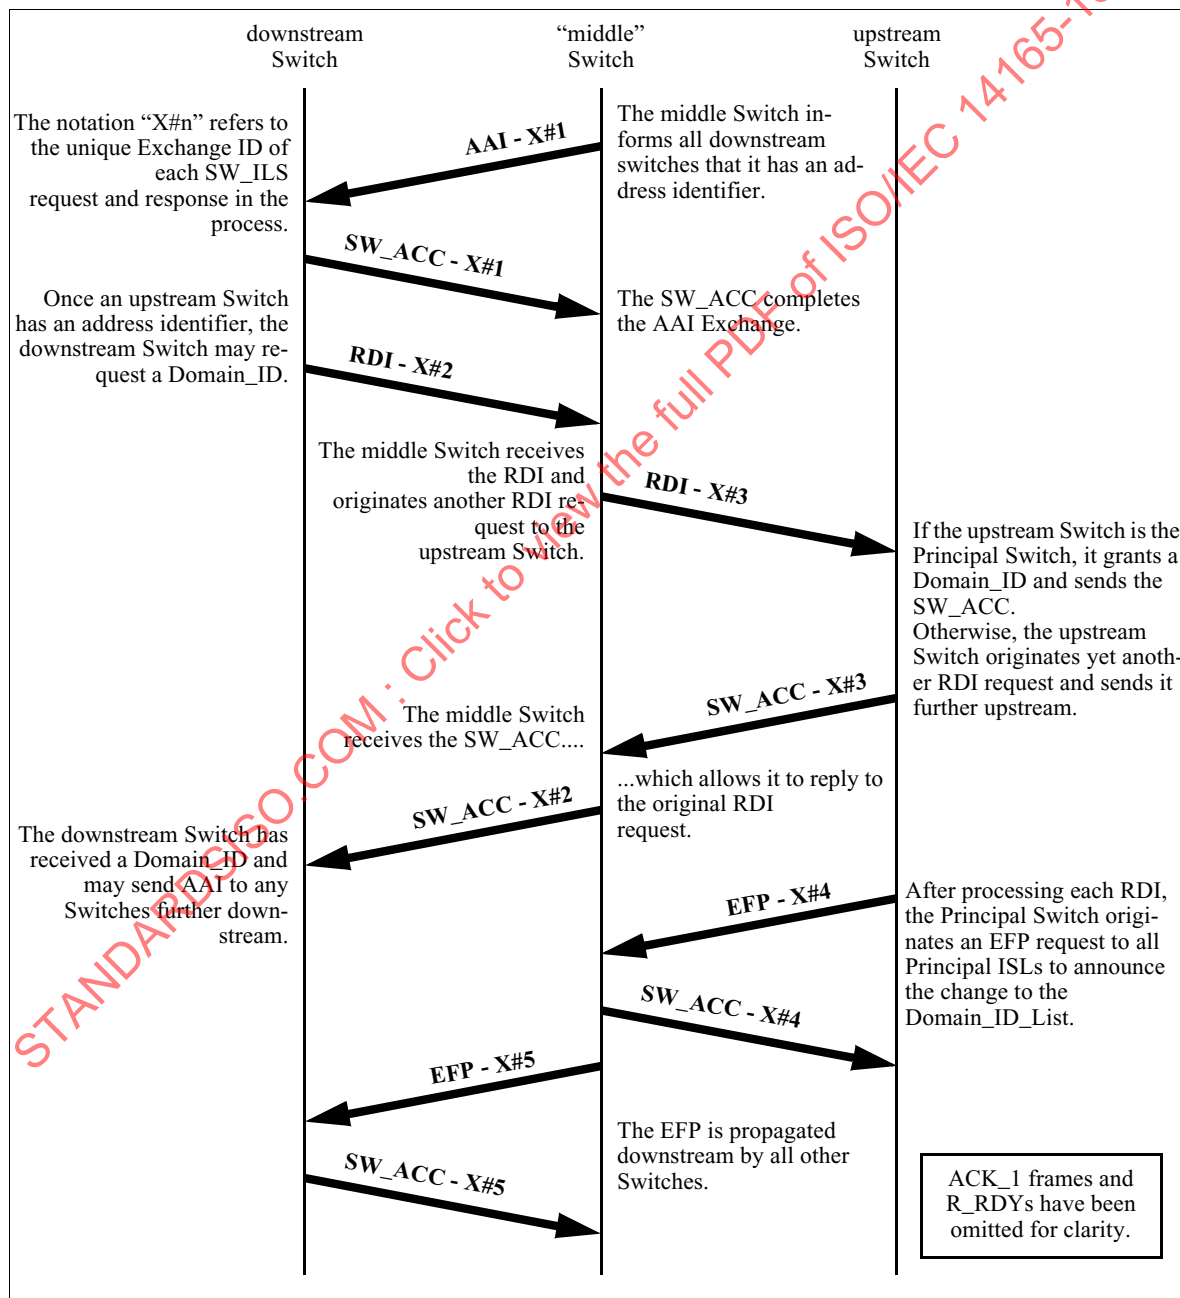


Figure 13 – RDI Request Processing by non-Principal Switch

## 7.5 E\_Port and Fabric Isolation

An E\_Port connected via an Inter-Switch Link to another E\_Port may determine that it cannot communicate with the other E\_Port for one of the reasons listed below.

- a) The two E\_Ports have incompatible Link Parameter requirements. For example, if one Switch has an E\_D\_TOV setting different than another, Class 2 frames sent by an N\_Port on one Switch may not receive timely F\_BSY responses from the other Switch. If an Isolated E\_Port receives an RCF SW\_ILS, it may retry Switch Port Initialization to see if better Link Parameters have become available.
- b) Similarly, the two E\_Ports have incompatible Fabric Parameter requirements. For example, if an E\_Port receives an EFP that contains records it does not support, it shall Isolate.
- c) The two E\_Ports are a new Link between two existing Fabrics, and the Domain\_ID allocations in each Fabric overlap. For example, if each existing Fabric had allocated Domain\_ID hex'44' to a Switch, one Switch would have to give up its Preferred Domain\_ID to reconfigure; this could cause a major disruption to current traffic.
- d) The two E\_Ports are a Link between Switches that are not capable of performing the Domain Address Manager function, and are each also not attached via an ISL to any other Switch capable of performing the Domain Address Manager function. Since no Switch can allocate Domain\_IDs, no Class N frames can be sent between the Switches.

When any of the above conditions occurs, the E\_Port shall Isolate itself from the other E\_Port. The following is a list of appropriate Class F frames that may be communicated between Isolated E\_Ports.

- An ELP SW\_ILS request may be sent by an Isolated E\_Port in an attempt to establish a working set of Link Parameters.
- An RCF SW\_ILS request may be sent by an Isolated E\_Port to begin a disruptive Reconfiguration in an attempt to build a single, non-isolated Fabric.
- An SW\_ACC response may be sent in response to any of the above SW\_ILS requests.
- An SW\_RJT response may be sent in response to any of the above SW\_ILS requests, if necessary, and shall be sent as the appropriate response to any other SW\_ILS request not listed above.

The buffer-to-buffer credit between the Isolated E\_Ports shall be a value of one; no alternate credit shall be in effect. No routing of Class N frames shall occur across the ISL.

If it is still desired to create a single Fabric via Isolated E\_Ports, a Switch may override the Isolated condition by originating an RCF SW\_ILS request Sequence via the appropriate ISL. The RCF shall force the selection of a single Principal Switch from within the previously Isolated Fabrics.

## **Annex A**

(informative)

### **Future Projects**

#### **A.1 Switch Standards in development**

At the time of publication of this standard, FC-SW-2 development had begun. FC-SW-2 is expected to standardize the following additional functions.

- path selection;
- ISL flow control management;
- distributed services;
- multicast.

Contact ISO/IEC JTC 1 for the latest status on FC-SW-2.

#### **A.2 Switch Technical Reports in development**

At the time of publication of this standard, no Switch Technical Reports were in development. Contact ISO/IEC JTC 1 for the latest status.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 14165-131:2000



## Annex B (informative)


### Examples of Switch Port Initialization

#### B.1 Examples Overview

This annex presents some example scenarios that may occur during Switch Port Initialization. It is expected that the reader is familiar with Loop Initialization as defined in FC-AL, and with Link Initialization as defined in FC-PH.

#### B.2 Example 1: two E/F/FL\_Port-capable Switch Ports

In this example, two Switch Ports that are E/F/FL\_Port-capable are attached to each other. Figure B.1 illustrates this example.

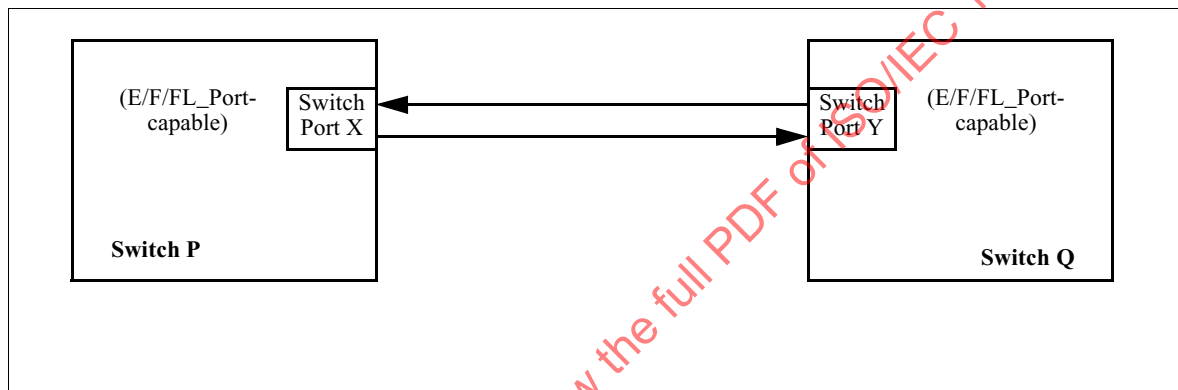

**Figure B.1 – Initialization example 1**

According to the initialization algorithm, since each Switch Port is E/F/FL\_Port-capable, they start the process with Loop Initialization, as defined in FC-AL. LIP Primitive Sequences are sent and received, and each Switch Port starts sending LISM frames. When Switch Port X receives LISM from Switch Port Y, it sees that its Port\_Name is lower than the Port\_Name in the Payload, and continues sending the same LISM.

On the other hand, when Switch Port Y receives LISM from Switch Port X, it sees that its Port\_Name is higher than the Port\_Name in the Payload. This causes Switch Port Y to start sending the LISM it received, with the Port\_Name belonging to Switch Port X. Switch Port Y also transitions to the MONITORING state in non-participating mode, because only one FL\_Port may be participating on a loop.

Switch Port X receives its LISM and assumes the role of Loop Master. Switch Port X then proceeds to send all of the other Loop Initialization Sequences, and by the end of Loop Initialization, discovers that it is the only L\_Port on the loop. Because there may be a non-participating Switch Port on the Loop, Switch Port X knows it must attempt Link Initialization.

Switch Port X begins Link Initialization by sending the OLS Primitive Sequence. Switch Port Y needs to be looking for FC-PH Primitive Sequences (OLS, NOS, LR, LRR) to transition from the FL\_Port operating mode to E/F\_Port mode. The Link protocol continues to completion and a point-to-point Link is now Active.



Switch Port X and Switch Port Y may now attempt to Exchange Link Parameters and establish an Inter-Switch Link.

### B.3 Example 2: two E/F/FL\_Port-capable Switch Ports and one Nx\_Port

In this example, two Switch Ports that are E/F/FL\_Port-capable are attached to each other as in the first example, but there is also an Nx\_Port on the loop. Figure B.1 illustrates this example.

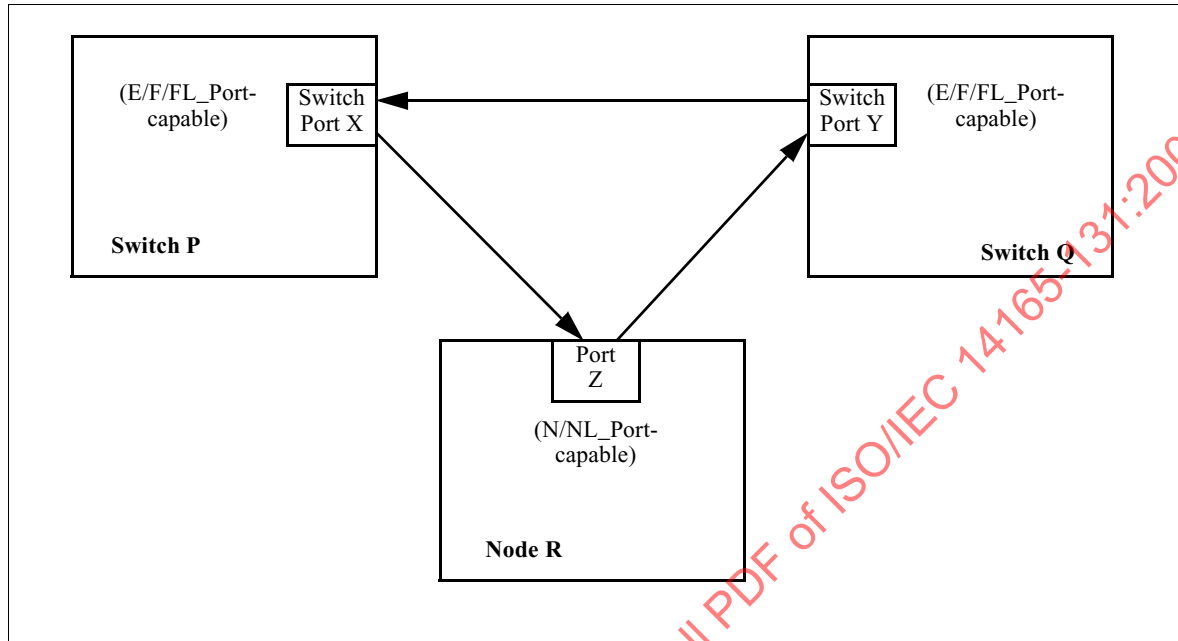


Figure B.2 – Initialization example 2

According to the initialization algorithm, since each Switch Port is E/F/FL\_Port-capable and Port Z is N/NL\_Port-capable, they start the process with Loop Initialization, as defined in FC-AL. LIP Primitive Sequences are sent and received, and each Switch Port and the Nx\_port start sending LISM frames. As in the first example, Switch Port X receives LISM from Switch Port Y, it sees that its Port\_Name is lower than the Port\_Name in the Payload, and continues sending the same LISM.

When Port Z receives the LISM from Switch Port X, it finds a D\_ID of zero, meaning that the originator is an FL\_Port. Since an FL\_Port always wins Loop Master, the NL\_Port continues sending the received LISM from Switch Port X.

When Switch Port Y receives Switch Port X's LISM from Port Z, it sees that its Port\_Name is higher than the Port\_Name in the Payload. This causes Switch Port Y to start sending the LISM it received, with the Port\_Name belonging to Switch Port X. Switch Port Y also transitions to the MONITORING state in non-participating mode, because only one FL\_Port may be participating on a loop.

Switch Port X receives its LISM and assumes the role of Loop Master. Switch Port X then proceeds to send all of the other Loop Initialization Sequences, and by the end of Loop Initialization, discovers that there is only one other L\_Port on the loop. Because that one other port may be capable of point-to-point operation, Switch Port X knows it must attempt Link Initialization.


Switch Port X begins Link Initialization by sending the OLS Primitive Sequence. If Port Z recognizes the OLS and reacts to it, it will send LR in response. Switch Port Y is looking for FC-PH Primitive Sequences (OLS, NOS, LR, LRR) to transition from the FL\_Port operating mode to E/F\_Port mode, and therefore sends LRR in response to the received LR. Because receiving LRR in response to OLS is not part of the protocol, Switch Port X will continue to send OLS until it times out. The Link Initialization has failed.

When Link Initialization fails, there is nothing to do other than to go back and re-do the Loop Initialization. The Loop Initialization succeeds, and Switch Port X operates as an FL\_Port, and Port Z operates as an NL\_Port. Switch Port Y stays non-participating until a system administrator comes to save it from oblivion.

Note that if Port Z had been bypassed, the process would have completed as in Example 1, because the Primitive Sequences would have been ignored by Port Z. At a later time, if Port Z then comes out of the bypass state, an Initialization Event occurs (Port Z starts sending LIP to get an AL\_PA), and things sort themselves out as described for Example 2. If Switch Port Y had been bypassed, then Switch Port X would have become an F\_Port in a point-to-point Link with N\_Port Z.

#### B.4 Example 3: one E/F/FL\_Port-capable Port and one E/F\_Port-capable Port

In this example, a Switch Port that is E/F/FL\_Port-capable is attached to a Switch Port that is E/F\_Port-capable. Figure B.1 illustrates this example.

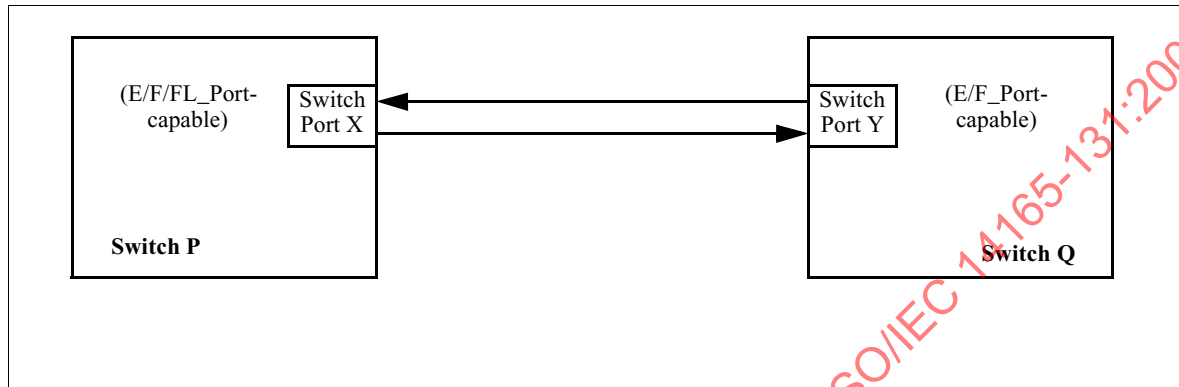

**Figure B.3 – Initialization example 3**

According to the initialization algorithm, the Switch Port that is E/F/FL\_Port-capable starts the process with Loop Initialization as defined in FC-AL. However, the Switch Port that is E/F\_Port-capable starts the process with Link Initialization as defined in FC-PH. Switch Port X sends LIP Primitive Sequences, and Switch Port Y sends OLS Primitive Sequences. This represents a stand-off, in which each Switch Port does not respond in the manner that the other is requesting.

Fortunately, Switch Port X will eventually timeout and attempt Link Initialization. When Switch Port X starts sending OLS, will respond with LR, and the Link protocol continues to completion and a point-to-point Link is now Active.

Switch Port X and Switch Port Y may now attempt to Exchange Link Parameters and establish an Inter-Switch Link.

## **Annex C**

(informative)

### **Fibre Channel Link Switch Command Set for FC-AE**

#### **C.1 Scope**

The purpose of this annex is to document a standardized command set for the control of the Fibre Channel "link switch". This annex was defined for the FC-AE (Avionics Environment).


#### **C.2 Technical Description**

##### **C.2.1 Definition**

Link Switch: A unit, externally controlled, capable of rearranging and steering Fibre Channel links.

##### **C.2.2 Context**

Figure C.1 shows the software context for the command set described by this document; and Figure C.2 through Figure C.6 show examples of a system context. In these figures, it is intended to not require a great deal of intelligence on the part of the switch hardware, so that this could conceivably be constructed with hardware logic only; i.e., it is intended to allow for implementations that do not include a micro-controller as part of the link switch hardware.

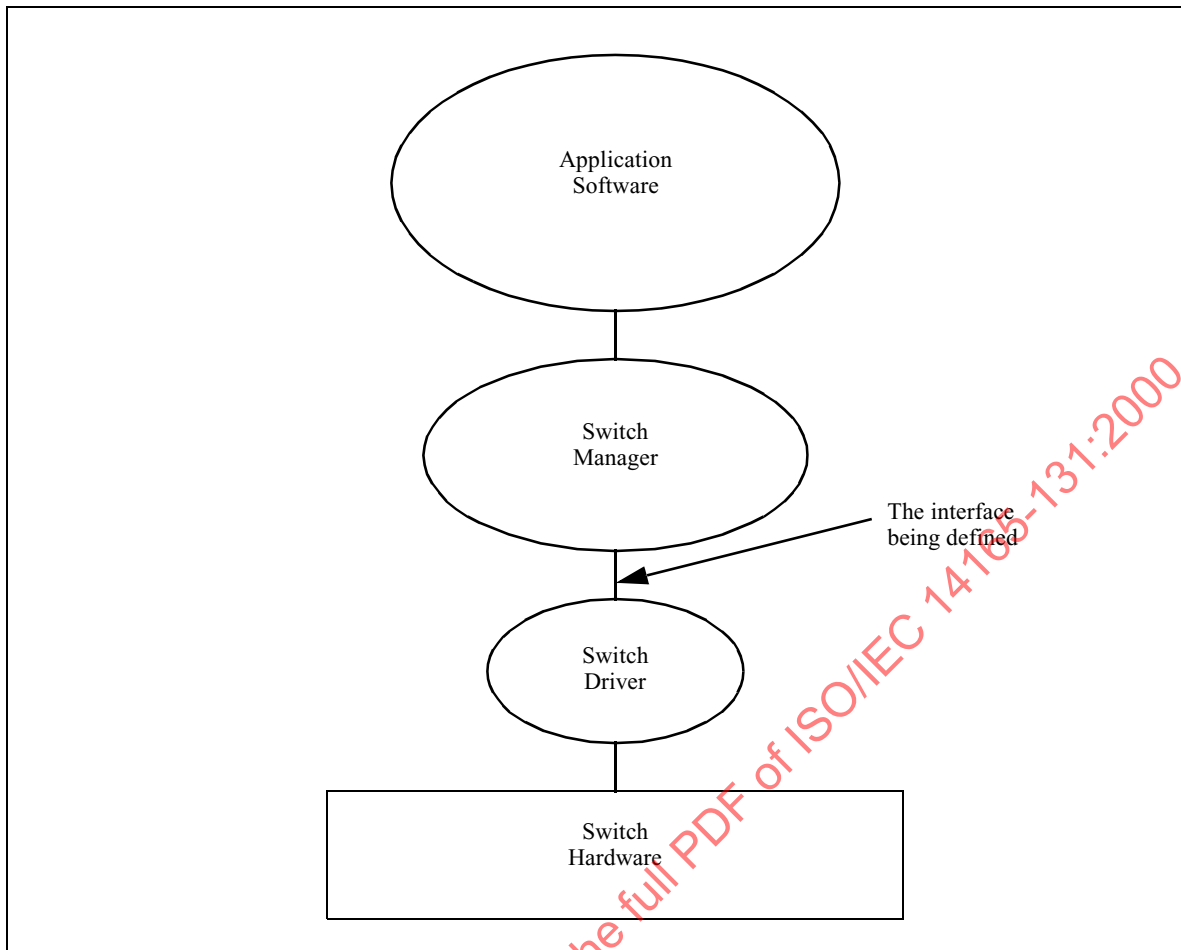

**Figure C.1 – Software Context for Link Switch Control**

The command set described in C.2.3 is intended to be independent of the transmission medium that is used to transfer the command information to the hardware switch itself. Figure C.2 and Figure C.3 show examples of out-of-band link switch control. Figure C.2 shows an example in which this medium could be a serial (or parallel) point-to-point connection between the link switch control element and the link switch hardware. Figure C.3 shows an example in which this medium could be a parallel (or serial) multi-drop bus connection between the link switch hardware and multiple controlling entities that are parts of the same nodes that contain the serial ports that are to be switched. Figure C.4 shows an example in which the control information is passed over the same physical medium that is used for the transfer of the high-speed serial data that is being switched.

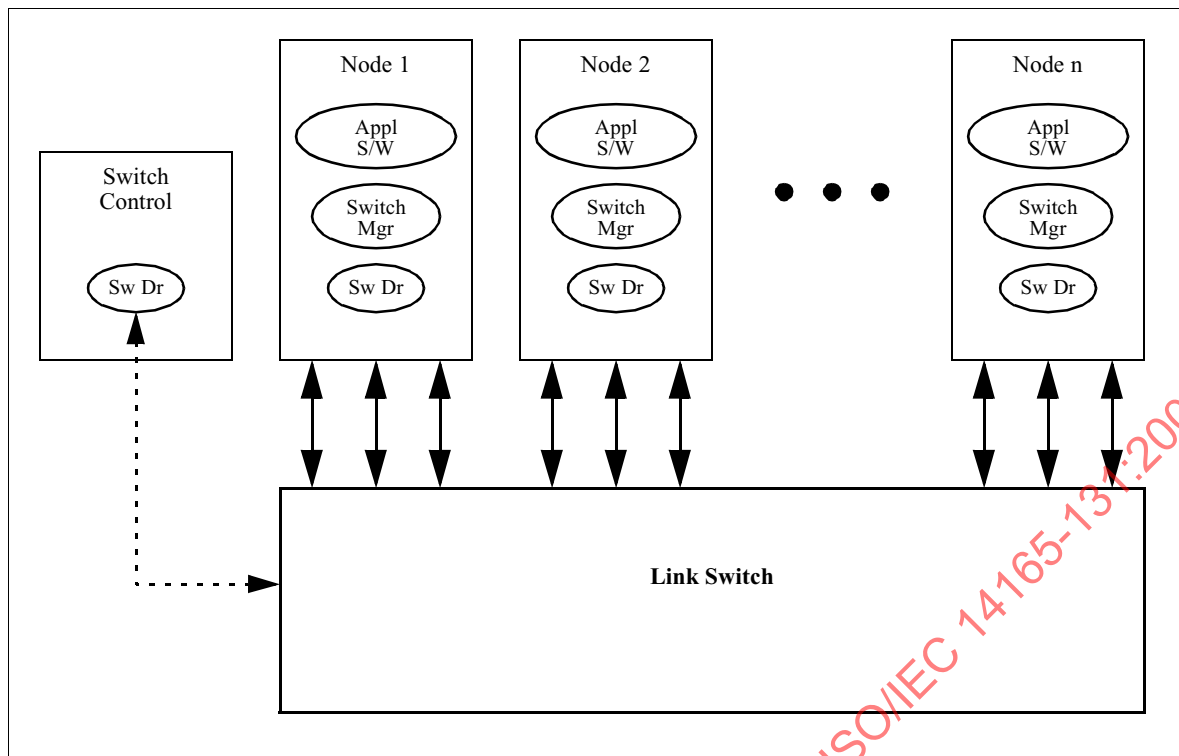


Figure C.2 – Example 1 of System Context With Out-of-Band Control


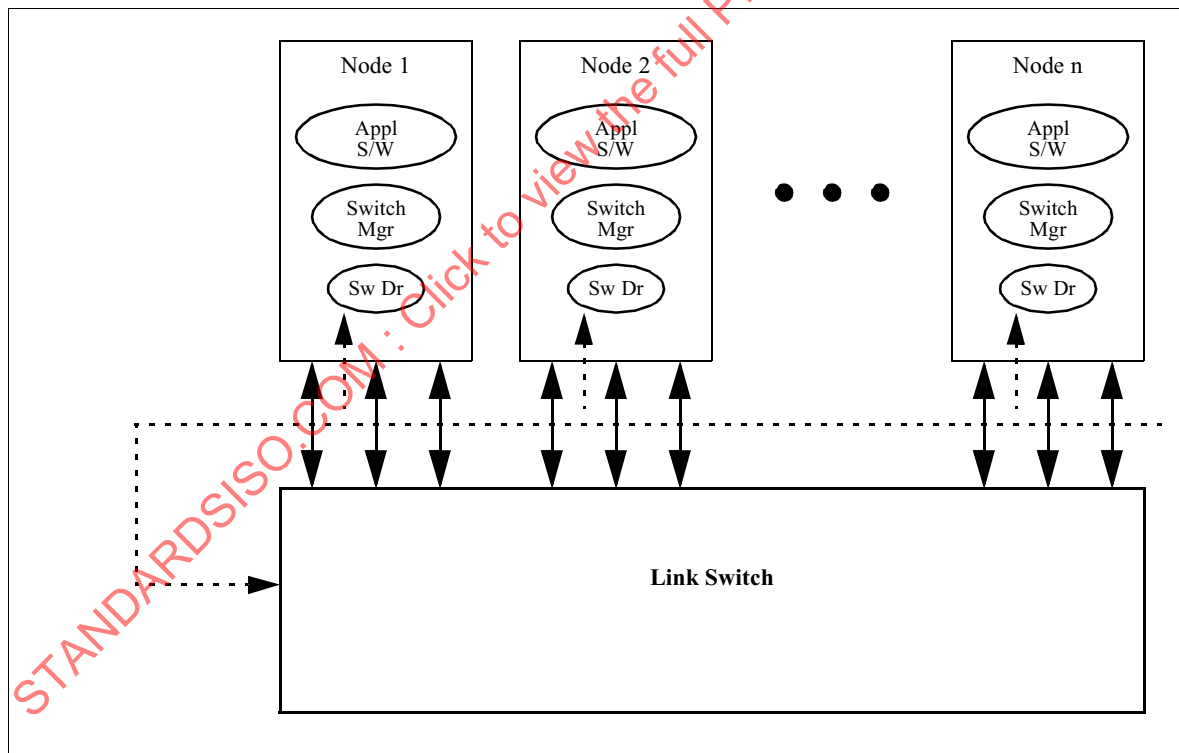



Figure C.3 – Example 2 of System Context With Out-of-Band Control

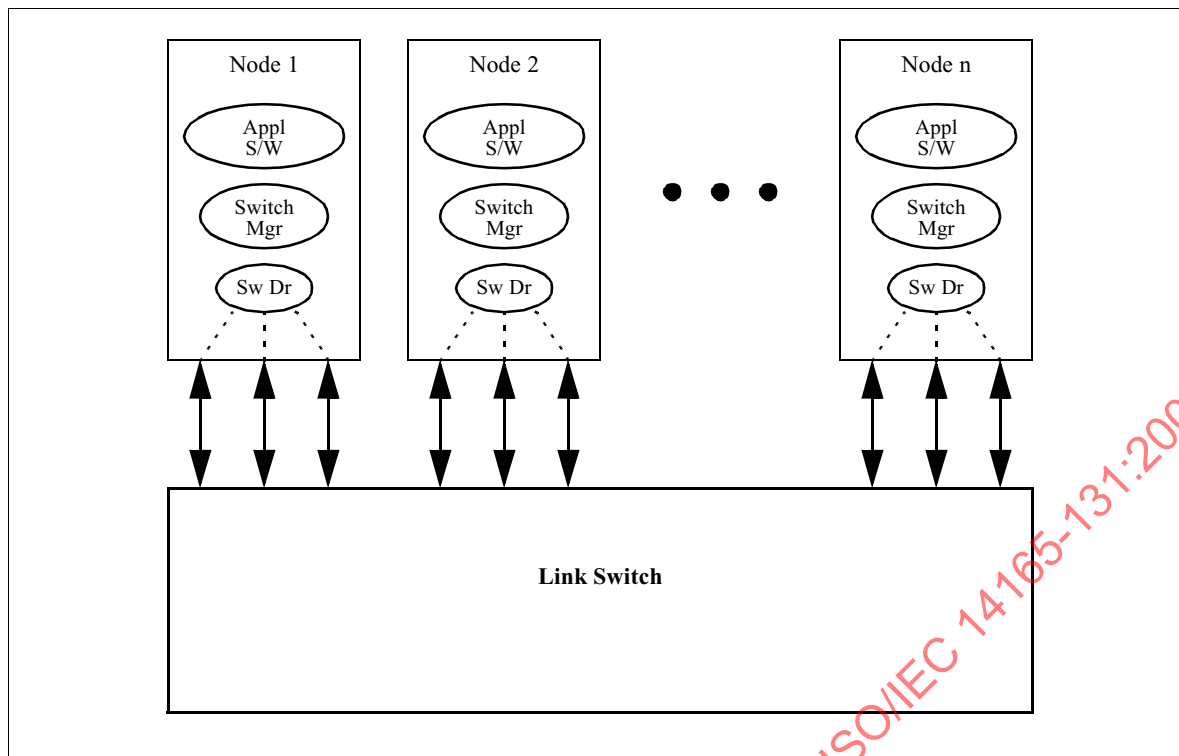


**Figure C.4 – Example of System Context With in-Band Control**

In all of the examples that show control of the link switch as being accomplished by a distributed switch manager/switch driver, it should be noted that the control issues for this configuration have not been resolved.

The command set of C.2.3 is intended to support system configurations in which multiple link switch elements are used, as illustrated in Figure C.5 and Figure C.6. In these systems, it is assumed that the system-level link switch topology is handled by the Switch Manager, not by the Switch Driver; and is therefore beyond the scope of this document. The Switch Manager (whether centralized or distributed) is responsible for resolving any conflicts over requests for switch connections.

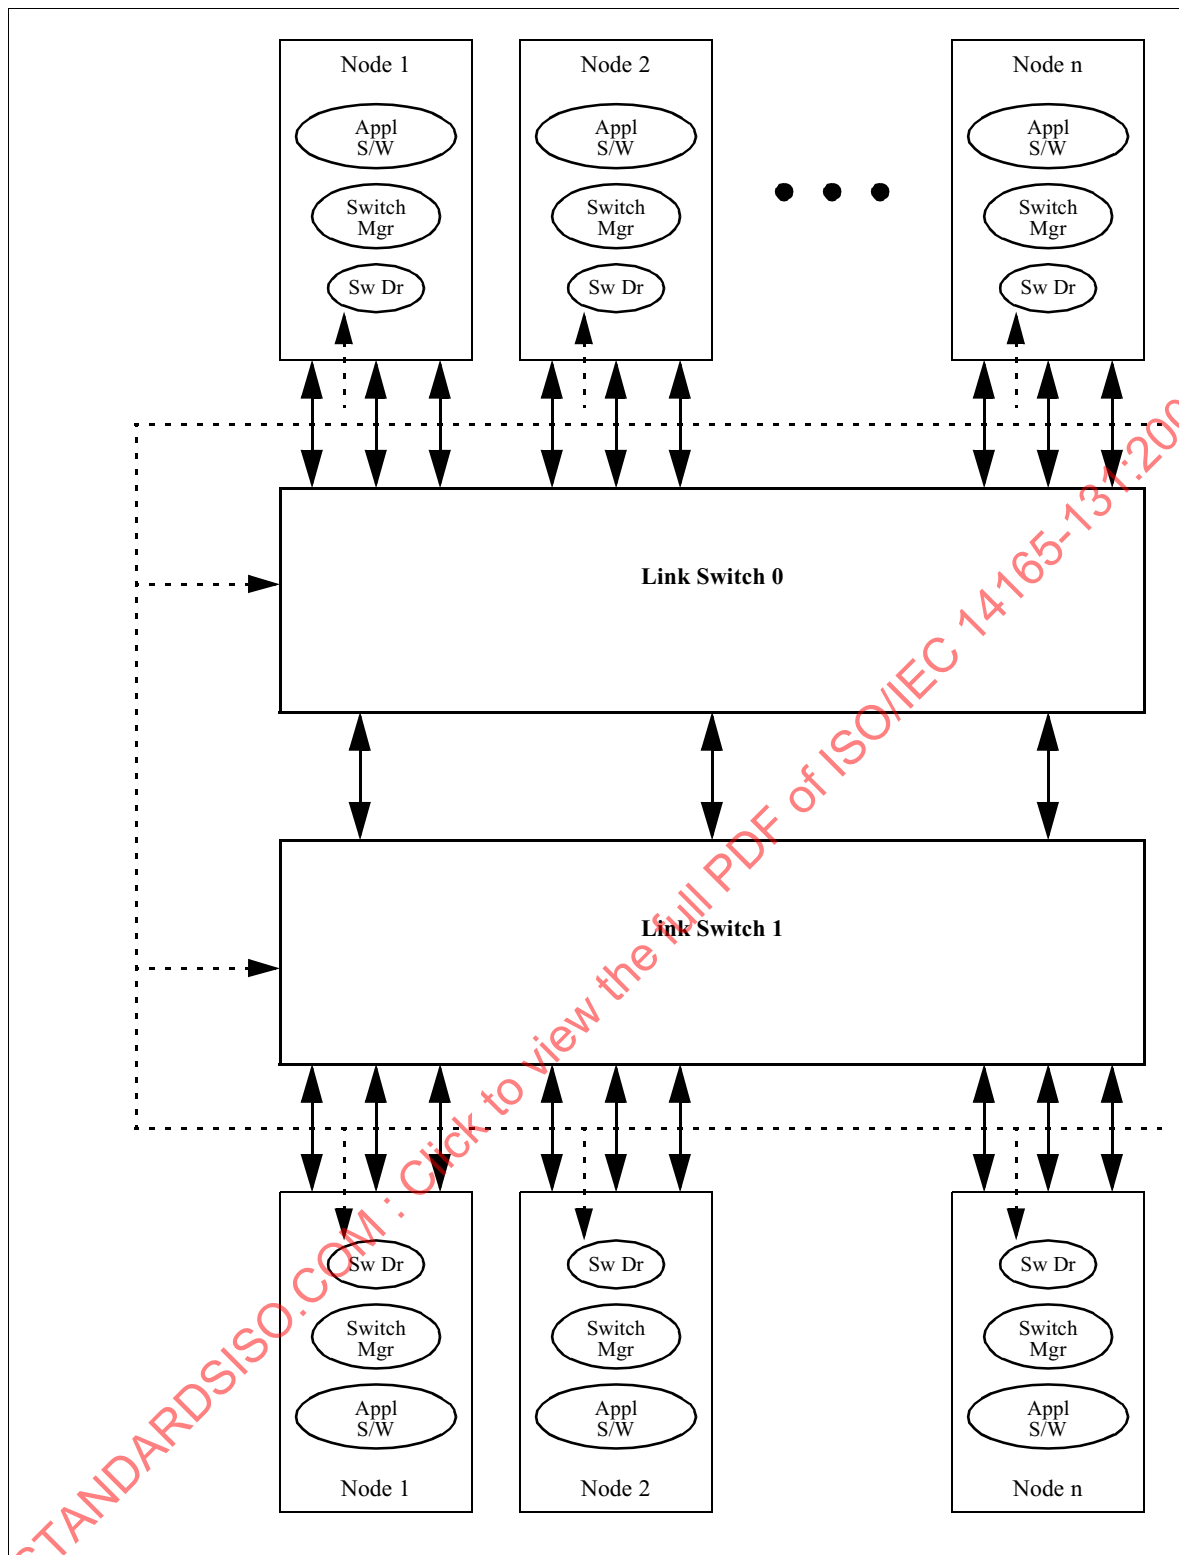

**Figure C.5 – Example 3 of System Context With Out-of-Band Control**

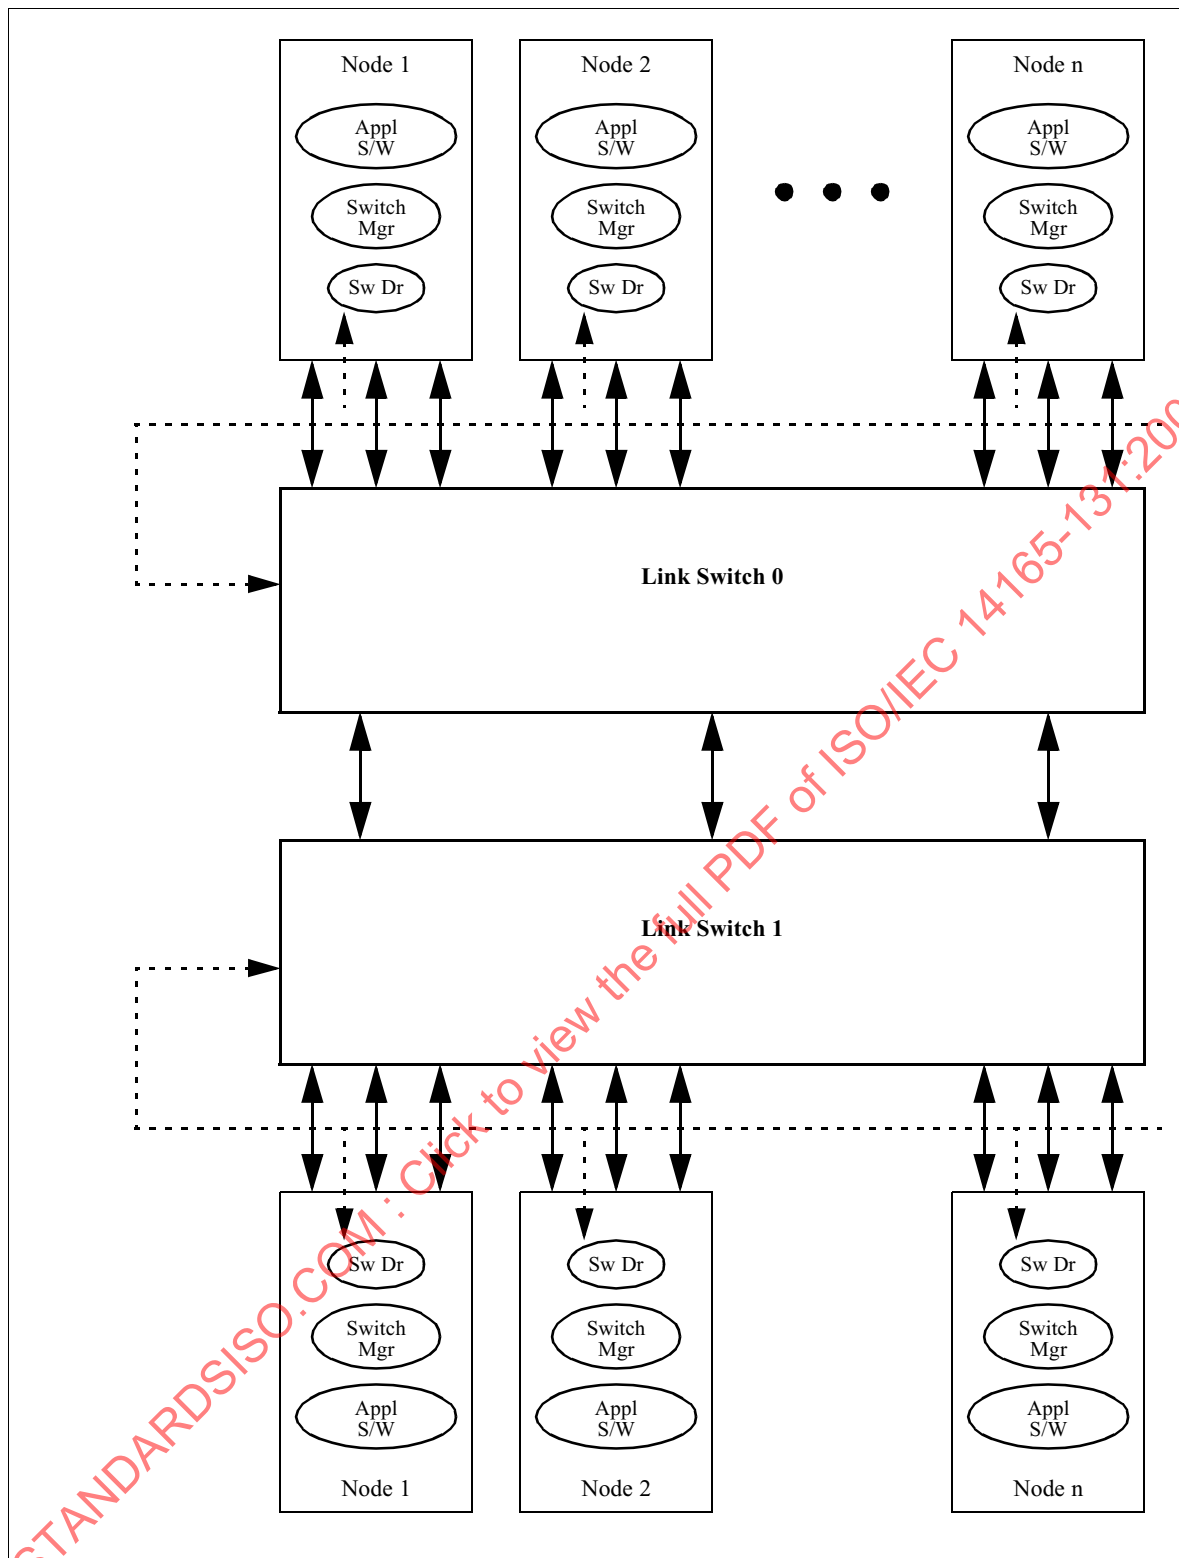

**Figure C.6 – Example 4 of System Context With Out-of-Band Control**

Conceptually, the link switch itself (or the switch driver, as appropriate) maintains a status indicator for each output port and each path within the link switch. This information is made available to the user as status information.

Depending on the link switch design, there may be more than one path available within the link switch for connecting a given output port to a given input port. No path identification parameters have been provided for in the following subprograms, since it was felt that these would be highly variable from switch design to switch design. Instead, it was assumed that the Switch Driver was free to use any available path to make the connection.



It was envisioned that some very low end link switches might require changing existing path connections in order to be able to establish a requested new connection. Because this would disrupt the existing connections, though, two separate procedures are provided -- one that allows existing paths to be modified, and one that does not.

Because the initial concept of the link switch was of a low-end, inexpensive switch; no built-in diagnostic capability was assumed for the switch itself. Instead, it was assumed that the link switch (hardware or associated Switch Driver) would maintain a marking for each path as to whether that path was usable. But it was assumed that a higher-level entity would indicate to the Switch Driver whether and when a path had been found to be unusable (by calling the appropriate procedure). This path health information would be maintained by the Switch Driver or the link switch hardware.

### C.2.3 Command Set

This section contains a definition of the standardized driver services. The description uses Ada as the design language.

package LINK\_SWITCH\_DRIVER is

---

-- Definitions

---

- INPUT : There are two possible points of view for the term
  - "input". One is from the view of the link switch, and the
  - from the view of an attached Fibre Channel N\_PORT. The
  - default use of the term "input" in this package will be
  - from the view of the link switch; ie, "input" refers to the
  - "input" of the link switch. In those cases where the view is
  - intended to be from the N\_PORT, the term "N\_PORT" will be
  - explicitly included, eg. N\_PORT\_INPUT.
  
  - OUTPUT : Similarly to the term "input", the default use of the
  - term "output" will be from the view of the link switch; ie, "output"
  - refers to the "output" of the link switch. In those cases where
  - the view is intended to be from the N\_PORT, the term "N\_PORT"
  - will be explicitly included, eg. N\_PORT\_OUTPUT.
  
  - PORT : The term "port" in this package is used to refer to
  - an individual serial signal point of connection to a link switch.
  - This is distinguished from the term "N\_PORT".
  
  - INPUT PORT : Consistent with the preceding definitions, an
  - input port is an individual serial signal point of connection
  - to a link switch that carries information into the switch. It does
  - NOT refer to the signal line that carries information into
  - an N\_PORT.
  
  - OUTPUT PORT : Consistent with the preceding definitions, an
  - output port is an individual serial signal point of connection
  - to a link switch that carries information into the switch. It does
  - NOT refer to the signal line that carries information out of
  - an N\_PORT.
  
  - N\_PORT : The term "N\_PORT" in this package is used in the
  - Fibre Channel sense to refer to a pair of oppositely-directed
  - serial signal points of connection at an end node that
  - generates and receives Fibre Channel-compliant signals.
-

```

--
--          LINK SWITCH CONFIGURATION PARAMETERS          --
--
--
-----

```

```

--
-- The MAX_SWITCHES is to be set to the highest-valued address
-- accepted by the switch hardware. It is assumed that the switch
-- addresses will range from 0 to (MAX_SWITCHES - 1).
--

```

```

MAX_SWITCHES : constant INTEGER := (configuration dependent);

```

```

--
-- The NUMBER_OF_INPUT_PORTS and NUMBER_OF_OUTPUT_PORTS are
-- configuration parameters for the system that contains the
-- link switch. The NUMBER_OF_PORTS is also a configuration
-- parameter. Its value is to be derived as follows:
--

```

```

-- NUMBER_OF_PORTS := max(NUMBER_OF_INPUT_PORTS, NUMBER_OF
--                          OUTPUT_PORTS)
--

```

```

-- It is assumed that the port numbers range from 0 to
-- (NUMBER_OF_INPUT_PORTS - 1), and 0 to (NUMBER_OF_OUTPUT_PORTS - 1),
-- respectively.
--

```

```

NUMBER_OF_INPUT_PORTS : constant INTEGER := (configuration dependent);
NUMBER_OF_OUTPUT_PORTS: constant INTEGER := (configuration dependent);
NUMBER_OF_PORTS       : constant INTEGER := (configuration dependent);

```

```

--
-- The MAX_N_PORTS parameter is to be set to the highest number of
-- N_PORTS that the user intends to define.
--

```

```

MAX_N_PORTS : constant INTEGER := (configuration dependent);

```

```

-----
--              Types and Constants              --
-----

--
-- In the PORT_TYPE, it is intended that the values
-- (0 .. (NUMBER_OF_PORTS - 1)) be used as identifiers of the ports
-- that are being switched; and the value (-1) be used when none of
-- the other values are appropriate (Eg. when a STATUS_OF function
-- wants to return a value that indicates that the port is
-- not currently connected to anything.) (See also the NULL_PORT
-- constant.)
--
type PORT_TYPE is range -1 .. (NUMBER_OF_PORTS - 1);

--
-- It is intended that the NULL_PORT constant be used rather than the
-- literal value when referring to the PORT_TYPE value of (-1).
--
NULL_PORT : constant PORT_TYPE := -1;

subtype INPUT_PORT_TYPE is PORT_TYPE
  range NULL_PORT .. (PORT_TYPE(NUMBER_OF_INPUT_PORTS) - 1);
subtype OUTPUT_PORT_TYPE is PORT_TYPE
  range NULL_PORT .. (PORT_TYPE(NUMBER_OF_OUTPUT_PORTS) - 1);

--
-- In the N_PORT_TYPE, it is intended that the values
-- (0 .. (MAX_N_PORTS - 1)) be used as identifiers of the N_PORTS
-- that are being switched; and the value (-1) be used when none of
-- the other values are appropriate (Eg. when a STATUS_OF function
-- wants to return a value that indicates that the port is
-- not currently connected to anything.) (See also the NULL_N_PORT
-- constant.)
--
type N_PORT_TYPE is range -1 .. (MAX_N_PORTS - 1);

--
-- It is intended that the NULL_N_PORT constant be used rather
-- than the literal value when referring to the N_PORT_TYPE value
-- of (-1).
--
NULL_N_PORT : constant N_PORT_TYPE := -1;

--
-- The SWITCH_ADDRESS_TYPE is used to distinguish among multiple
-- link switches in a system that are controlled via a common hardware
-- interface. It is intended that the values
-- (0 .. (MAX_SWITCHES - 1)) be used as identifiers of the switches;
-- and the value (-1) be used when none of the other values are
-- appropriate. (See also the NULL_SWITCH constant.)
--
type SWITCH_ADDRESS_TYPE is range -1 .. (MAX_SWITCHES - 1);

--
-- It is intended that the NULL_SWITCH constant be used rather
-- than the literal value when referring to the SWITCH_ADDRESS
-- _TYPE value of (-1).
--
NULL_SWITCH : constant SWITCH_ADDRESS_TYPE := -1;

--

```

-- The PORT\_STATE\_TYPE values refer to a designated (input or output) port on the link switch.

--

type PORT\_STATE\_TYPE is

(UNCONNECTED, -- The designated link switch port is not currently  
 -- connected to any other port. It is reachable  
 -- from at least some other port, but not  
 -- necessarily from all ports.

--

CONNECTED, -- The designated link switch port is currently  
 -- connected to another port.

--

REACHABLE, -- This status only applies in cases in which a  
 -- port of the opposite (input/output) type has  
 -- also been designated. The two ports can be  
 -- connected without changing any existing  
 -- connections.

--

REARRANGEABLE,-- This status only applies in cases in which a  
 -- port of the opposite (input/output) type has  
 -- also been designated. The two ports can be  
 -- connected; but such a connection will require  
 -- changing some existing connections.

--

UNREACHABLE, -- This status only applies in cases in which a  
 -- port of the opposite (input/output) type has  
 -- also been designated. The two ports cannot be  
 -- connected; but the subject port is still  
 -- REACHABLE from some port of the opposite type.

--

ISOLATED); -- The designated link switch port is not currently  
 -- connected to any other port; and cannot be  
 -- connected by any path in the link switch. (This  
 -- is an indication that at least one failure  
 -- has occurred in the link switch.)

--

-- The N\_PORT\_STATE\_TYPE values refer to a designated N\_PORT  
 -- connected to the link switch.

--

type N\_PORT\_STATE\_TYPE is

(UNCONNECTED, -- The designated N\_PORT is not currently  
 -- connected to any other N\_PORT. It is reachable  
 -- from at least some other N\_PORT, but not  
 -- necessarily from all N\_PORTS.

--

-- Strictly speaking, this status implies that  
 -- both the N\_PORT\_OUTPUT N\_PORT\_INPUT that have  
 -- been DEFINEd to constitute the N\_PORT are  
 -- UNCONNECTED (in the PORT\_STATE\_TYPE  
 -- sense).

--

CONNECTED\_PP, -- The designated N\_PORT is currently  
 -- connected to one other N\_PORT in a point-to  
 -- point configuration.

--

-- To be CONNECTED implies that both the  
 -- N\_PORT\_OUTPUT AND\_N\_PORT\_INPUT that have  
 -- been DEFINEd to constitute the N\_PORT

-- are CONNECTED (in the PORT\_STATE\_TYPE sense) to the OUTPUT\_PORT and INPUT\_PORT, respectively, of another defined N\_PORT.

--

CONNECTED\_LOOP,-- The designated N\_PORT is currently

-- connected to two other N\_PORTS in a

-- (potential) loop configuration.

--

-- To be CONNECTED implies that both the

-- N\_PORT\_OUTPUT AND N\_PORT\_INPUT that have

-- been DEFINED to constitute the N\_PORT

-- are CONNECTED (in the PORT\_STATE\_TYPE sense) to the OUTPUT\_PORT and INPUT\_PORT, respectively, of the other defined N\_PORTS.

--

-- Even though the name is CONNECTED\_LOOP, there

-- is no guarantee that the loop is closed. It

-- is left up to the user to determine this.

--

REACHABLE, -- This status only applies in cases in which one

-- or two other N\_PORT have also been designated.

-- If one other N\_PORT is designated, this value

-- indicates that the two N\_PORTS can be connected

-- to each other in a point-to-point configuration

-- without affecting any existing connections.

-- If two other N\_PORTS are designated, this value

-- indicates that the N\_PORTS can be connected to

-- each other in a loop configuration.

--

REARRANGEABLE,-- This status only applies in cases in which one

-- or two other N\_PORT have also been designated.

-- The meanings are similar to those for the

-- REACHABLE status value; except that one or more

-- existing connections will have to be changed in

-- order to establish the indicated configuration.

--

ISOLATED, -- The designated N\_PORT is not currently

-- connected to any other N\_PORT; and cannot be

-- connected by any path in the link switch. (This

-- is an indication that at least one failure

-- has occurred in the link switch.)

--

UNDEFINED, -- One of the N\_PORTS has not been DEFINED.

--

OTHER); -- This value is used to cover any situation not

-- specifically included in any of the other

-- status values. This would include such

-- situations as where the N\_PORT\_INPUT of the

-- subject N\_PORT is connected to the N\_PORT\_OUTPUT

-- of another N\_PORT, but its N\_PORT\_OUTPUT is

-- unconnected.

--

-- The N\_PORT\_INFO\_TYPE is used to carry information about the

-- setting of the link switch connected to a designated N\_PORT. The

-- SWITCH component indicates to which link switch the N\_PORT is

-- connected; and the N\_PORT\_OUTPUT and N\_PORT\_INPUT components

-- indicate to which input port and output port on that link switch

-- the N\_PORT is connected.

--

-- If the designated N\_PORT is CONNECTED\_PP, both the

-- UPSTREAM and the DOWNSTREAM components are set to the

```

-- value of the connected N_PORT.
--
-- If the designated N_PORT is CONNECTED_LOOP, the UPSTREAM
-- component indicates the N_PORT whose output is connected to
-- the designated N_PORT's input port; and the DOWNSTREAM
-- component indicates the N_PORT whose input is connected to
-- the designated N_PORT's output port.
--
type N_PORT_INFO_TYPE is record
  N_PORT_OUTPUT : INPUT_PORT_TYPE := NULL_PORT;
  N_PORT_INPUT  : OUTPUT_PORT_TYPE := NULL_PORT;
  SWITCH       : SWITCH_ADDRESS_TYPE := NULL_SWITCH;
  STATE        : N_PORT_STATE_TYPE := UNDEFINED;
  UPSTREAM     : N_PORT_TYPE := NULL_N_PORT;
  DOWNSTREAM   : N_PORT_TYPE := NULL_N_PORT;
end record;

type N_PORT_SWITCH_STATUS_TYPE is array (0 .. (MAX_N_PORTS - 1))
  of N_PORT_INFO_TYPE;

type OUTPUT_STATUS_ARRAY_TYPE
  is array (0 .. (NUMBER_OF_OUTPUT_PORTS - 1))
  of PORT_STATE_TYPE;

--
-- The INPUT_PORT_STATUS_TYPE record contains information about
-- a designated input port on a designated link switch.
--
-- The STATE array contains the status of each output port on the
-- designated link switch relative to the designated input port. The
-- index to the array is the output port number.
--
-- If the designated port has been defined to be part of an N_PORT,
-- that N_PORT is indicated in the PARENT component. Otherwise
-- that component contains the NULL_N_PORT value.
--
type INPUT_PORT_STATUS_TYPE
  is record
    STATE : OUTPUT_STATUS_ARRAY_TYPE;
    PARENT : N_PORT_TYPE := NULL_N_PORT;
  end record;

--
-- The OUTPUT_PORT_STATUS_TYPE record contains information about
-- a designated output port on a designated link switch.
--
-- If the designated port is CONNECTED to an input port on the
-- link switch, that port is indicated in the OUTPUT_PORT component of
-- the record. Otherwise that component contains the NULL_PORT
-- value.
--
-- If the designated port has been defined to be part of an N_PORT,
-- that N_PORT is indicated in the PARENT component. Otherwise
-- that component contains the NULL_N_PORT value.
--
type OUTPUT_PORT_STATUS_TYPE
  is record
    STATE : PORT_STATE_TYPE;
    INPUT_PORT : INPUT_PORT_TYPE;
    PARENT : N_PORT_TYPE := NULL_N_PORT;
  end record;

```